

8. THRUST BALL BEARINGS

INTRODUCTION ..... C 296

BEARING TABLES

SINGLE-DIRECTION THRUST BALL BARINGS

With Flat Seat, Aligning Seat, or Aligning Seat Washer

Bore Diameter 10 – 360 mm ..... C 298

DOUBLE-DIRECTION THRUST BALL BEARINGS

With Flat Seat, Aligning Seat, or Aligning Seat Washer

Bore Diameter 10 – 190 mm ..... C 306

DESIGN, TYPES, AND FEATURES

THRUST BALL BEARINGS

Thrust ball bearings are classified into those with flat seats or aligning seats, depending on the shape of the outer ring seat (housing washer). They can sustain axial loads but no radial loads.

Available Series of thrust ball bearings available are shown in Table 1.

For single-direction thrust ball bearings, pressed-steel cages and machined-brass cages are usually used as shown in Table 2. The cages in double-direction thrust ball bearings are the same as those in single-direction thrust ball bearings of the same Diameter Series.

The basic load ratings listed in the bearing tables are based on the standard cage type shown in Table 2. If the type of cage is different for bearings with the same number, the number of balls may vary; in such cases, the load rating will differ from that listed in the bearing tables.

Table1 Series of Thrust Ball Bearings

	W/Flat Seat	W/Aligning Seat	W/Aligning Seat Washer
Single-Direction	511	—	—
	512	532	532U
	513	533	533U
	514	534	534U
Double-Direction	522	542	542U
	523	543	543U
	524	544	544U

Table 2 Standard Cages for Thrust Ball Bearings

Pressed Steel	Machined Brass
51100 – 51152X 51200 – 51236X 51305 – 51336X	51156X – 51172X 51238X – 51272X 51338X – 51340X
51405 – 51418X 53200 – 53236X 53305 – 53336X 53405 – 53418X	51420X – 51436X 53238X – 53272X 53338X – 53340X 53420X – 53436X

TOLERANCES AND RUNNING ACCURACY

THRUST BALL BEARINGS ..... Table 7.6 (Pages A140 to A142)

RECOMMENDED FITS


THRUST BALL BEARINGS .....Table 8.4 (Pages A164)
Table 8.6 (Pages A165)

MINIMUM AXIAL LOAD


Be sure to apply some axial load to thrust bearings to prevent slippage between the rolling elements and raceways. For more details, please refer to Page A198.

■SINGLE-DIRECTION THRUST BALL BEARINGS


Bore Diameter 10 – 50 mm




With Flat Seat





With Aligning Seat



With Aligning Seat Washer









Boundary Dimensions (mm)						Basic Load Ratings (N)		Limiting Speeds (min^{-1})		Bearing	Designations		Dimensions (mm)							Abutment and Fillet Dimensions (mm)			Mass (kg) approx.		
d	D	T	T_3	T_4	r min.	C_a	C_{0a}	Grease	Oil	With Flat Seat	With Aligning Seat	With Aligning Seat Washer	d_1	D_1	D_2	D_3	b	A	R	d_a min.	D_a max.	r_a max.	With Flat Seat	With Aligning Seat	With Aligning Seat Washer
10	24	9	—	—	0.3	10 100	14 000	6 700	10 000	**51100**	—	—	24	11	—	—	—	—	—	18	16	0.3	0.019	—	—
	26	11	11.6	13	0.6	12 800	17 100	6 000	9 000	**51200**	**53200**	**53200 U**	26	12	18	28	3.5	8.5	22	20	16	0.6	0.028	0.029	0.036
12	26	9	—	—	0.3	10 400	15 400	6 700	10 000	**51101**	—	—	26	13	—	—	—	—	—	20	18	0.3	0.021	—	—
	28	11	11.4	13	0.6	13 300	19 000	5 600	8 500	**51201**	**53201**	**53201 U**	28	14	20	30	3.5	11.5	25	22	18	0.6	0.031	0.031	0.039
15	28	9	—	—	0.3	10 600	16 800	6 300	9 500	**51102**	—	—	28	16	—	—	—	—	—	23	20	0.3	0.023	—	—
	32	12	13.3	15	0.6	16 700	24 800	5 000	7 500	**51202**	**53202**	**53202 U**	32	17	24	35	4	12	28	25	22	0.6	0.043	0.048	0.059
17	30	9	—	—	0.3	11 400	19 500	6 000	9 000	**51103**	—	—	30	18	—	—	—	—	—	25	22	0.3	0.025	—	—
	35	12	13.2	15	0.6	17 300	27 300	4 800	7 500	**51203**	**53203**	**53203 U**	35	19	26	38	4	16	32	28	24	0.6	0.050	0.055	0.069
20	35	10	—	—	0.3	15 100	26 600	5 300	8 000	**51104**	—	—	35	21	—	—	—	—	—	29	26	0.3	0.037	—	—
	40	14	14.7	17	0.6	22 500	37 500	4 300	6 300	**51204**	**53204**	**53204 U**	40	22	30	42	5	18	36	32	28	0.6	0.077	0.080	0.096
25	42	11	—	—	0.6	19 700	37 000	4 800	7 100	**51105**	—	—	42	26	—	—	—	—	—	35	32	0.6	0.056	—	—
	47	15	16.7	19	0.6	28 000	50 500	3 800	5 600	**51205**	**53205**	**53205 U**	47	27	36	50	5.5	19	40	38	34	0.6	0.111	0.123	0.151
	52	18	19.8	22	1	36 000	61 500	3 200	5 000	**51305**	**53305**	**53305 U**	52	27	38	55	6	21	45	41	36	1	0.169	0.182	0.224
	60	24	26.4	29	1	56 000	89 500	2 600	4 000	**51405**	**53405**	**53405 U**	60	27	42	62	8	19	50	46	39	1	0.334	0.353	0.426
30	47	11	—	—	0.6	20 600	42 000	4 300	6 700	**51106**	—	—	47	32	—	—	—	—	—	40	37	0.6	0.064	—	—
	52	16	17.8	20	0.6	29 500	58 000	3 400	5 300	**51206**	**53206**	**53206 U**	52	32	42	55	5.5	22	45	43	39	0.6	0.137	0.154	0.183
	60	21	22.6	25	1	43 000	78 500	2 800	4 300	**51306**	**53306**	**53306 U**	60	32	45	62	7	22	50	48	42	1	0.267	0.28	0.336
	70	28	30.1	33	1	73 000	126 000	2 200	3 400	**51406**	**53406**	**53406 U**	70	32	50	75	9	20	56	54	46	1	0.519	0.535	0.666
35	52	12	—	—	0.6	22 100	49 500	4 000	6 000	**51107**	—	—	52	37	—	—	—	—	—	45	42	0.6	0.081	—	—
	62	18	19.9	22	1	39 500	78 000	3 000	4 500	**51207**	**53207**	**53207 U**	62	37	48	65	7	24	50	51	46	1	0.21	0.231	0.292
	68	24	25.6	28	1	56 000	105 000	2 400	3 800	**51307**	**53307**	**53307 U**	68	37	52	72	7.5	24	56	55	48	1	0.386	0.403	0.488
	80	32	34	37	1.1	87 500	155 000	2 000	3 000	**51407**	**53407**	**53407 U**	80	37	58	85	10	23	64	62	53	1	0.769	0.785	0.967
40	60	13	—	—	0.6	27 100	63 000	3 600	5 300	**51108**	—	—	60	42	—	—	—	—	—	52	48	0.6	0.12	—	—
	68	19	20.3	23	1	47 500	98 500	2 800	4 300	**51208**	**53208**	**53208 U**	68	42	55	72	7	28.5	56	57	51	1	0.27	0.289	0.355
	78	26	28.5	31	1	70 000	135 000	2 200	3 400	**51308**	**53308**	**53308 U**	78	42	60	82	8.5	28	64	63	55	1	0.536	0.581	0.704
	90	36	38.2	42	1.1	103 000	188 000	1 700	2 600	**51408**	**53408**	**53408 U**	90	42	65	95	12	26	72	70	60	1	1.1	1.12	1.38
45	65	14	—	—	0.6	28 100	69 000	3 400	5 000	**51109**	—	—	65	47	—	—	—	—	—	57	53	0.6	0.143	—	—
	73	20	21.3	24	1	48 000	105 000	2 600	4 000	**51209**	**53209**	**53209 U**	73	47	60	78	7.5	26	56	62	56	1	0.31	0.333	0.419
	85	28	30.1	33	1	80 500	163 000	2 000	3 000	**51309**	**53309**	**53309 U**	85	47	65	90	10	25	64	69	61	1	0.672	0.702	0.888
	100	39	42.4	46	1.1	128 000	246 000	1 600	2 400	**51409**	**53409**	**53409 U**	100	47	72	105	12.5	29	80	78	67	1	1.46	1.53	1.87
50	70	14	—	—	0.6	29 000	75 500	3 200	4 800	**51110**	—	—	70	52	—	—	—	—	—	62	58	0.6	0.153	—	—
	78	22	23.5	26	1	49 000	111 000	2 400	3 600	**51210**	**53210**	**53210 U**	78	52	62	82	7.5	32.5	64	67	61	1	0.378	0.404	0.504
	95	31	34.3	37	1.1	97 500	202 000	1 800	2 800	**51310**	**53310**	**53310 U**	95	52	72	100	11	28	72	77	68	1	0.931	1.01	1.27
	110	43	45.6	50	1.5	147 000	288 000	1 400	2 200	**51410**	**53410**	**53410 U**	110	52	80	115	14	35	90	86	74	1.5	1.94	1.98	2.41

SINGLE-DIRECTION THRUST BALL BEARINGS


Bore Diameter 55 – 100 mm




With Flat Seat





With Aligning Seat



With Aligning Seat Washer








Boundary Dimensions (mm)						Basic Load Ratings (N)		Limiting Speeds (min^{-1})		Bearing	Designations[1]		Dimensions (mm)							Abutment and Fillet Dimensions (mm)			Mass (kg) approx.		
d	D	T	T_3	T_4	r min.	C_a	C_{0a}	Grease	Oil	With Flat Seat	With Aligning Seat	With Aligning Seat Washer	d_1	D_1	D_2	D_3	b	A	R	d_a min.	D_a max.	r_a max.	With Flat Seat	With Aligning Seat	With Aligning Seat Washer
55	78	16	—	—	0.6	35 000	93 000	2 800	4 300	**51111**	—	—	78	57	—	—	—	—	—	69	64	0.6	0.227	—	—
	90	25	27.3	30	1	70 000	159 000	2 200	3 200	**51211**	**53211 U**	**53211 U**	90	57	72	95	9	35	72	76	69	1	0.599	0.656	0.819
	105	35	39.3	42	1.1	115 000	244 000	1 600	2 400	**51311**	**53311 U**	**53311 U**	105	57	80	110	11.5	30	80	85	75	1	1.31	1.45	1.78
	120	48	50.5	55	1.5	181 000	350 000	1 300	1 900	**51411**	**53411 U**	**53411 U**	120	57	88	125	15.5	28	90	94	81	1.5	2.58	2.59	3.16
60	85	17	—	—	1	41 500	113 000	2 600	4 000	**51112**	—	—	85	62	—	—	—	—	—	75	70	1	0.281	—	—
	95	26	28	31	1	71 500	169 000	2 000	3 000	**51212**	**53212 U**	**53212 U**	95	62	78	100	9	32.5	72	81	74	1	0.673	0.731	0.897
	110	35	38.3	42	1.1	119 000	263 000	1 600	2 400	**51312**	**53312 U**	**53312 U**	110	62	85	115	11.5	41	90	90	80	1	1.4	1.51	1.83
	130	51	54	58	1.5	202 000	395 000	1 200	1 800	**51412**	**53412 U**	**53412 U**	130	62	95	135	16	34	100	102	88	1.5	3.16	3.2	3.91
65	90	18	—	—	1	42 000	117 000	2 400	3 800	**51113**	—	—	90	67	—	—	—	—	—	80	75	1	0.324	—	—
	100	27	28.7	32	1	75 500	189 000	1 900	2 800	**51213**	**53213 U**	**53213 U**	100	67	82	105	9	40	80	86	79	1	0.756	0.812	0.989
	115	36	39.4	43	1.1	123 000	282 000	1 500	2 400	**51313**	**53313 U**	**53313 U**	115	67	90	120	12.5	38.5	90	95	85	1	1.54	1.67	2.04
	140	56	60.2	65	2	234 000	495 000	1 100	1 700	**51413**	**53413 U**	**53413 U**	140	68	100	145	17.5	40	112	110	95	2	4.1	4.22	5.13
70	95	18	—	—	1	43 500	127 000	2 400	3 600	**51114**	—	—	95	72	—	—	—	—	—	85	80	1	0.346	—	—
	105	27	28.8	32	1	74 000	189 000	1 900	2 800	**51214**	**53214 U**	**53214 U**	105	72	88	110	9	38	80	91	84	1	0.793	0.866	1.05
	125	40	44.2	48	1.1	137 000	315 000	1 400	2 000	**51314**	**53314 U**	**53314 U**	125	72	98	130	13	43	100	103	92	1	2.0	2.2	2.64
	150	60	63.6	69	2	252 000	555 000	1 000	1 500	**51414**	**53414 U**	**53414 U**	150	73	110	155	19.5	34	112	118	102	2	5.05	5.12	6.21
75	100	19	—	—	1	43 500	131 000	2 200	3 400	**51115**	—	—	100	77	—	—	—	—	—	90	85	1	0.389	—	—
	110	27	28.3	32	1	78 000	209 000	1 800	2 800	**51215**	**53215 U**	**53215 U**	110	77	92	115	9.5	49	90	96	89	1	0.845	1.27	1.11
	135	44	48.1	52	1.5	159 000	365 000	1 300	1 900	**51315**	**53315 U**	**53315 U**	135	77	105	140	15	37	100	111	99	1.5	2.6	2.8	3.42
	160	65	69	75	2	254 000	560 000	950	1 400	**51415**	**53415 U**	**53415 U**	160	78	115	165	21	42	125	125	110	2	6.15	6.23	7.58
80	105	19	—	—	1	45 000	141 000	2 200	3 400	**51116**	—	—	105	82	—	—	—	—	—	95	90	1	0.417	—	—
	115	28	29.5	33	1	79 000	218 000	1 800	2 600	**51216**	**53216 U**	**53216 U**	115	82	98	120	10	46	90	101	94	1	0.931	1.01	1.23
	140	44	47.6	52	1.5	164 000	395 000	1 300	1 900	**51316**	**53316 U**	**53316 U**	140	82	110	145	15	50	112	116	104	1.5	2.74	2.94	3.55
	170	68	72.2	78	2.1	272 000	620 000	900	1 300	**51416**	**53416 U**	**53416 U**	170	83	125	175	22	36	125	133	117	2	7.21	7.33	8.9
85	110	19	—	—	1	46 500	150 000	2 200	3 200	**51117**	—	—	110	87	—	—	—	—	—	100	95	1	0.44	—	—
	125	31	33.1	37	1	96 000	264 000	1 600	2 400	**51217**	**53217 U**	**53217 U**	125	88	105	130	11	52	100	109	101	1	1.22	1.35	1.63
	150	49	53.1	58	1.5	207 000	490 000	1 100	1 700	**51317**	**53317 U**	**53317 U**	150	88	115	155	17.5	43	112	124	111	1.5	3.57	3.78	4.67
	180	72	77	83	2.1	310 000	755 000	850	1 300	**51417 X**	**53417 X**	**53417 XU**	177	88	130	185	23	47	140	141	124	2	8.51	8.72	10.4
90	120	22	—	—	1	60 000	190 000	1 900	3 000	**51118**	—	—	120	92	—	—	—	—	—	108	102	1	0.646	—	—
	135	35	38.5	42	1.1	114 000	310 000	1 400	2 200	**51218**	**53218 U**	**53218 U**	135	93	110	140	13.5	45	100	117	108	1	1.69	1.89	2.38
	155	50	54.6	59	1.5	214 000	525 000	1 100	1 700	**51318**	**53318 U**	**53318 U**	155	93	120	160	18	40	112	129	116	1.5	3.83	4.11	5.09
	190	77	81.2	88	2.1	330 000	825 000	800	1 200	**51418 X**	**53418 X**	**53418 XU**	187	93	140	195	25.5	40	140	149	131	2	10.2	10.3	12.4
100	135	25	—	—	1	86 000	268 000	1 700	2 600	**51120**	—	—	135	102	—	—	—	—	—	121	114	1	0.96	—	—
	150	38	40.9	45	1.1	135 000	375 000	1 300	2 000	**51220**	**53220 U**	**53220 U**	150	103	125	155	14	52	112	130	120	1	2.25	2.49	3.03
	170	55	59.2	64	1.5	239 000	595 000	1 000	1 500	**51320**	**53320 U**	**53320 U**	170	103	135	175	18	46	125	142	128	1.5	4.98	5.31	6.37
	210	85	90	98	3	370 000	985 000	710	1 100	**51420 X**	**53420 X**	**53420 XU**	205	103	155	220	27	50	160	165	145	2.5	14.8	15	18.1


Note (1) The outside diameter d_1 of shaft washers for bearing designations with an X is smaller than the outside diameter D of the housing washers.

SINGLE-DIRECTION THRUST BALL BEARINGS


Bore Diameter 110 – 190 mm




With Flat Seat





With Aligning Seat



With Aligning Seat Washer








Boundary Dimensions (mm)						Basic Load Ratings (N)		Limiting Speeds (min^{-1})		Bearing	Designations[1]		Dimensions (mm)							Abutment and Fillet Dimensions (mm)			Mass (kg) approx.		
d	D	T	T_3	T_4	r min.	C_a	C_{0a}	Grease	Oil	With Flat Seat	With Aligning Seat	With Aligning Seat Washer	d_1	D_1	D_2	D_3	b	A	R	d_a min.	D_a max.	r_a max.	With Flat Seat	With Aligning Seat	With Aligning Seat Washer
110	145	25	—	—	1	88 000	288 000	1 700	2 400	**51122**	—	—	145	112	—	—	—	—	—	131	124	1	1.04	—	—
	160	38	40.2	45	1.1	136 000	395 000	1 300	1 900	**51222**	**53222**	**53222 U**	160	113	135	165	14	65	125	140	130	1	2.42	2.65	3.2
	190	63	67.2	72	2	282 000	755 000	900	1 300	**51322 X**	**53322 X**	**53322 XU**	187	113	150	195	20.5	51	140	158	142	2	7.19	7.55	9.1
	230	95	99.7	109	3	415 000	1 150 000	630	950	**51422 X**	**53422 X**	**53422 XU**	225	113	170	240	29	59	180	181	159	2.5	20	20.5	24.3
120	155	25	—	—	1	90 000	310 000	1 600	2 400	**51124**	—	—	155	122	—	—	—	—	—	141	134	1	1.12	—	—
	170	39	40.8	46	1.1	141 000	430 000	1 200	1 800	**51224**	**53224**	**53224 U**	170	123	145	175	15	61	125	150	140	1	2.7	2.94	3.58
	210	70	74.1	80	2.1	330 000	930 000	800	1 200	**51324 X**	**53324 X**	**53324 XU**	205	123	165	220	22	63	160	173	157	2	9.7	10.1	12.4
	250	102	107.3	118	4	480 000	1 400 000	600	900	**51424 X**	**53424 X**	**53424 XU**	245	123	185	260	32	70	200	196	174	3	26.2	26.5	31.3
130	170	30	—	—	1	105 000	350 000	1 400	2 000	**51126**	—	—	170	132	—	—	—	—	—	154	146	1	1.68	—	—
	190	45	47.9	53	1.5	183 000	550 000	1 100	1 600	**51226 X**	**53226 X**	**53226 XU**	187	133	160	195	17	67	140	166	154	1.5	3.95	4.35	5.33
	225	75	80.3	86	2.1	350 000	1 030 000	750	1 100	**51326 X**	**53326 X**	**53326 XU**	220	134	177	235	26	53	160	186	169	2	12.1	12.7	15.8
	270	110	115.2	128	4	525 000	1 590 000	530	800	**51426 X**	**53426 X**	**53426 XU**	265	134	200	280	38	58	200	212	188	3	32.3	32.4	38.8
140	180	31	—	—	1	107 000	375 000	1 300	2 000	**51128 X**	—	—	178	142	—	—	—	—	—	164	156	1	1.83	—	—
	200	46	48.6	55	1.5	186 000	575 000	1 000	1 500	**51228 X**	**53228 X**	**53228 XU**	197	143	170	210	17	87	160	176	164	1.5	4.3	4.74	5.89
	240	80	84.9	92	2.1	370 000	1 130 000	670	1 000	**51328 X**	**53328 X**	**53328 XU**	235	144	190	250	26	68	180	199	181	2	14.2	16.3	19.5
	280	112	117	131	4	550 000	1 750 000	530	800	**51428 X**	**53428 X**	**53428 XU**	275	144	206	290	38	83	225	222	198	3	34.7	34.8	41.4
150	190	31	—	—	1	110 000	400 000	1 300	1 900	**51130 X**	—	—	188	152	—	—	—	—	—	174	166	1	1.95	—	—
	215	50	53.3	60	1.5	238 000	735 000	950	1 400	**51230 X**	**53230 X**	**53230 XU**	212	153	180	225	20.5	79	160	189	176	1.5	5.52	6.09	7.82
	250	80	83.7	92	2.1	380 000	1 200 000	670	1 000	**51330 X**	**53330 X**	**53330 XU**	245	154	200	260	26	89.5	200	209	191	2	15	17.3	20.5
	300	120	125.9	140	4	620 000	2 010 000	480	710	**51430 X**	**53430 X**	**53430 XU**	295	154	225	310	41	69	225	238	212	3	43.5	43.8	51.9
160	200	31	—	—	1	113 000	425 000	1 200	1 900	**51132 X**	—	—	198	162	—	—	—	—	—	184	176	1	2.07	—	—
	225	51	54.7	61	1.5	249 000	805 000	900	1 400	**51232 X**	**53232 X**	**53232 XU**	222	163	190	235	21	74	160	199	186	1.5	6.04	6.78	8.7
	270	87	91.7	100	3	475 000	1 570 000	600	900	**51332 X**	**53332 X**	**53332 XU**	265	164	215	280	29	77	200	225	205	2.5	19.6	22.3	26.7
	320	130	135.3	150	5	650 000	2 210 000	450	670	**51432 X**	**53432 X**	**53432 XU**	315	164	240	330	41.5	84	250	254	226	4	52.7	52.9	62
170	215	34	—	—	1.1	135 000	510 000	1 100	1 700	**51134 X**	—	—	213	172	—	—	—	—	—	197	188	1	2.72	—	—
	240	55	58.7	65	1.5	280 000	915 000	850	1 300	**51234 X**	**53234 X**	**53234 XU**	237	173	200	250	21.5	91	180	212	198	1.5	7.41	8.21	10.5
	280	87	91.3	100	3	465 000	1 570 000	600	900	**51334 X**	**53334 X**	**53334 XU**	275	174	220	290	29	105	225	235	215	2.5	20.3	23.2	28
	340	135	141	156	5	715 000	2 480 000	430	630	**51434 X**	**53434 X**	**53434 XU**	335	174	255	350	46	74	250	269	241	4	61.2	61.3	73
180	225	34	—	—	1.1	136 000	530 000	1 100	1 700	**51136 X**	—	—	222	183	—	—	—	—	—	207	198	1	2.79	—	—
	250	56	58.2	66	1.5	284 000	955 000	800	1 200	**51236 X**	**53236 X**	**53236 XU**	247	183	210	260	21.5	112	200	222	208	1.5	7.94	8.57	10.8
	300	95	99.3	109	3	480 000	1 680 000	560	850	**51336 X**	**53336 X**	**53336 XU**	295	184	240	310	32	91	225	251	229	2.5	25.9	29.2	34.9
	360	140	148.3	164	5	750 000	2 730 000	400	600	**51436 X**	**53436 X**	**53436 XU**	355	184	270	370	46.5	97	280	285	255	4	70.5	72.1	84.9
190	240	37	—	—	1.1	172 000	655 000	1 000	1 600	**51138 X**	—	—	237	193	—	—	—	—	—	220	210	1	3.6	—	—
	270	62	65.7	73	2	320 000	1 110 000	750	1 100	**51238 X**	**53238 X**	**53238 XU**	267	194	230	280	23	98	200	238	222	2	11.8	12.9	15.7
	320	105	111	121	4	550 000	1 960 000	500	750	**51338 X**	**53338 X**	**53338 XU**	315	195	255	330	33	104	250	266	244	3	36.5	38.1	44.7


Note (1) The outside diameter d_1 of shaft washers for bearing designations with an X is smaller than the outside diameter D of the housing washers.

SINGLE-DIRECTION THRUST BALL BEARINGS


Bore Diameter 200 – 360 mm




With Flat Seat





With Aligning Seat



With Aligning Seat Washer








Boundary Dimensions (mm)						Basic Load Ratings (N)		Limiting Speeds (min^{-1})		Bearing	Designations[1]		Dimensions (mm)							Abutment and Fillet Dimensions (mm)			Mass (kg) approx.		
d	D	T	T_3	T_4	r min.	C_a	C_{0a}	Grease	Oil	With Flat Seat	With Aligning Seat	With Aligning Seat Washer	d_1	D_1	D_2	D_3	b	A	R	d_a min.	D_a max.	r_a max.	With Flat Seat	With Aligning Seat	With Aligning Seat Washer
200	250	37	—	—	1.1	173 000	675 000	1 000	1 500	**51140 X**	—	—	247	203	—	—	—	—	—	230	220	1	3.75	—	—
	280	62	65.3	74	2	315 000	1 110 000	710	1 100	**51240 X**	**53240 X**	**53240 XU**	277	204	240	290	23	125	225	248	232	2	12.3	13.4	16.1
	340	110	118.4	130	4	600 000	2 220 000	480	710	**51340 X**	**53340 X**	**53340 XU**	335	205	270	350	38	92	250	282	258	3	43.6	46.2	54.8
220	270	37	—	—	1.1	179 000	740 000	950	1 500	**51144 X**	—	—	267	223	—	—	—	—	—	250	240	1	4.09	—	—
	300	63	65.6	75	2	325 000	1 210 000	670	1 000	**51244 X**	**53244 X**	**53244 XU**	297	224	260	310	25	118	225	268	252	2	13.6	14.9	18
240	300	45	—	—	1.5	229 000	935 000	850	1 200	**51148 X**	—	—	297	243	—	—	—	—	—	276	264	1.5	6.55	—	—
	340	78	81.6	92	2.1	420 000	1 650 000	560	850	**51248 X**	**53248 X**	**53248 XU**	335	244	290	350	30	122	250	299	281	2	23.7	25.6	30.7
260	320	45	—	—	1.5	233 000	990 000	800	1 200	**51152 X**	—	—	317	263	—	—	—	—	—	296	284	1.5	7.01	—	—
	360	79	82.8	93	2.1	435 000	1 800 000	560	850	**51252 X**	**53252 X**	**53252 XU**	355	264	305	370	30	152	280	319	301	2	25.1	27.3	33.2
280	350	53	—	—	1.5	315 000	1 310 000	710	1 000	**51156 X**	—	—	347	283	—	—	—	—	—	322	308	1.5	12	—	—
	380	80	85	94	2.1	450 000	1 950 000	530	800	**51256 X**	**53256 X**	**53256 XU**	375	284	325	390	31	143	280	339	321	2	27.1	30.3	37
300	380	62	—	—	2	360 000	1 560 000	600	900	**51160 X**	—	—	376	304	—	—	—	—	—	348	332	2	17.2	—	—
	420	95	100.5	112	3	540 000	2 410 000	450	670	**51260 X**	**53260 X**	**53260 XU**	415	304	360	430	34	164	320	371	349	2.5	43.5	47.7	56.1
320	400	63	—	—	2	365 000	1 660 000	600	900	**51164 X**	—	—	396	324	—	—	—	—	—	368	352	2	18.6	—	—
	440	95	100.5	112	3	585 000	2 680 000	450	670	**51264 X**	**53264 X**	**53264 XU**	435	325	380	450	36	157	320	391	369	2.5	45	49.9	59.4
340	420	64	—	—	2	375 000	1 760 000	560	850	**51168 X**	—	—	416	344	—	—	—	—	—	388	372	2	19.9	—	—
	460	96	100.3	113	3	595 000	2 800 000	430	630	**51268 X**	**53268 X**	**53268 XU**	455	345	400	470	36	199	360	411	389	2.5	47.9	52.7	62
360	440	65	—	—	2	385 000	1 860 000	560	800	**51172 X**	—	—	436	364	—	—	—	—	—	408	392	2	21.5	—	—
	500	110	116.7	130	4	705 000	3 500 000	380	560	**51272 X**	**53272 X**	**53272 XU**	495	365	430	510	43	172	360	442	418	3	68.8	76.3	90.9


Note (1) The outside diameter d_1 of shaft washers for bearing designations with an X is smaller than the outside diameter D of the housing washers.

DOUBLE-DIRECTION THRUST BALL BEARINGS


Bore Diameter 10 – 55 mm




With Flat Seat





With Aligning Seat



With Aligning Seat Washer









Boundary Dimensions (mm)								Basic Load Ratings (N)		Limiting Speeds (min^{-1})		Bearing		Designations	Dimensions (mm)										Abutment and Fillet Dimensions (mm)			Mass (kg) approx.		
d_2	d	D	T_1	T_5	T_7	r min.	r_1 min.	C_a	C_{0a}	Grease	Oil	With Flat Seat	With Aligning Seat	With Aligning Seat Washer	d_3	D_1	D_2	D_3	T_2	T_6	T_8	B	b	A_1	R	D_a max.	r_a max.	r_b max.	With Flat Seat	With Aligning Seat	With Aligning Seat Washer
10	15	32	22	24.6	28	0.6	0.3	16 700	24 800	4 800	7 100	**52202**	**54202**	**54202 U**	32	17	24	35	13.5	14.8	16.5	5	4	10.5	28	24	0.6	0.3	0.081	0.090	0.113
15	20	40	26	27.4	32	0.6	0.3	22 500	37 500	4 000	6 000	**52204**	**54204**	**54204 U**	40	22	30	42	16	16.7	19	6	5	16	36	30	0.6	0.3	0.148	0.151	0.185
	25	60	45	49.8	55	1	0.6	56 000	89 500	2 400	3 600	**52405**	**54405**	**54405 U**	60	27	42	62	28	30.4	33	11	8	15	50	42	1	0.6	0.641	0.68	0.825
20	25	47	28	31.4	36	0.6	0.3	28 000	50 500	3 400	5 300	**52205**	**54205**	**54205 U**	47	27	36	50	17.5	19.2	21.5	7	5.5	16.5	40	36	0.6	0.3	0.213	0.236	0.293
	25	52	34	37.6	42	1	0.3	36 000	61 500	3 000	4 500	**52305**	**54305**	**54305 U**	52	27	38	55	21	22.8	25	8	6	18	45	38	1	0.3	0.324	0.35	0.434
	30	70	52	56.2	62	1	0.6	73 000	126 000	2 200	3 200	**52406**	**54406**	**54406 U**	70	32	50	75	32	34.1	37	12	9	16	56	50	1	0.6	0.978	1.01	1.27
25	30	52	29	32.6	37	0.6	0.3	29 500	58 000	3 200	5 000	**52206**	**54206**	**54206 U**	52	32	42	55	18	19.8	22	7	5.5	20	45	42	0.6	0.3	0.254	0.288	0.345
	30	60	38	41.2	46	1	0.3	43 000	78 500	2 600	4 000	**52306**	**54306**	**54306 U**	60	32	45	62	23.5	25.1	27.5	9	7	19.5	50	45	1	0.3	0.483	0.511	0.621
	35	80	59	63	69	1.1	0.6	87 500	155 000	1 800	2 800	**52407**	**54407**	**54407 U**	80	37	58	85	36.5	38.5	41.5	14	10	18.5	64	58	1	0.6	1.43	1.47	1.83
30	35	62	34	37.8	42	1	0.3	39 500	78 000	2 800	4 300	**52207**	**54207**	**54207 U**	62	37	48	65	21	22.9	25	8	7	21	50	48	1	0.3	0.406	0.447	0.57
	35	68	44	47.2	52	1	0.3	56 000	105 000	2 400	3 600	**52307**	**54307**	**54307 U**	68	37	52	72	27	28.6	31	10	7.5	21	56	52	1	0.3	0.71	0.744	0.915
	40	68	36	38.6	44	1	0.6	47 500	98 500	2 600	3 800	**52208**	**54208**	**54208 U**	68	42	55	72	22.5	23.8	26.5	9	7	25	56	55	1	0.6	0.543	0.581	0.713
	40	78	49	54	59	1	0.6	70 000	135 000	2 000	3 000	**52308**	**54308**	**54308 U**	78	42	60	82	30.5	33	35.5	12	8.5	23.5	64	60	1	0.6	1.04	1.13	1.38
	40	90	65	69.4	77	1.1	0.6	103 000	188 000	1 700	2 400	**52408**	**54408**	**54408 U**	90	42	65	95	40	42.2	46	15	12	22	72	65	1	0.6	1.98	2.02	2.54
35	45	73	37	39.6	45	1	0.6	48 000	105 000	2 400	3 600	**52209**	**54209**	**54209 U**	73	47	60	78	23	24.3	27	9	7.5	23	56	60	1	0.6	0.606	0.652	0.823
	45	85	52	56.2	62	1	0.6	80 500	163 000	1 900	2 800	**52309**	**54309**	**54309 U**	85	47	65	90	32	34.1	37	12	10	21	64	65	1	0.6	1.28	1.34	1.71
	45	100	72	78.8	86	1.1	0.6	128 000	246 000	1 500	2 200	**52409**	**54409**	**54409 U**	100	47	72	105	44.5	47.9	51.5	17	12.5	23.5	80	72	1	0.6	2.71	2.85	3.53
40	50	78	39	42	47	1	0.6	49 000	111 000	2 400	3 400	**52210**	**54210**	**54210 U**	78	52	62	82	24	25.5	28	9	7.5	30.5	64	62	1	0.6	0.697	0.75	0.949
	50	95	58	64.6	70	1.1	0.6	97 500	202 000	1 700	2 600	**52310**	**54310**	**54310 U**	95	52	72	100	36	39.3	42	14	11	23	72	72	1	0.6	1.78	1.94	2.46
	50	110	78	83.2	92	1.5	0.6	147 000	288 000	1 400	2 000	**52410**	**54410**	**54410 U**	110	52	80	115	48	50.6	55	18	14	30	90	80	1.5	0.6	3.51	3.59	4.45
45	55	90	45	49.6	55	1	0.6	70 000	159 000	2 000	3 000	**52211**	**54211**	**54211 U**	90	57	72	95	27.5	29.8	32.5	10	9	32.5	72	72	1	0.6	1.11	1.22	1.55
	55	105	64	72.6	78	1.1	0.6	115 000	244 000	1 500	2 400	**52311**	**54311**	**54311 U**	105	57	80	110	39.5	43.8	46.5	15	11.5	25.5	80	80	1	0.6	2.43	2.7	3.35
	55	120	87	92	101	1.5	0.6	181 000	350 000	1 200	1 800	**52411**	**54411**	**54411 U**	120	57	88	125	53.5	56	60.5	20	15.5	22.5	90	88	1.5	0.6	4.66	4.68	5.82
50	60	95	46	50	56	1	0.6	71 500	169 000	1 900	3 000	**52212**	**54212**	**54212 U**	95	62	78	100	28	30	33	10	9	30.5	72	78	1	0.6	1.22	1.33	1.66
	60	110	64	70.6	78	1.1	0.6	119 000	263 000	1 500	2 200	**52312**	**54312**	**54312 U**	110	62	85	115	39.5	42.8	46.5	15	11.5	36.5	90	85	1	0.6	2.59	2.82	3.45
	60	130	93	99	107	1.5	0.6	202 000	395 000	1 100	1 700	**52412**	**54412**	**54412 U**	130	62	95	135	57	60	64	21	16	28	100	95	1.5	0.6	5.74	5.82	7.24
	65	140	101	109.4	119	2	1	234 000	495 000	1 000	1 600	**52413**	**54413**	**54413 U**	140	68	100	145	62	66.2	71	23	17.5	34	112	100	2	1	7.41	7.66	9.47
55	65	100	47	50.4	57	1	0.6	75 500	189 000	1 900	2 800	**52213**	**54213**	**54213 U**	100	67	82	105	28.5	30.2	33.5	10	9	38.5	80	82	1	0.6	1.34	1.45	1.81
	65	115	65	71.8	79	1.1	0.6	123 000	282 000	1 500	2 200	**52313**	**54313**	**54313 U**	115	67	90	120	40	43.4	47	15	12.5	34.5	90	90	1	0.6	2.8	3.06	3.8
	70	105	47	50.6	57	1	1	74 000	189 000	1 800	2 800	**52214**	**54214**	**54214 U**	105	72	88	110	28.5	30.3	33.5	10	9	36.5	80	88	1	1	1.44	1.59	1.95
	70	125	72	80.4	88	1.1	1	137 000	315 000	1 300	2 000	**52314**	**54314**	**54314 U**	125	72	98	130	44	48.2	52	16	13	39	100	98	1	1	3.67	4.07	4.95
	70	150	107	114.2	125	2	1	252 000	555 000	1 000	1 500	**52414**	**54414**	**54414 U**	150	73	110	155	65.5	69.1	74.5	24	19.5	28.5	112	110	2	1	8.99	9.12	11.3

DOUBLE-DIRECTION THRUST BALL BEARINGS


Bore Diameter 60 – 130 mm




With Flat Seat





With Aligning Seat



With Aligning Seat Washer








Boundary Dimensions (mm)								Basic Load Ratings (N)		Limiting Speeds (min⁻¹)		Bearing Designations(1)			Dimensions (mm)								Abutment and Fillet Dimensions (mm)			Mass (kg) approx.		
d_2	d	D	T_1	T_5	T_7	r min.	r_1 min.	C_a	C_{0a}	Grease	Oil	With Flat Seat	With Aligning Seat	With Aligning Seat Washer	d_3	D_1	D_2	D_3	T_2	T_6	T_8	B	b	A_1	R	D_a max.	r_a max.	r_b max.	With Flat Seat	With Aligning Seat	With Aligning Seat Washer
60	75	110	47	49.6	57	1	1	78 000	209 000	1 800	2 600	**52215**	**54215**	**54215 U**	110	77	92	115	28.5	29.8	33.5	10	9.5	47.5	90	92	1	1	1.54	1.66	2.06
	75	135	79	87.2	95	1.5	1	159 000	365 000	1 200	1 800	**52315**	**54315**	**54315 U**	135	77	105	140	48.5	52.6	56.5	18	15	32.5	100	105	1.5	1	4.74	5.14	6.38
	75	160	115	123	135	2	1	254 000	560 000	900	1 400	**52415**	**54415**	**54415 U**	160	78	115	165	70.5	74.5	80.5	26	21	36.5	125	115	2	1	10.8	11	13.7
65	80	115	48	51	58	1	1	79 000	218 000	1 700	2 600	**52216**	**54216**	**54216 U**	115	82	98	120	29	30.5	34	10	10	45	90	98	1	1	1.66	1.78	2.21
	80	140	79	86.2	95	1.5	1	164 000	395 000	1 200	1 800	**52316**	**54316**	**54316 U**	140	82	110	145	48.5	52.1	56.5	18	15	45.5	112	110	1.5	1	4.99	5.39	6.61
	80	170	120	128.4	140	2.1	1	272 000	620 000	850	1 300	**52416**	**54416**	**54416 U**	170	83	125	175	73.5	77.7	83.5	27	22	30.5	125	125	2	1	12.6	12.8	16
	85	180	128	138	150	2.1	1.1	310 000	755 000	800	1 200	**52417 X**	**54417 X**	**54417 XU**	179.5	88	130	185	78.5	83.5	89.5	29	23	40.5	140	130	2	1	15.4	15.8	19.5
70	85	125	55	59.2	67	1	1	96 000	264 000	1 500	2 200	**52217**	**54217**	**54217 U**	125	88	105	130	33.5	35.6	39.5	12	11	49.5	100	105	1	1	2.26	2.45	3.02
	85	150	87	95.2	105	1.5	1	207 000	490 000	1 100	1 600	**52317**	**54317**	**54317 U**	150	88	115	155	53	57.1	62	19	17.5	39	112	115	1.5	1	6.38	6.8	10.5
	90	190	135	143.4	157	2.1	1.1	330 000	825 000	750	1 100	**52418 X**	**54418 X**	**54418 XU**	189.5	93	140	195	82.5	86.7	93.5	30	25.5	34.5	140	140	2	1	17.5	18.1	22.5
75	90	135	62	69	76	1.1	1	114 000	310 000	1 400	2 000	**52218**	**54218**	**54218 U**	135	93	110	140	38	41.5	45	14	13.5	42	100	110	1	1	3.09	3.42	4.39
	90	155	88	97.2	106	1.5	1	214 000	525 000	1 100	1 600	**52318**	**54318**	**54318 U**	155	93	120	160	53.5	58.1	62.5	19	18	36.5	112	120	1.5	1	6.79	7.33	9.29
80	100	210	150	160	176	3	1.1	370 000	985 000	670	1 000	**52420 X**	**54420 X**	**54420 XU**	209.5	103	155	220	91.5	96.5	104.5	33	27	43.5	160	155	2.5	1	26.8	27.2	33.4
85	100	150	67	72.8	81	1.1	1	135 000	375 000	1 300	1 900	**52220**	**54220**	**54220 U**	150	103	125	155	41	43.9	48	15	14	49	112	125	1	1	4.08	4.54	5.64
	100	170	97	105.4	115	1.5	1	239 000	595 000	950	1 500	**52320**	**54320**	**54320 U**	170	103	135	175	59	63.2	68	21	18	42	125	135	1.5	1	8.82	9.47	11.6
90	110	230	166	—	—	3	1.1	415 000	1 150 000	600	900	**52422 X**	—	—	229	113	—	—	101.5	—	—	37	—	—	—	159	2.5	1	35.6	—	—
95	110	160	67	71.4	81	1.1	1	136 000	395 000	1 200	1 800	**52222**	**54222**	**54222 U**	160	113	135	165	41	43.2	48	15	14	62	125	135	1	1	4.39	4.83	5.94
	110	190	110	118.4	128	2	1	282 000	755 000	850	1 300	**52322 X**	**54322 X**	**54322 XU**	189.5	113	150	195	67	71.2	76	24	20.5	47	140	150	2	1	12.7	13.5	16.6
	120	250	177	—	—	4	1.5	515 000	1 540 000	560	850	**52424 X**	—	—	249	123	—	—	108.5	—	—	40	—	—	—	174	3	1.5	47.6	—	—
100	120	170	68	71.6	82	1.1	1.1	141 000	430 000	1 200	1 800	**52224**	**54224**	**54224 U**	170	123	145	175	41.5	43.3	48.5	15	15	58.5	125	145	1	1	4.92	5.4	6.68
	120	210	123	131.2	143	2.1	1.1	330 000	930 000	750	1 100	**52324 X**	**54324 X**	**54324 XU**	209.5	123	165	220	75	79.1	85	27	22	58	160	165	2	1	17.6	16.4	22.9
	130	270	192	—	—	4	1.5	525 000	1 590 000	530	800	**52426 X**	—	—	269	134	—	—	117	—	—	42	—	—	—	188	3	1.5	57.8	—	—
110	130	190	80	85.8	96	1.5	1.1	183 000	550 000	1 000	1 500	**52226 X**	**54226 X**	**54226 XU**	189.5	133	160	195	49	51.9	57	18	17	63	140	160	1.5	1	7.43	8.24	10.2
	130	225	130	—	—	2.1	1.1	350 000	1 030 000	710	1 100	**52326 X**	—	—	224	134	—	—	80	—	—	30	—	—	—	169	2	1	21.5	—	—
	140	280	196	—	—	4	1.5	550 000	1 750 000	500	750	**52428 X**	—	—	279	144	—	—	120	—	—	44	—	—	—	198	3	1.5	62.4	—	—
120	140	200	81	86.2	99	1.5	1.1	186 000	575 000	1 000	1 500	**52228 X**	**54228 X**	**54228 XU**	199.5	143	170	210	49.5	52.1	58.5	18	17	83.5	160	170	1.5	1	8.01	8.87	11.2
	140	240	140	—	—	2.1	1.1	370 000	1 130 000	670	1 000	**52328 X**	—	—	239	144	—	—	85.5	—	—	31	—	—	—	181	2	1	24.8	—	—
	150	300	209	—	—	4	2	620 000	2 010 000	480	710	**52430 X**	—	—	299	153	—	—	127.5	—	—	46	—	—	—	212	3	2	77.8	—	—
130	150	215	89	95.6	109	1.5	1.1	238 000	735 000	900	1 300	**52230 X**	**54230 X**	**54230 XU**	214.5	153	180	225	54.5	57.8	64.5	20	20.5	74.5	160	180	1.5	1	10.4	11.5	15
	150	250	140	—	—	2.1	1.1	380 000	1 200 000	630	950	**52330 X**	—	—	249	154	—	—	85.5	—	—	31	—	—	—	191	2	1	30.3	—	—
	160	320	226	—	—	5	2	650 000	2 210 000	430	630	**52432 X**	—	—	319	164	—	—	138	—	—	50	—	—	—	226	4	2	93.6	—	—


Note (1) The outside diameter d_3 of central washers for bearing designations with an X is smaller than the outside diameter D of the housing washers.

■DOUBLE-DIRECTION THRUST BALL BEARINGS


Bore Diameter 135 – 190 mm




With Flat Seat





With Aligning Seat



With Aligning Seat Washer








Boundary Dimensions (mm)								Basic Load Ratings (N)		Limiting Speeds (min^{-1})		Bearing Designations[1]		Dimensions (mm)										Abutment and Fillet Dimensions (mm)			Mass (kg) approx.		
d_2	d	D	T_1	T_5	T_7	r min.	r_1 min.	C_a	C_{0a}	Grease	Oil	With Flat Seat	With Aligning Seat	With Aligning Seat Washer	d_3	D_1	D_2	D_3	T_2	T_6	T_8	B	b	A_1	R	D_a max.	r_a max.	r_b max.	With Flat Seat	With Aligning Seat	With Aligning Seat Washer
135	170	340	236	—	—	5	2.1	715 000	2 480 000	400	600	**52434 X**	—	—	339	174	—	—	143	—	—	50	—	—	—	240	4	2	110	—	—
140	160	225	90	97.4	110	1.5	1.1	249 000	805 000	850	1 300	**52232 X**	**54232 X**	**54232 XU**	224.5	163	190	235	55	58.7	65	20	21	70	160	190	1.5	1	11.2	12.7	16.5
	160	270	153	—	—	3	1.1	475 000	1 570 000	600	900	**52332 X**	—	—	269	164	—	—	93	—	—	33	—	—	—	205	2.5	1	35.1	—	—
	180	360	245	—	—	5	3	750 000	2 730 000	380	560	**52436 X**	—	—	359	184	—	—	148.5	—	—	52	—	—	—	254	4	2.5	126	—	—
150	170	240	97	104.4	117	1.5	1.1	280 000	915 000	800	1 200	**52234 X**	**54234 X**	**54234 XU**	239.5	173	200	250	59	62.7	69	21	21.5	87	180	200	1.5	1	13.6	15.2	19.8
	170	280	153	—	—	3	1.1	465 000	1 570 000	560	850	**52334 X**	—	—	279	174	—	—	93	—	—	33	—	—	—	215	2.5	1	40.8	—	—
	180	250	98	102.4	118	1.5	2	284 000	955 000	800	1 200	**52236 X**	**54236 X**	**54236 XU**	249	183	210	260	59.5	61.7	69.5	21	21.5	108.5	200	210	1.5	2	14.8	16.1	20.6
	180	300	165	—	—	3	2	480 000	1 680 000	530	800	**52336 X**	—	—	299	184	—	—	101	—	—	37	—	—	—	229	2.5	2.5	46.3	—	—
160	190	270	109	116.4	131	2	2	320 000	1 110 000	710	1 100	**52238 X**	**54238 X**	**54238 XU**	269	194	230	280	66.5	70.2	77.5	24	23	93.5	200	230	2	2	22.1	22.2	29.8
	190	320	183	—	—	4	2	550 000	1 960 000	480	710	**52338 X**	—	—	319	195	—	—	111.5	—	—	40	—	—	—	244	3	2	113	—	—
170	200	280	109	115.6	133	2	2	315 000	1 110 000	710	1 000	**52240 X**	**54240 X**	**54240 XU**	279	204	240	290	66.5	69.8	78.5	24	23	120.5	225	240	2	2	23.1	23.2	30.6
	200	340	192	—	—	4	2	600 000	2 220 000	450	670	**52340 X**	—	—	339	205	—	—	117	—	—	42	—	—	—	258	3	2	78.4	—	—
190	220	300	110	115.2	134	2	2	325 000	1 210 000	670	1 000	**52244 X**	**54244 X**	**54244 XU**	299	224	260	310	67	69.6	79	24	25	114	225	260	2	2	25.2	27.8	34.1

Note (1) The outside diameter d_3 of central washers for bearing designations with an X is smaller than the outside diameter D of the housing washers.

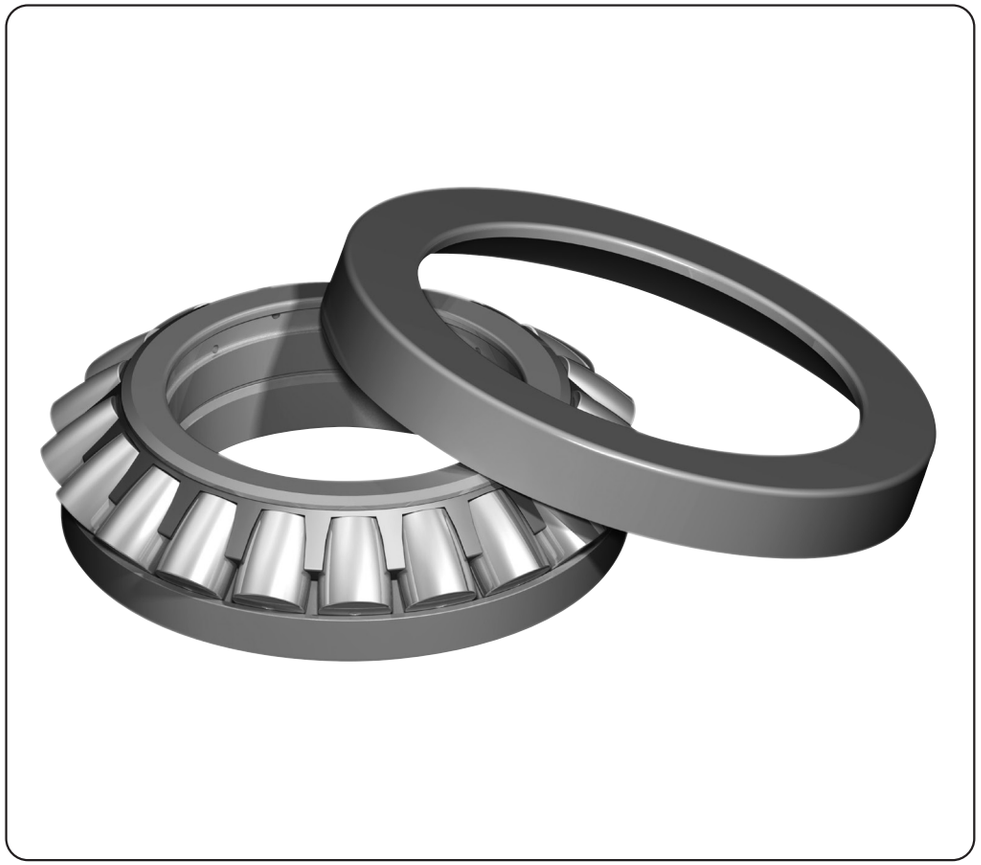

11. THRUST SPHERICAL ROLLER BEARINGS

INTRODUCTION ..... C 332

BEARING TABLES

THRUST SPHERICAL ROLLER BEARINGS

Bore Diameter 60mm – 500mm ..... C 334

DESIGN, TYPES, AND FEATURES

THRUST SPHERICAL ROLLER BEARINGS

These thrust bearings containing convex rollers have self-aligning capabilities and are free of any influence from mounting error or shaft deflection. E-type bearings (suffixed with E in the bearing tables) with pressed cages are available for high load applications.

Machined-brass cages are recommended for horizontal shafts or high-speed applications; please contact NSK for details.

Since there are several places where lubrication is difficult, such as the area between the roller heads and inner ring rib, the sliding surfaces between cage and guide sleeve, etc., oil lubrication should be used, even at low speeds.

Machined-brass cages are used in standard bearings of this type.

TOLERANCES AND RUNNING ACCURACY

THRUST SPHERICAL ROLLER BEARINGS ..... Table 7.8 (Pages A145)

RECOMMENDED FITS

THRUST SPHERICAL ROLLER BEARINGS ..... Table 8.4 (Pages A164)
Table 8.6 (Pages A165)

DIMENSIONS RELATED TO MOUNTING

Dimensions related to mounting of thrust spherical roller bearings are listed in the bearing tables.

If the bearing load is heavy, design the shaft shoulder with ample strength to provide sufficient support for the shaft washer.

PERMISSIBLE MISALIGNMENT


The permissible misalignment of thrust spherical roller bearings varies depending on size, but it is approximately 0.018 to 0.036 radian (1° to 2°) with average loads.


MINIMUM AXIAL LOAD


Be sure to apply some axial load to thrust bearings to prevent slippage between the rolling elements and raceways. For more details, please refer to Page A198.


THRUST SPHERICAL ROLLER BEARINGS

Bore Diameter 60 – 200 mm









Dynamic Equivalent Load

$P = 1.2F_r + F_a$

Static Equivalent Load

$P_0 = 2.8F_r + F_a$


However, $F_r/F_a \leqq 0.55$ must be satisfied.


Boundary Dimensions (mm)				Basic Load Ratings (N)		Limiting Speeds (min^{-1}) Oil	Bearing Designation	Dimensions (mm)						Spacer Sleeve Dimensions (mm)		Abutment and Fillet Dimensions (mm)				Mass (kg)
d	D	T	r min.	C_a	C_{0a}			d_1	D_1	B, B_1	B_2	C	A	d_{S1} max.	d_{S2} max.	d_a(1) min.	D_a max.	D_b min.	r_a max.	approx.
60	130	42	1.5	330 000	885 000	2 600	**29412 E**	114.5	89	27	38	20	38	67	67	90	108	133	1.5	2.55
65	140	45	2	405 000	1 100 000	2 400	**29413 E**	121.5	93	29.5	40.5	22	42	72	72	100	115	143	2	3.2
70	150	48	2	450 000	1 240 000	2 400	**29414 E**	131.5	102	31	43	24	44	78	78	105	125	153	2	3.9
75	160	51	2	515 000	1 430 000	2 200	**29415 E**	138	107	33.5	46	25	47	83	83	115	132	163	2	4.65
80	170	54	2.1	575 000	1 600 000	2 000	**29416 E**	148	114.5	35	48.5	27	50	89	89	120	140	173	2	5.55
85	150	39	1.5	330 000	1 040 000	2 400	**29317 E**	134.5	112	24.5	35.5	19	50	91	91	115	135	153	1.5	2.7
	180	58	2.1	630 000	1 760 000	1 900	**29417 E**	156.5	124	37	51.5	28	54	95	95	130	150	183	2	6.55
90	155	39	1.5	350 000	1 080 000	2 200	**29318 E**	139.5	118	24.5	35	19	52	97	97	120	140	158	1.5	2.83
	190	60	2.1	695 000	1 950 000	1 800	**29418 E**	165.5	129.5	39	54.5	29	56	100	100	135	157	193	2	7.55
100	170	42	1.5	410 000	1 280 000	2 000	**29320 E**	152	128	26.2	38	20.8	58	107	107	130	150	173	1.5	3.6
	210	67	3	840 000	2 400 000	1 600	**29420 E**	185	144	43	59.5	33	62	111	111	150	175	214	2.5	10.3
110	190	48	2	530 000	1 710 000	1 800	**29322 E**	169.5	142.5	30.3	43.5	24	64	117	117	145	165	193	2	5.25
	230	73	3	1 010 000	2 930 000	1 500	**29422 E**	200	157	47	64.5	36	69	121	129	165	190	234	2.5	13.3
120	210	54	2.1	645 000	2 100 000	1 600	**29324 E**	187.5	156.5	34	48.5	27	70	130	130	160	180	214	2	7.3
	250	78	4	1 160 000	3 400 000	1 400	**29424 E**	215	171	50.5	69.5	38	74	132	142	180	205	254	3	16.6
130	225	58	2.1	740 000	2 450 000	1 500	**29326 E**	203.5	168.5	37	53.5	28	76	141	143	170	195	229	2	8.95
	270	85	4	1 330 000	3 900 000	1 200	**29426 E**	235	185	54	74.5	42	81	143	153	195	225	275	3	21.1
140	240	60	2.1	840 000	2 810 000	1 400	**29328 E**	216.5	179	38.5	54	30	82	148	154	185	205	244	2	10.4
	280	85	4	1 370 000	4 200 000	1 200	**29428 E**	244.5	195.5	54	74.5	42	86	153	162	205	235	285	3	22.2
150	250	60	2.1	870 000	2 900 000	1 400	**29330 E**	224	190	38	54.5	29	87	158	163	195	215	254	2	10.8
	300	90	4	1 580 000	4 900 000	1 100	**29430 E**	266	209	58	81	44	92	164	175	220	250	306	3	27.3
160	270	67	3	1 010 000	3 400 000	1 300	**29332 E**	243	203	42	60	33	92	169	176	210	235	275	2.5	14.3
	320	95	5	1 740 000	5 400 000	1 100	**29432 E**	278	224.5	60.5	84.5	46	99	175	189	230	265	326	4	32.1
170	280	67	3	1 050 000	3 500 000	1 200	**29334 E**	252	214.5	42.2	60.5	32	96	178	188	220	245	285	2.5	14.8
	340	103	5	1 680 000	5 800 000	1 000	**29434**	310	243	37	99	50	104	—	—	245	285	—	4	43.5
180	300	73	3	1 230 000	4 200 000	1 100	**29336 E**	270	227	46	65.5	36	103	189	195	235	260	306	2.5	19
	360	109	5	1 870 000	6 500 000	900	**29436**	330	255	39	105	52	110	—	—	260	300	—	4	52
190	320	78	4	1 370 000	4 700 000	1 100	**29338 E**	288.5	244	49	69	38	110	200	211	250	275	326	3	23
	380	115	5	2 100 000	7 450 000	850	**29438**	345	271	41	111	55	117	—	—	275	320	—	4	60
200	280	48	2	540 000	2 310 000	1 500	**29240**	266	236	15	46	24	108	—	—	235	255	—	2	8.55
	340	85	4	1 570 000	5 450 000	1 000	**29340 E**	306.5	257	53.5	75	41	116	211	224	265	295	346	3	28.5
	400	122	5	2 290 000	8 150 000	800	**29440**	365	280	43	117	59	122	—	—	290	335	—	4	69

Note (1) For heavy load applications, ensure that the d_a value chosen is large enough to support the shaft washer rib.

THRUST SPHERICAL ROLLER BEARINGS

Bore Diameter 220 – 420 mm





Dynamic Equivalent Load

$P = 1.2F_r + F_a$

Static Equivalent Load

$P_0 = 2.8F_r + F_a$


However, $F_r/F_a \leqq 0.55$ must be satisfied.


Boundary Dimensions (mm)				Basic Load Ratings (N)		Limiting Speeds (min^{-1}) Oil	Bearing Designation	Dimensions (mm)						Abutment and Fillet Dimensions (mm)			Mass (kg)
d	D	T	r min.	C_a	C_{0a}			d_1	D_1	B_1	B_2	C	A	d_a(1) min.	D_a max.	r_a max.	approx.
220	300	48	2	560 000	2 500 000	1 400	**29244**	285	254	15	46	24	117	260	275	2	9.2
	360	85	4	1 340 000	5 200 000	950	**29344**	335	280	29	81	41	125	285	315	3	33
	420	122	6	2 350 000	8 650 000	800	**29444**	385	308	43	117	58	132	310	355	5	74
240	340	60	2.1	800 000	3 450 000	1 200	**29248**	325	283	19	57	30	130	285	305	2	16.5
	380	85	4	1 360 000	5 400 000	950	**29348**	355	300	29	81	41	135	300	330	3	35.5
	440	122	6	2 420 000	9 100 000	750	**29448**	405	326	43	117	59	142	330	375	5	79
260	360	60	2.1	855 000	3 850 000	1 200	**29252**	345	302	19	57	30	139	305	325	2	18
	420	95	5	1 700 000	6 800 000	800	**29352**	390	329	32	91	45	148	330	365	4	48.5
	480	132	6	2 820 000	10 700 000	710	**29452**	445	357	48	127	64	154	360	405	5	105
280	380	60	2.1	885 000	4 100 000	1 100	**29256**	365	323	19	57	30	150	325	345	2	19
	440	95	5	1 830 000	7 650 000	800	**29356**	410	348	32	91	46	158	350	390	4	52.5
	520	145	6	3 400 000	13 100 000	630	**29456**	480	384	52	140	68	166	390	440	5	132
	520	145	6	3 950 000	14 900 000	630	**29456 EM**	480	380	52	140	70	166	410	445	5	134
300	420	73	3	1 160 000	5 150 000	950	**29260**	400	353	21	69	38	162	355	380	2.5	30
	480	109	5	2 190 000	9 100 000	710	**29360**	450	379	37	105	50	168	380	420	4	74
	540	145	6	3 500 000	13 700 000	630	**29460**	500	402	52	140	70	175	410	460	5	140
320	440	73	3	1 190 000	5 450 000	950	**29264**	420	372	21	69	38	172	375	400	2.5	32.5
	500	109	5	2 230 000	9 400 000	670	**29364**	470	399	37	105	53	180	400	440	4	77
	580	155	7.5	3 650 000	14 600 000	560	**29464**	555	436	55	149	75	191	435	495	6	175
340	460	73	3	1 230 000	5 750 000	900	**29268**	440	395	21	69	37	183	395	420	2.5	33.5
	540	122	5	2 640 000	11 200 000	630	**29368**	510	428	41	117	59	192	430	470	4	103
	620	170	7.5	4 400 000	17 400 000	530	**29468**	590	462	61	164	82	201	465	530	6	218
360	500	85	4	1 550 000	7 300 000	800	**29272**	480	423	25	81	44	194	420	455	3	51
	560	122	5	2 670 000	11 500 000	600	**29372**	525	448	41	117	59	202	450	495	4	107
	640	170	7.5	4 200 000	17 200 000	500	**29472**	610	480	61	164	82	210	485	550	6	228
	640	170	7.5	5 450 000	20 400 000	500	**29472 EM**	580	474	61	164	83	210	495	550	6	220
380	520	85	4	1 620 000	7 800 000	800	**29276**	496	441	27	81	42	202	440	475	3	52
	600	132	6	3 300 000	14 500 000	560	**29376**	568	477	44	127	63	216	480	525	5	140
	670	175	7.5	4 800 000	19 500 000	480	**29476**	640	504	63	168	85	230	510	575	6	254
400	540	85	4	1 640 000	8 000 000	750	**29280**	517	460	27	81	42	212	460	490	3	55
	620	132	6	3 250 000	14 500 000	530	**29380**	590	494	44	127	64	225	500	550	5	150
	710	185	7.5	5 400 000	22 100 000	450	**29480**	680	536	67	178	89	236	540	610	6	306
420	580	95	5	2 010 000	9 800 000	670	**29284**	553	489	30	91	46	225	490	525	4	72
	650	140	6	3 500 000	15 700 000	500	**29384**	620	520	48	135	68	235	525	575	5	170
	730	185	7.5	5 650 000	23 500 000	450	**29484**	700	556	67	178	89	244	560	630	6	323

Note (1) For heavy load applications, ensure that the d_a value chosen is large enough to support the shaft washer rib.

THRUST SPHERICAL ROLLER BEARINGS

Bore Diameter 440 – 500 mm





Dynamic Equivalent Load

$P = 1.2F_r + F_a$

Static Equivalent Load

$P_0 = 2.8F_r + F_a$

However, $F_r/F_a \leqq 0.55$ must be satisfied.

Boundary Dimensions (mm)				Basic Load Ratings (N)		Limiting Speeds (min^{-1}) Oil	Bearing Designation	Dimensions (mm)						Abutment and Fillet Dimensions (mm)			Mass (kg)
d	D	T	r min.	C_a	C_{0a}			d_1	D_1	B_1	B_2	C	A	d_a(1) min.	D_a max.	r_a max.	approx.
440	600	95	5	2 030 000	10 100 000	670	**29288**	575	508	30	91	49	235	510	545	4	77
	680	145	6	3 750 000	16 700 000	480	**29388**	645	548	49	140	70	245	550	600	5	190
	780	206	9.5	6 550 000	27 200 000	400	**29488**	745	588	74	199	100	260	595	670	8	407
	780	206	9.5	8 000 000	31 500 000	400	**29488 EM**	710	577	74	199	101	257	605	675	8	402
460	620	95	5	2 060 000	10 300 000	670	**29292**	592	530	30	91	46	245	530	570	4	80
	710	150	6	4 100 000	18 400 000	450	**29392**	666	567	51	144	72	257	575	630	5	210
	800	206	9.5	6 750 000	28 600 000	380	**29492**	765	608	74	199	100	272	615	690	8	420
480	650	103	5	2 370 000	12 100 000	600	**29296**	624	556	33	99	55	259	555	595	4	97
	730	150	6	4 150 000	19 000 000	450	**29396**	690	590	51	144	72	270	595	650	5	215
	850	224	9.5	7 200 000	31 000 000	360	**29496**	810	638	81	216	108	280	645	730	8	545
500	670	103	5	2 390 000	12 400 000	600	**292/500**	645	574	33	99	55	268	575	615	4	100
	750	150	6	4 350 000	20 400 000	450	**293/500**	715	611	51	144	74	280	615	670	5	220
	870	224	9.5	7 850 000	33 000 000	340	**294/500**	830	661	81	216	107	290	670	750	8	560

Note (1) For heavy load applications, ensure that the d_a value chosen is large enough to support the shaft washer rib.