

320 X Lagerreihe 320 X / Series 320 X



Lager / Bearing	d	D	C
32004 X	20	42	12
320/22 X	22	44	11,5
32005 X	25	47	11,5
320/28 X	28	52	12
32006 X	30	55	13
320/32 X	32	58	13
32007 X	35	62	14
32008 X	40	68	14,5
32009 X	45	75	15,5
32010 X	50	80	15,5
32011 X	55	90	17,5
32012 X	60	95	17,5
32013 X	65	100	17,5
32014 X	70	110	19
32015 X	75	115	19
32016 X	80	125	22
32017 X	85	130	22
32018 X	90	140	24
32019 X	95	145	24
32020 X	100	150	24
32021 X	105	160	26
32022 X	110	170	29
32024 X	120	180	29
32026 X	130	200	34
32028 X	140	210	34
32030 X	150	225	36
32032 X	160	240	38
32034 X	170	260	43
32036 X	180	280	48
32038 X	190	290	48
32040 X	200	310	53
32044 X	220	340	57
32048 X	240	360	57

AV




NILOS-RING	a	c	d	s	v
32004 X AV	40,5	33	20	0,3	3,2
320/22 XAV	43	36	22	0,3	3,7
32005 X AV	46	39	25	0,3	3,7
320/28 X AV	51	42	28	0,3	4,2
32006 X AV	53,8	44	30	0,3	4,2
320/32 XAV	56,5	47	32	0,3	4,2
32007 X AV	60	53	35	0,3	4,2
32008 X AV	66,5	56	40	0,3	4,7
32009 X AV	73,5	63	45	0,3	4,7
32010 X AV	78,6	68	50	0,3	4,7
32011 X AV	88,4	76	55	0,3	5,7
32012 X AV	93,2	80	60	0,3	5,7
32013 X AV	98,4	86	65	0,3	5,7
32014 X AV	107,5	92	70	0,3	6,2
32015 X AV	113	98	75	0,5	6,2
32016 X AV	122,5	105	80	0,5	7,2
32017 X AV	128	110	85	0,5	7,2
32018 X AV	137	116	90	0,5	8,2
32019 X AV	142	122	95	0,5	8,2
32020 X AV	147	127	100	0,5	8,2
32021 X AV	156	133	105	0,5	9,2
32022 X AV	165,5	142	110	0,5	9,2
32024 X AV	174,5	152	120	0,5	9,2
32026 X AV	195	175	130	0,5	11,3
32028 X AV	206	180	140	0,5	11,3
32030 X AV	220	198	150	0,5	12,2
32032 X AV	235	208	160	0,5	13,3
32034 X AV	255	235	170	0,5	14,8
32036 X AV	274	235	180	0,5	16,5
32038X AV	280	255	190	0,5	16,8
32040X AV	300	260	200	0,5	17,9
32044X AV	330	290	220	0,5	19,9
32048X AV	350	310	240	0,7	19,9

JV




NILOS-RING	i	c	D	h	s
32004 JV	23,2	34	42	2	0,3
320/22 JV	24,7	37	44	2	0,3
32005 JV	28,1	38	47	2,5	0,3
320/28 JV	31,5	42	52	2,5	0,3
32006 JV	32,2	47	55	2,5	0,3
320/32 JV	35	48	58	2,5	0,3
32007 JV	37	51	62	2,5	0,3
32008 JV	43	58	68	3	0,3
32009 JV	48	64	75	3	0,3
32010 JV	53	68	80	3	0,3
32011 JV	60	80	90	3	0,3
32012 JV	63	82	95	3	0,3
32013 JV	70	88	100	3	0,3
32014 JV	74,5	95	110	3	0,3
32015 JV	79,5	102	115	3,5	0,3
32016 JV	85	112	125	3,5	0,5
32017 JV	90	114	130	3,5	0,5
32018 JV	95	122	140	3,5	0,5
32019 JV	97,8	130	145	3,5	0,5
32020 JV	105	132	150	4	0,5
32021 JV	110	140	160	4	0,5
32022 JV	116	148	170	4	0,5
32024 JV	125,5	165	180	4	0,5
32026 JV	134	175	200	4	0,5
32028 JV	144	190	210	4	0,5
32030 JV	155	200	225	4	0,5
32032 JV	172	220	240	4	0,5
32036 JV	190	240	280	5	0,5
32040 JV	205	265	310	5	0,5

Lagerreihe 320 X / Series 320 X 320 X



Lager / Bearing	d	D	C
32004X	20	42	12
32005X	25	47	11,5
32006X	30	55	13
32007X	35	62	14
32008X	40	68	14,5
32009X	45	75	15,5
32010X	50	80	15,5
32011X	55	90	17,5
32012X	60	95	17,5
32013X	65	100	17,5
32014X	70	110	19
32015X	75	115	19
32016X	80	125	22
32017X	85	130	22
32018X	90	140	24
32019X	95	145	24
32020X	100	150	24
32021X	105	160	26
32022X	110	170	29
32024X	120	180	29
32026X	130	200	34
32028X	140	210	34
32030X	150	225	36
32032X	160	240	38

AK




NILOS-RING	a_1	a_2	c	d	w*	h	s_1	s_2	G	g	t
32004 XAK	40,5	45	30	20	25	3	0,3	0,5	46	42	15,4
32005 XAK	46	50	36	25	31	3	0,3	0,5	51	47	15,4
32006 XAK	53,8	58	43	30	37	3	0,3	0,5	59	55	17,4
32007 XAK	60	65	47	35	41	3	0,3	0,5	66	62	18,4
32008 XAK	66,5	71	54	40	47	4	0,3	0,5	72	68	19,4
32009 XAK	73,5	78	63	45	54	4	0,3	0,5	79	75	20,4
32010 XAK	78,6	83	64	50	57	4	0,3	0,5	84	80	20,4
32011 XAK	88,4	93	71	55	63	4	0,3	0,5	94	90	23,4
32012 XAK	93,2	98	80	60	70	4,5	0,3	0,5	99	95	23,4
32013 XAK	98,4	103	82	65	73	4,5	0,3	0,5	105	100	23,4
32014 XAK	107,5	113	91	70	80	4,5	0,3	0,5	115	110	25,4
32015 XAK	113	118	98	75	86	4,5	0,5	0,5	120	115	25,6
32016 XAK	122,5	128	103	80	91	5	0,5	0,5	130	125	29,6
32017 XAK	128	133	108	85	96	5	0,5	0,5	135	130	29,6
32018 XAK	137	143	115	90	102	5	0,5	0,5	145	140	32,6
32019 XAK	142	148	120	95	107	5	0,5	0,5	150	145	32,6
32020 XAK	147	153	124	100	112	5	0,5	0,5	155	150	32,6
32021 XAK	156	164	135	105	118	5	0,5	0,5	166	160	35,6
32022 XAK	165,5	174	139	110	124	5	0,5	0,5	176	170	38,6
32024 XAK	174,5	184	150	120	134	5	0,5	0,5	186	180	38,6
32026 XAK	195	214	173	130	150	5	0,5	0,5	217	200	45,7
32028 XAK	206	219	179	140	160	5	0,5	0,5	222	210	45,7
32030 XAK	220	239	190	150	170	5	0,5	0,5	242	225	48,7
32032 XAK	235	248	200	160	180	5	0,5	0,5	251	240	51,7




*Bitte beachten: Die Festhaltewarzen des NILOS-RINGES AK haben einen Durchmesser am Grund von 4 mm und eine Höhe von 1,5 mm.
*Please note: Locking nipples of NILOS-RINGS AK have a diameter of 4 mm at the bottom and a height of 1,5 mm.


302 Lagerreihe 302 / Series 302



AV



JV




Lager / Bearing	d	D	C
30202	15	35	10
30203	17	40	11
30204	20	47	12
30205	25	52	13
30206	30	62	14
30207	35	72	15
30208	40	80	16
30209	45	85	16
30210	50	90	17
30211	55	100	18
30212	60	110	19
30213	65	120	20
30214	70	125	21
30215	75	130	22
30216	80	140	22
30217	85	150	24
30218	90	160	26
30219	95	170	27
30220	100	180	29
30221	105	190	30
30222	110	200	32
30224	120	215	34
30226	130	230	34
30228	140	250	36
30230	150	270	38
30232	160	290	40
30234	170	310	43
30236	180	320	43


NILOS-RING	a	c	d	s	v
30202 AV	34	27	15	0,3	2,1
30203 AV	38	30	17	0,3	2,6
30204 AV	45	36	20	0,3	3,6
30205 AV	49	40	25	0,3	3,6
30206 AV	60	47	30	0,3	3,6
30207 AV	69,5	55	35	0,3	3,6
30208 AV	77,5	61	40	0,3	4,1
30209 AV	82	67	45	0,3	5,1
30210 AV	87,5	71	50	0,3	5,1
30211 AV	97	78	55	0,3	5,1
30212 AV	106,5	93	60	0,5	5,1
30213 AV	116,5	98	65	0,5	5,1
30214 AV	121	98	70	0,5	5,6
30215 AV	127	104	75	0,5	5,6
30216 AV	136	110	80	0,5	6,6
30217 AV	146	124	85	0,5	7,1
32018	156	125	90	0,5	7,1
30219 AV	165	133	95	0,5	8,1
30220 AV	175	140	100	0,5	8,6
30221 AV	185	168	105	0,5	9,6
30222 AV	195	175	110	0,5	9,6
30224 AV	210	178	120	0,5	10,1
30226 AV	220	178	130	0,5	10,6
30228 AV	240	192	192	0,5	10,6
30230 AV	260	208	208	0,5	12,1
30232 AV	280	255	255	0,5	13,1
30234 AV	300	260	260	0,5	15,2
30236 AV	310	270	180	0,5	15,2


NILOS-RING	i	c	D	h	s	v
30202 JV	17,3	27	35	2	0,3	1
30203 JV	20,2	31	40	2	0,3	1,6
30204 JV	23,6	37	47	2	0,3	1,6
30205 JV	27,2	40	52	2	0,3	1,6
30206 JV	33	49	62	2,5	0,3	1,6
30207 JV	41,9	58	72	3	0,3	1,6
30208 JV	45	65	80	2,5	0,3	2,1
30209 JV	49,4	68	85	3	0,3	2,1
30210 JV	53	82	90	2,5	0,3	2,1
30211 JV	58	84	100	4,6	0,5	2,1
30212 JV	67	93	110	3	0,5	2,1
30213 JV	74,5	108	120	5	0,5	2,1
30214 JV	76,5	108	125	5	0,5	2,6
30215 JV	81	105	130	3,5	0,5	2,6
30216 JV	87,2	120	140	3,5	0,5	2,6
30217 JV	92,3	127	150	3,5	0,5	3,1
30218 JV	97,8	130	160	3,5	0,5	3,1
30219 JV	103	150	170	3,5	0,5	3,1
30220 JV	109,5	160	180	4	0,5	3,6
30221 JV	115	160	190	4	0,5	3,6
30222 JV	120	170	200	4	0,5	3,6
30224 JV	130	180	215	4	0,5	4,1
30226 JV	136	215	230	4	0,5	3,75
30228 JV	148	225	250	5	0,5	3,8

302 Lagerreihe 302 / Series 302



AK






Lager / Bearing	d	D	C
30203	17	40	11
30204	20	47	12
30205	25	52	13
30206	30	62	14
30207	35	72	15
30208	40	80	16
30209	45	85	16
30210	50	90	17
30211	55	100	18
30212	60	110	19
30213	65	120	20
30214	70	125	21
30215	75	130	22
30216	80	140	22
30217	85	150	24
30218	90	160	26
30219	95	170	27
30220	100	180	29
30221	105	190	30
30222	110	200	32
30224	120	215	34
30226	130	230	34
30228	140	250	36
30230	150	270	38
30234	170	310	43

NILOS-RING	a_1	a_2	c	d	w*	h	s_1	s_2	G	g	t
30203 AK	38	43	30	17	24	3	0,3	0,5	44	41	13,8
30204 AK	45	50	36	20	27	3	0,3	0,5	51	48	15,8
30205 AK	49	55	40	25	33	3	0,3	0,5	56	53	16,8
30206 AK	60	65	47	30	38	3	0,3	0,5	66	63	17,5
30207 AK	69,5	75	55	35	45	4	0,3	0,5	76	73	18,8
30208 AK	77,5	83	61	40	50	4	0,3	0,5	84	81	20,3
30209 AK	82	88	67	45	55	4	0,3	0,5	89	86	21,3
30210 AK	87,5	93	71	50	60	4	0,3	0,5	94	91	22,3
30211 AK	97	103	78	55	68	4,5	0,3	0,5	104	101	23,3
30212 AK	106,5	113	85	60	73	4,5	0,5	0,5	114	111	24,5
30213 AK	116,5	123	93	65	78	4,5	0,5	0,5	124	121	25,5
30214 AK	121	128	98	70	83	5	0,5	0,5	129	126	27
30215 AK	127	133	104	75	88	5	0,5	0,5	134	131	28
30216 AK	136	143	110	80	95	5	0,5	0,5	144	141	29
30217 AK	146	153	117	85	100	5	0,5	0,5	154	151	31,5
30218 AK	156	163	125	90	105	5	0,5	0,5	164	161	33,5
30219 AK	165	173	113	95	115	5	0,5	0,5	174	171	35,5
30220 AK	175	183	140	100	120	5	0,5	0,5	184	181	38
30221 AK	185	193	148	105	125	5	0,5	0,5	194	191	40
30222 AK	195	203	156	110	135	5	0,5	0,5	204	201	42
30224 AK	210	218	165	120	145	5	0,5	0,5	219	216	44,5
30226 AK	220	233	178	130	160	5	0,5	0,5	234	231	45
30228 AK	240	253	192	140	170	5	0,5	0,5	254	251	47
30230 AK	260	273	208	150	180	5	0,5	0,5	274	271	50,5
30234 AK	300	314	260	170	205	5	0,5	0,5	315	311	58,6


*Bitte beachten: Die Festhaltewarzen des NILOS-RINGES AK haben einen Durchmesser am Grund von 4 mm und eine Höhe von 1,5 mm.
*Please note: Locking nipples of NILOS-RINGS AK have a diameter of 4 mm at the bottom and a height of 1,5 mm.

330

Lagerreihe 330 / Series 330



AV



JV




Lager / Bearing	d	D	C
33005	25	47	14
33006	30	55	16
33007	35	62	17
33008	40	68	18
33009	45	75	19
33010	50	80	19
33011	55	90	21
33012	60	95	21
33013	65	100	21
330014	70	110	25,5
33015	75	115	25,5
33016	80	125	29,5
33017	85	130	29,5
33018	90	140	32,5
33019	95	145	32,5
33020	100	150	32,5
33021	105	160	34
33022	110	170	37
33024	120	180	38
33026	130	200	43
33028	140	210	44
33030	150	225	46

NILOS-RING	a	c	d	s	v
33005 AV	46	9	25	0,3	3,5
33006 AV	58,8	44	30	0,3	4,2
33007 AV	60	53	35	0,3	4,2
33008 AV	66,5	56	40	0,3	4,5
33009 AV	73,5	63	45	0,3	5,5
33010 AV	78,6	68	50	0,3	5,2
33011 AV	88,4	76	55	0,3	6,5
33012 AV	93,2	80	60	0,3	6,5
33013 AV	98,4	86	65	0,3	6,2
33014 AV	107,5	92	70	0,3	5,7
33015 AV	113	98	75	0,5	5,7
33016 AV	122,5	105	80	0,5	7
33017 AV	128	110	85	0,5	7
33018 AV	137	116	90	0,5	6,7
33019 AV	142	122	95	0,5	6,7
33020 AV	147	127	100	0,5	6,7
33021 AV	156	133	105	0,5	9,2
33022 AV	165,5	42	110	0,5	10,2
33024 AV	174,5	152	120	0,5	10,2
33026 AV	195	175	130	0,5	12,5
33028 AV	206	180	140	0,5	12,5
33030 AV	220	198	150	0,5	13,5


NILOS-RING	i	c	D	h	s
33005 JV	28,1	38	47	2,5	0,3
33006 JV	32,2	47	55	2,5	0,3
33007 JV	37	51	62	2,5	0,3
33008 JV	43	58	68	3	0,3
33009 JV	48	64	75	3	0,3
33010 JV	53	68	80	3	0,3
33011 JV	60	80	90	3	0,3
33012 JV	63	82	95	3	0,3
33013 JV	70	88	100	3,5	0,3
33014 JV	74,5	95	110	3,5	0,3
33015 JV	79,5	102	115	3,5	0,3
33016 JV	85	112	125	3,5	0,5
33017 JV	90	114	130	3,5	0,5
33018 JV	95	122	140	3,5	0,5
33019 JV	97,8	130	145	4	0,5
33020 JV	105	132	150	4	0,5
33021 JV	110	140	160	4	0,5
33022 JV	116	148	170	4	0,5
33024 JV	125,5	165	180	4	0,5
33026 JV	134	175	200	4	0,5
33028 JV	144	190	210	4	0,5


330

Lagerreihe 330 / Series 330



AK






Lager / Bearing	d	D	C
33005	25	47	14
33006	30	55	16
33007	35	62	17
33008	40	68	18
33009	45	75	19
33010	50	80	19
33011	55	90	21
33012	60	95	21
33013	65	100	21
33014	70	110	25,5
33015	75	115	25,5
33016	80	125	29,5
33017	85	130	29,5
33018	90	140	32,5
33019	95	145	32,5
33020	100	150	32,5
33021	105	160	34
33022	110	170	37
33024	120	180	38
33026	130	200	43
33028	140	210	44
33030	150	225	46


NILOS-RING	a_1	a_2	c	d	w*	h	s_1	s_2	G	g	t
33005 AK	46	50	36	25	31	3	0,3	0,5	51	47	17,4
33006 AK	53,8	58	43	30	37	3	0,3	0,5	59	55	20,4
33007 AK	60	65	47	35	41	3	0,3	0,5	66	62	21,4
33008 AK	66,5	71	54	40	47	4	0,3	0,5	72	68	22,4
33009 AK	73,5	78	63	45	54	4	0,3	0,5	79	75	24,4
33010 AK	78,6	83	64	50	57	4	0,3	0,5	84	80	24,4
33011 AK	88,4	93	71	55	63	4	0,3	0,5	94	90	27,4
33012 AK	93,2	98	80	60	70	4,5	0,3	0,5	99	95	27,4
33013 AK	98,4	103	82	65	73	4,5	0,3	0,5	105	100	27,4
33014 AK	107,5	113	91	70	80	4,5	0,3	0,5	115	110	31,4
33015 AK	113	118	98	75	86	4,5	0,5	0,5	120	115	31,6
33016 AK	122,5	128	103	80	91	5	0,5	0,5	130	125	36,6
33017 AK	128	133	108	85	96	5	0,5	0,5	135	130	36,6
33018 AK	137	143	115	90	102	5	0,5	0,5	145	140	39,6
33019 AK	142	148	120	95	107	5	0,5	0,5	150	145	39,6
33020 AK	147	153	124	100	112	5	0,5	0,5	155	150	39,6
33021 AK	156	164	135	105	118	5	0,5	0,5	166	160	43,6
33022 AK	165,5	174	139	110	124	5	0,5	0,5	176	170	47,6
33024 AK	174,5	184	150	120	134	5	0,5	0,5	186	180	48,6
33026 AK	195	214	173	130	150	5	0,5	0,5	217	200	55,7
33028 AK	206	219	179	140	160	5	0,5	0,5	222	210	56,7
33030 AK	220	239	190	150	170	5	0,5	0,5	242	225	59,7

322


Lagerreihe 322 / Series 322



AV



JV




Lager / Bearing	d	D	C
32203	17	40	14
32204	20	47	15
32205	25	52	16
32206	30	62	17
32207	35	72	19
32208	40	80	19
32209	45	85	19
32210	50	90	19
32211	55	100	21
32212	60	110	24
32213	65	120	27
32214	70	125	27
32215	75	130	27
32216	80	140	28
32217	85	150	30
32218	90	160	34
32219	95	170	37
32220	100	180	39
32221	105	190	43
32222	110	200	46
32224	120	215	50
32226	130	230	54
32228	140	250	58
32230	150	270	60
32232	160	290	67
32236	180	320	71
32238	190	340	75
32240	200	360	82

NILOS-RING	a	c	d	s	v
32203 AV	38	30	17	0,3	3,6
32204 AV	45	36	20	0,3	4,6
32205 AV	49	40	25	0,3	4,6
32206 AV	60	47	30	0,3	4,6
32207 AV	69,5	55	35	0,3	5,6
32208 AV	77,5	61	40	0,3	6,1
32209 AV	82	67	45	0,3	6,1
32210 AV	87,5	71	50	0,3	6,1
32211 AV	97	78	55	0,3	6,1
32212 AV	106,5	93	60	0,5	6,1
32213 AV	116,5	98	65	0,5	6,1
32214 AV	121	98	70	0,5	6,6
32215 AV	127	104	75	0,5	6,6
32216 AV	136	110	80	0,5	7,6
32217 AV	146	124	85	0,5	9,1
32218 AV	156	125	90	0,5	9,1
32219 AV	165	133	95	0,5	9,1
32220 AV	175	140	100	0,5	10,6
32221 AV	185	168	105	0,5	10,6
32222 AV	195	175	110	0,5	10,6
32224 AV	210	178	120	0,5	12,1
32226 AV	220	178	130	0,5	14,6
32228 AV	240	192	140	0,5	14,6
32230 AV	260	208	150	0, 5	17,8
32232 AV	280	255	1600	0,5	29,1
32236 AV	310	270	180	0,5	21
32238 AV	330	290	190	0,5	23
32240 AV	350	310	200	0,7	22,6


NILOS-RING	i	c	D	h	s	v
32205 JV	27,2	40	52	2	0,3	1,6
32206 JV	33	49	62	2,5	0,3	1,6
32207 JV	41,9	56	72	3	0,3	1,6
32208 JV	45	65	80	2,5	0,3	2,1
32209 JV	49,4	68	85	3	0,3	2,1
32210 JV	53	82	90	2,5	0,3	2,1
32211 JV	58	84	100	4,6	0,5	2,1
32212 JV	67	93	110	3	0,5	2,1
32213 JV	74,5	108	120	5	0,5	2,1
32214 JV	76,5	108	125	5	0,5	2,6
32215 JV	81	105	130	3,5	0,5	2,6
32216 JV	87,2	120	140	3,5	0,5	2,6
32217 JV	92,3	127	150	3,5	0,5	3,1
32218 JV	97,8	130	160	3,5	0,5	3,1
32219 JV	103	150	170	3,5	0,5	3,1
32220 JV	109,5	160	180	4	0,5	3,6
32221 JV	115	160	190	4	0,5	3,6
32222 JV	120	170	200	4	0,5	3,6
32224 JV	130	180	215	4	0,5	4,1
32226 JV	136	215	230	4	0,5	3,75


311

Lagerreihe 322 / Series 322



AK






Lager / Bearing	d	D	C
32206	30	62	17
32207	35	72	19
32208	40	80	19
32209	45	85	19
32210	50	90	19
32211	55	100	21
32212	60	110	24
32213	65	120	27
32214	70	125	27
32215	75	130	27
32216	80	140	28
32217	85	150	30
32218	90	160	34
32219	95	170	37
32220	100	180	39
32221	105	190	43
32222	110	200	46
32224	120	215	50
32226	130	230	54
32228	140	250	58
32230	150	270	60


NILOS-RING	a_1	a_2	c	d	w*	h	s_1	s_2	G	g	t
32206 AK	60	65	47	30	38	3	0,3	0,5	66	63	21,8
32207 AK	69,5	75	55	35	45	4	0,3	0,5	76	73	24,8
32208 AK	77,5	83	61	40	50	4	0,3	0,5	84	81	25,3
32209 AK	82	88	67	45	55	4	0,3	0,5	89	86	25,3
32210 AK	87,5	93	71	50	60	4	0,3	0,5	94	91	25,3
32211 AK	97	103	78	55	68	4,5	0,3	0,5	104	101	27,3
32212 AK	106,5	113	85	60	73	4,5	0,5	0,5	114	111	30,5
32213 AK	116,5	123	93	65	78	4,5	0,5	0,5	124	121	33,5
32214 AK	121	128	98	70	83	5	0,5	0,5	129	126	34
32215 AK	127	133	104	75	88	5	0,5	0,5	134	131	34
32216 AK	136	143	110	80	95	5	0,5	0,5	144	141	36
32217 AK	146	153	117	85	100	5	0,5	0,5	154	151	39,5
32218 AK	156	163	125	90	105	5	0,5	0,5	164	161	43,5
32219 AK	165	173	133	95	115	5	0,5	0,5	174	171	46,5
32220 AK	175	183	140	100	120	5	0,5	0,5	184	181	50
32221 AK	185	193	148	105	125	5	0,5	0,5	194	191	54
32222 AK	195	203	156	110	135	5	0,5	0,5	204	201	57
32224 AK	210	218	165	120	145	5	0,5	0,5	219	216	62,5
32226 AK	220	233	178	130	160	5	0,5	0,5	234	231	68,5
32228 AK	240	253	192	140	170	5	0,5	0,5	254	251	72,5
32230 AK	260	273	208	150	180	5	0,5	0,5	274	271	78,5

*Bitte beachten: Die Festhaltewarzen des NILOS-RINGES AK haben einen Durchmesser am Grund von 4 mm und eine Höhe von 1,5 mm.
*Please note: Locking nipples of NILOS-RINGS AK have a diameter of 4 mm at the bottom and a height of 1,5 mm.


Lagerreihe 303 / Series 303



AV



JV




Lager / Bearing	d	D	C
30302	15	42	11
30303	17	47	12
30304	20	52	13
30305	25	62	15
30306	30	72	16
30307	35	80	18
30308	40	90	20
30309	45	100	22
30310	50	110	23
30311	55	120	25
30312	60	130	26
30313	65	140	28
30314	70	150	30
30315	75	160	31
30316	80	170	33
30317	85	180	34
30318	90	190	36
30319	95	200	38
30320	100	215	39
30321	105	225	41
30322	110	240	42
30324	120	260	46
30326	130	280	49
30328	140	300	53
30330	150	320	55
30332	160	340	58
30334	170	360	62
30336	180	380	64

NILOS-RING	a	c	d	s	v
30302 AV	40	30	15	0,3	3,6
30303 AV	45	36	17	0,3	3,6
30304 AV	49	40	20	0,3	3,6
30305 AV	60	47	25	0,3	3,6
30306 AV	69,5	55	30	0,3	5,1
30307 AV	77,5	61	35	0,3	5,1
30308 AV	87,5	71	40	0,3	5,6
30309 AV	97	78	45	0,3	5,6
30310 AV	106,5	85	50	0,5	6,6
30311 AV	116,5	98	55	0,5	7,1
30312 AV	127	104	60	0,5	8,1
30313 AV	136	110	65	0,5	8,6
30314 AV	146	124	70	0,5	8,6
30315 AV	156	125	75	0,5	9,6
30316 AV	165	133	80	0,5	10,1
30317 AV	175	140	85	0,5	11,1
30318 AV	185	168	90	0,5	11,1
30319 AV	195	175	95	0,5	12,1
30320 AV	210	178	100	0,5	13,1
30321 AV	220	178	105	0,5	13,1
30322 AV	235	190	110	0,5	13,1
30324 AV	255	235	120	0,5	14,1
30326 AV	274	235	130	0,5	15,7
30328 AV	294	255	140	0,5	15,7
30330 AV	310	270	150	0,5	18,2
30332 AV	330	290	160	0,5	18,2
30334 AV	350	310	170	0,7	19,2
30336 AV	370	315	180	0,7	20,1


NILOS-RING	i	c	D	h	s	v
30302 JV	19	32	42	2	0,3	1,6
30303 JV	20,5	36	47	2	0,3	1,6
30304 JV	24,5	40	52	2	0,3	1,6
30305 JV	30	49	62	2,5	0,3	1,6
30306 JV	37,2	56	72	2,5	0,3	2,1
30307 JV	41,9	63	80	3	0,3	2,1
30308 JV	47,5	70	90	3	0,3	2,6
30309 JV	52,3	80	100	3	0,5	2,6
30310 JV	57,5	87	110	3	0,5	2,6
30311 JV	64	95	120	3	0,5	3,1
30312 JV	69,3	104	130	3	0,5	3,1
30313 JV	75,3	110	140	3,5	0,5	3,6
30314 JV	81	125	150	3,5	0,5	3,6
30315 JV	87,2	128	160	3,5	0,5	3,6
30316 JV	92,3	135	170	3,5	0,5	4,1
30317 JV	97,8	144	180	4	0,5	4,1
30318 JV	106	150	190	4	0,5	4,1
30319 JV	110,5	160	200	4	0,5	5,1
30320 JV	116	170	215	4	0,5	5,1
30321 JV	121	160	225	4	0,5	5,1
30322 JV	126	195	240	4	0,5	5,1
30324 JV	136	215	260	4	0,5	5,1


303

Lagerreihe 303 / Series 303



AK







Lager / Bearing	d	D	C
30302	15	42	11
30303	17	47	12
30304	20	52	13
30305	25	62	15
30306	30	72	16
30307	35	80	18
30308	40	90	20
30309	45	100	22
30310	50	110	23
30311	55	120	25
30312	60	130	26
30313	65	140	28
30314	70	150	30
30315	75	160	31
30316	80	170	33
30317	85	180	34
30318	90	190	36
30319	95	200	38
30320	100	215	39
30321	105	225	41
30322	110	240	42
30324	120	260	46
30326	130	280	49

NILOS-RING	a_1	a_2	c	d	w*	h	s_1	s_2	G	g	t
30302 AK	40	45	30	15	21	3	0,3	0,5	46	43	14,8
30303 AK	45	50	36	17	24	3	0,3	0,5	51	48	15,8
30304 AK	49	55	40	20	28	3	0,3	0,5	56	53	16,8
30305 AK	60	65	47	25	33	3	0,3	0,5	66	63	18,8
30306 AK	69,5	75	55	30	39	4	0,3	0,5	76	73	21,3
30307 AK	77,5	83	61	35	46	4	0,3	0,5	84	81	23,3
30308 AK	87,5	93	71	40	52	4	0,3	0,5	94	91	25,8
30309 AK	97	103	78	45	57	4,5	0,3	0,5	104	101	27,8
30310 AK	106,5	113	85	50	63	4,5	0,5	0,5	114	111	30
30311 AK	116,5	123	93	55	70	4,5	0,5	0,5	124	121	32,5
30312 AK	127	133	104	60	80	5	0,5	0,5	134	131	34,5
30313 AK	136	143	110	65	85	5	0,5	0,5	144	141	37
30314 AK	146	153	117	70	90	5	0,5	0,5	154	151	39
30315 AK	156	163	125	75	95	5	0,5	0,5	164	161	41
30316 AK	165	173	133	80	100	5	0,5	0,5	174	171	43,5
30317 AK	175	183	140	85	105	5	0,5	0,5	184	181	45,5
30318 AK	185	193	148	90	115	5	0,5	0,5	194	191	47,5
30319 AK	195	203	156	95	120	5	0,5	0,5	204	201	50,5
30320 AK	210	218	165	100	125	5	0,5	0,5	219	216	52,5
30321 AK	220	228	178	105	130	5	0,5	0,5	229	226	54,5
30322 AK	235	243	190	110	140	5	0,5	0,5	244	241	55,5
30324 AK	255	263	205	120	150	5	0,5	0,5	264	261	60,5
30326 AK	274	286	235	130	160	5	0,5	0,5	287	281	65

Lagerreihe 313 / Series 313



AV



JV




Lager / Bearing	d	D	C
31305	25	62	13
31306	30	72	14
31307	35	80	15
31308	40	90	17
31309	45	100	18
31310	50	110	19
31311	55	120	21
31312	60	130	22
31313	65	140	23
31314	70	150	25
31315	75	160	26
31316	80	170	27
31317	85	180	28
31318	90	190	30
31319	95	200	32

NILOS-RING	a	c	d	h	s
31305 AV	60	47	25	0,3	5,6
31306 AV	69,5	55	30	0,3	7,1
31307 AV	77,5	61	35	0,3	8,1
31308 AV	87,5	71	40	0,3	8,6
31309 AV	97	78	45	0,3	9,6
31310 AV	106,5	85	50	0,5	10,6
31311 AV	116,5	98	55	0,5	11,1
31312 AV	127	104	60	0,5	12,1
31313 AV	136	110	65	0,5	13,6
31314 AV	146	124	70	0,5	13,6
31315 AV	156	125	75	0,5	14,6
31316 AV	165	133	80	0,5	16,1
31317 AV	175	140	85	0,5	17,1
31318 AV	185	168	90	0,5	17,1
31319 AV	195	175	95	0,5	18,1


NILOS-RING	i	c	D	h	s	v
31305 JV	30	49	62	2,5	0,3	1,6
31306 JV	37,2	56	72	2,5	0,3	2,1
31307 JV	41,9	63	80	3	0,3	2,1
31308 JV	47,5	70	90	3	0,3	2,6
31309 JV	52,3	80	100	3	0,5	2,6
31310 JV	57,5	87	110	3	0,5	2,6
31311 JV	64	95	120	3	0,5	3,1
31312 JV	69,3	104	130	3	0,5	3,1
31313 JV	75,3	110	140	3,5	0,5	3,6
31314 JV	81	125	150	3,5	0,5	3,6
31315 JV	87,2	128	160	3,5	0,5	3,6
31316 JV	92,3	135	170	3,5	0,5	4,1
31317 JV	97,8	144	180	4	0,5	4,1
31318 JV	106	150	190	4	0,5	4,1
31319 JV	110,5	160	200	4	0,5	5,1


313

Lagerreihe 313 / Series 313



AK






Lager / Bearing	d	D	C
31305	25	62	13
31306	30	72	14
31307	35	80	15
31308	40	90	17
31309	45	100	18
31310	50	110	19
31311	55	120	21
31312	60	130	22
31313	65	140	23
31314	70	150	25

NILOS-RING	a_1	a_2	c	d	w*	h	s_1	s_2	G	g	t
31305 AK	60	65	47	25	33	3	0,3	0,5	66	63	18,8
31306 AK	69,5	75	55	30	39	4	0,3	0,5	76	73	21,3
31307 AK	77,5	83	61	35	46	4	0,3	0,5	84	81	23,3
31308 AK	87,5	93	71	40	52	4	0,3	0,5	94	91	25,8
31309 AK	97	103	78	45	57	4,5	0,3	0,5	104	101	27,8
31310 AK	106,5	113	85	50	63	4,5	0,5	0,5	114	111	30
31311 AK	116,5	123	98	55	70	4,5	0,5	0,5	124	121	32,5
31312 AK	127	133	104	60	80	5	0,5	0,5	134	131	34,5
31313 AK	136	143	110	65	85	5	0,5	0,5	144	141	37
31314 AK	146	153	124	70	90	5	0,5	0,5	154	151	39


*Bitte beachten: Die Festhaltewarzen des NILOS-RINGES AK haben einen Durchmesser am Grund von 4 mm und eine Höhe von 1,5 mm.
*Please note: Locking nipples of NILOS-RINGS AK have a diameter of 4 mm at the bottom and a height of 1,5 mm.

323

Lagerreihe 323 / Series 323



AV



JV




Lager / Bearing	d	D	C
32303	17	47	16
32304	20	52	18
32305	25	62	20
32306	30	72	23
32307	35	80	25
32308	40	90	27
32309	45	100	30
32310	50	110	33
32311	55	120	35
32312	60	130	37
32313	65	140	39
32314	70	150	42
32315	75	160	45
32316	80	170	48
32317	85	180	49
32318	90	190	53
32319	95	200	55
32320	100	215	60
32321	105	225	63
32322	110	240	65
32324	120	260	69

NILOS-RING	a	c	d	h	s
32303 AV	45	36	17	0,3	4,6
32304 AV	49	40	20	0,3	4,6
32305 AV	60	47	25	0,3	5,6
32306 AV	69,5	55	30	0,3	6,1
32307 AV	77,5	61	35	0,3	8,1
32308 AV	87,5	71	40	0,3	8,6
32309 AV	97	78	45	0,3	8,6
32310 AV	106,5	85	50	0,5	9,6
32311 AV	116,5	98	55	0,5	11,1
32312 AV	127	104	60	0,5	12,1
32313 AV	136	110	65	0,5	12,6
32314 AV	146	124	70	0,5	12,6
32315 AV	156	125	75	0,5	13,6
32316 AV	165	133	80	0,5	14,1
32317 AV	175	140	85	0,5	15,1
32318 AV	185	168	90	0,5	15,1
32319 AV	195	175	95	0,5	17,1
32320 AV	210	178	100	0,5	18,1
32321 AV	220	178	105	0,5	19,1
32322 AV	235	190	110	0,5	20,1
32324 AV	255	235	120	0,5	22,1


NILOS-RING	i	c	D	h	s	v
32304 JV	24,5	40	52	2	0,3	1,6
32305 JV	30	49	62	2,5	0,3	1,6
32306 JV	37,2	56	72	2,5	0,3	2,1
32307 JV	41,9	63	80	3	0,3	2,1
32308 JV	47,5	70	90	3	0,3	2,6
32309 JV	52,3	80	100	3	0,5	2,6
32310 JV	57,5	87	110	3	0,5	2,6
32311 JV	64	95	120	3	0,5	3,1
32312 JV	69,3	104	130	3	0,5	3,1
32313 JV	75,3	110	140	3,5	0,5	3,6
32314 JV	81	125	150	3,5	0,5	3,6
32315 JV	87,2	128	160	3,5	0,5	3,6
32316 JV	92,3	135	170	3,5	0,5	4,1
32317 JV	97,8	144	180	4	0,5	4,1
32318 JV	106	150	190	4	0,5	4,1
32319 JV	110,5	160	200	4	0,5	5,1
32320 JV	116	170	215	4	0,5	5,1
32321 JV	121	160	225	4	0,5	5,1
32322 JV	126	195	240	4	0,5	5,1
32324 JV	136	215	260	4	0,5	5,1


323

Lagerreihe 323 / Series 323



AK






Lager / Bearing	d	D	C
32304	20	52	18
32305	25	62	20
32306	30	72	23
32307	35	80	25
32308	40	90	27
32309	45	100	30
32310	50	110	33
32311	55	120	35
32312	60	130	37
32313	65	140	39
32314	70	150	42
32315	75	160	45
32316	80	170	48
32317	85	180	49
32318	90	190	53
32319	95	200	55
32320	100	215	60
32321	105	225	63
32322	110	240	65
32324	120	260	69

NILOS-RING	a_1	a_2	c	d	w*	h	s_1	s_2	G	g	t
32304 AK	49	55	40	20	28	3	0,3	0,5	56	53	22,8
32305 AK	60	65	47	25	33	3	0,3	0,5	66	63	25,8
32306 AK	69,5	75	55	30	39	4	0,3	0,5	76	73	29,3
32307 AK	77,5	83	61	35	46	4	0,3	0,5	84	81	33,3
32308 AK	87,5	93	71	40	52	4	0,3	0,5	94	91	35,8
32309 AK	97	103	78	45	57	4,5	0,3	0,5	104	101	38,8
32310 AK	106,5	113	85	50	63	4,5	0,5	0,5	114	111	43
32311 AK	116,5	123	93	55	70	4,5	0,5	0,5	124	121	46,5
32312 AK	127	133	104	60	80	5	0,5	0,5	134	131	49,5
32313 AK	136	143	110	65	85	5	0,5	0,5	144	141	52
32314 AK	146	153	117	70	90	5	0,5	0,5	154	151	55
32315 AK	156	163	125	75	95	5	0,5	0,5	164	161	59
32316 AK	165	173	133	80	100	5	0,5	0,5	174	171	62,5
32317 AK	175	183	140	85	105	5	0,5	0,5	184	181	64,5
32318 AK	185	193	148	90	115	5	0,5	0,5	194	191	68,5
32319 AK	195	203	156	95	120	5	0,5	0,5	204	201	72,5
32320 AK	210	218	165	100	125	5	0,5	0,5	219	216	78,5
32321 AK	220	228	178	105	130	5	0,5	0,5	244	241	85,5
32322 AK	235	243	190	110	140	5	0,5	0,5	244	241	85,5
32324 AK	255	263	205	120	150	5	0,5	0,5	261	261	91,5

*Bitte beachten: Die Festhaltewarzen des NILOS-RINGES AK haben einen Durchmesser am Grund von 4 mm und eine Höhe von 1,5 mm.
*Please note: Locking nipples of NILOS-RINGS AK have a diameter of 4 mm at the bottom and a height of 1,5 mm.


Lagerreihe 332 / Series 332



AV



JV



Lager / Bearing	d	D	C
33205	25	52	18
33206	30	62	19,5
33207	35	72	22
33208	40	80	25
33209	45	85	25
33210	50	90	24,5
33211	55	100	27
33212	60	110	29
33213	65	120	32
33214	70	125	32
33215	75	130	31
33216	80	140	35
33217	85	150	37
33218	90	160	42
33219	95	170	44
33220	100	180	48
33221	105	190	52


NILOS-RING	a	c	d	s	v
33205 AV	51	42	25	0,3	4,2
33206 AV	60	47	30	0,3	5,7
33207 AV	69,5	55	35	0,3	6,2
33208 AV	77,5	61	40	0,3	7,2
33209 AV	82	67	45	0,3	7,2
33210 AV	87,5	72	50	0,3	7,7
33211 AV	97	78	55	0,3	8,2
33212 AV	106,5	85	60	0,5	9,2
33213 AV	116,5	98	65	0,5	9,2
33214 AV	121	98	70	0,5	9,2
33215 AV	127	104	75	0,5	10,2
33216 AV	136	110	80	0,5	11,2
33217 AV	146	124	85	0,5	12,2
33218 AV	156	125	90	0,5	13,2
33219 AV	165	133	95	0,5	14,2
33220 AV	175	140	100	0,5	15,2
33221 AV	185	168	105	0,5	16,2

Lieferung auf Anfrage


Delivery only on request


332

Lagerreihe 332 / Series 332



AK







Lager / Bearing	d	D	C
33205	25	52	18
33206	30	62	19,5
33207	35	72	22
33208	40	80	25
33209	45	85	25
33210	50	90	24,5
33211	55	100	27
33212	60	110	29
33213	65	120	32
33214	70	125	32
33215	75	130	31
33216	80	140	35
33217	85	150	37
33218	90	160	42
33219	95	170	44
33220	100	180	48
33221	105	190	52

NILOS-RING	a_1	a_2	c	d	w*	h	s_1	s_2	G	g	t
33205 AK	51	55	40	25	34	3	0,3	0,5	56	52	22,4
33206 AK	60	65	47	30	38	3	0,3	0,5	66	62	25,4
33207 AK	69,5	75	55	35	45	4	0,3	0,5	76	72	28,4
33208 AK	77,5	83	61	40	50	4	0,3	0,5	84	80	32,4
33209 AK	82	88	67	45	55	4	0,3	0,5	89	85	32,4
33210 AK	87,5	93	71	50	60	4	0,3	0,5	94	90	32,4
33211 AK	97	103	78	55	68	4,5	0,3	0,5	105	100	35,4
33212 AK	106,5	113	85	60	73	4,5	0,5	0,5	115	110	38,6
33213 AK	116,5	123	93	65	78	4,5	0,5	0,5	125	120	41,6
33214 AK	121	128	98	70	83	5	0,5	0,5	130	125	41,6
33215 AK	127	133	104	75	88	5	0,5	0,5	135	130	41,6
33216 AK	136	143	110	80	95	5	0,5	0,5	145	140	46,6
33217 AK	146	153	117	85	100	5	0,5	0,5	155	150	49,6
33218 AK	156	163	125	90	105	5	0,5	0,5	165	160	55,6
33219 AK	165	173	133	95	115	5	0,5	0,5	175	170	58,6
33220 AK	175	183	140	100	120	5	0,5	0,5	185	180	63,6
33221 AK	185	193	148	105	125	5	0,5	0,5	195	190	68,6

*Bitte beachten: Die Festhaltewarzen des NILOS-RINGES AK haben einen Durchmesser am Grund von 4 mm und eine Höhe von 1,5 mm.
*Please note: Locking nipples of NILOS-RINGS AK have a diameter of 4 mm at the bottom and a height of 1,5 mm.

AV






Maße in mm / Dimensions by mm


NILOS-RING	a	c	d	s	v
A2047/A2126 AV	29	25	11,99	0,3	2,2
00050/00150 AV	36	24	1217	0,3	2,9
A4050/A4138 AV	32,5	27	12,7	0,3	2,6
A4059/A4138 AV	32,5	27,	14,98	0,3	2,9
A4050/A4138B AV	32,5	27	14,98	0,3	2,6
09062/09196 AV	46,8	40	15,87	0,3	6,1
17580/17520 AV	40	30	15,87	0,3	3,7
A6062/A6157 AV	38	30	15,87	0,3	2,9
03062/03162 AV	38	30	15,88	0,3	3,7
L21549/L21511 AV	32,5	27	15,88	0,3	2,6
03066X/03157X AV	38	30	17	0,3	3,7
A6157/A6067 AV	38	30	17	0,3	2,9
05066/5185 AV	43	34	17	0,3	3,8
LM11749/LM11710 AV	38	30	17,46	0,3	3,7
05075/05185S AV	43	34	19,05	0,3	3,8
05075/05185 AV	43	34	19,05	0,3	3,8
05075X/05185 AV	43	34	19,05	0,3	3,8
05075X/05185S AV	43	34	19,05	0,3	3,8
09067/09195 AV	46,8	40	19,05	0,3	4,3
09067/09196 AV	46,8	40	19,05	0,3	4,3
09074/09196 AV	46,8	40	19,05	0,3	6,1
09074/09194 AV	46,8	40	19,05	0,3	6,1
09078X/09194 AV	46,8	40	19,05	0,3	6,1
09078X/09196 AV	46,8	40	19,05	0,3	6,1
21075/21212 AV	52	43	19,05	0,3	6,9
A6075/A6157 AV	8	30	19,05	0,3	2,9
LM11949/LM11910 AV	43	34	19,05	0,3	3,9
05079/05185S AV	43	34	19,98	0,3	3,8
05079/05185 AV	43	34	19,98	0,3	3,8
07079/07196 AV	48,3	40	20,05	0,3	4,5
12580/12520 AV	46,8	40	20,63	0,3	4,5
M12649/M12610 AV	46,8	40	21,43	0,3	4,1
LM12749/LM12710 AV	43	34	21,998	0,3	3,9
LM12749/LM12711 AV	43	34	21,998	0,3	3,9
LL52549/LL52510 AV	40	33	22,23	0,3	3
07093/07196AV	48,3	40	23,81	0,3	4,5
1779/1729 AV	55	45	23,81	0,3	4
23092/23256 AV	63	53	23,86	0,3	6,9
07097/07204 AV	49	40	25	0,3	2,7
07097/07205 AV	49	40	25	0,3	2,7
17098/17244 AV	60	53	25	0,3	2,2
07100S/07210X AV	48,3	40	25,4	0,3	2,8
07100/07204B AV	48,3	40	25,4	0,3	2,8
07100SL/07196 AV	48,3	40	25,4	0,3	4,5

Maße in Zoll / Dimensions by inch

a	c	d	s	v
1,1417	0,9843	0,4720	0,0118	0,866
1,4055	0,9843	0,5000	0,0118	0,1142
1,2795	1,0630	0,5000	0,0118	0,1024
1,2795	1,0630	0,5898	0,0118	0,1024
1,2795	1,0630	0,5898	0,0118	0,1024
1,8425	1,5748	0,6248	0,0118	0,2402
1,5748	1,1811	0,6248	0,0118	0,1457
1,4961	1,1811	0,6248	0,0118	0,1142
1,4961	1,1811	0,6252	0,0118	0,1457
1,2795	1,0630	0,6252	0,0118	0,1024
1,4961	1,1811	0,6693	0,0118	0,1457
1,4961	1,1811	0,6693	0,0118	0,1142
1,6929	1,3386	0,7500	0,0118	0,1496
1,4961	1,1811	0,6874	0,0118	0,1457
1,6929	1,3386	0,7500	0,0118	0,1496
1,6929	1,3386	0,7500	0,0118	0,1496
1,6929	1,3386	0,7500	0,0118	0,1496
1,6929	1,3386	0,7500	0,0118	0,1496
1,8425	1,5748	0,7500	0,0118	0,1693
1,8425	1,5748	0,7500	0,0118	0,1693
1,8425	1,5748	0,7500	0,0118	0,2402
1,8425	1,5748	0,7500	0,0118	0,2402
1,8425	1,5748	0,7500	0,0118	0,2402
1,8425	1,5748	0,7500	0,0118	0,2402
2,0472	1,6929	0,7500	0,0118	0,2717
1,4961	1,1811	0,7500	0,0118	0,1142
1,6929	1,3386	0,7500	0,0118	0,1535
1,6929	1,3386	0,7866	0,0118	0,1496
1,6929	1,3386	0,7866	0,0118	0,1496
1,9016	1,5748	0,7894	0,0118	0,1722
1,8425	1,5748	0,8122	0,0118	0,1722
1,8425	1,5748	0,8437	0,0118	0,1614
1,6929	1,3386	0,8661	0,0118	0,1535
1,6929	1,3386	0,8661	0,0118	0,1535
1,5748	1,2992	0,8752	0,0118	0,1181
1.9016	1,5748	0,9374	0,0118	0,1772
2,1654	1,7717	0,9374	0,0118	0,1772
2,4083	2,0866	0,9394	0,0118	0,2717
1,9291	1,5748	0,9843	0,0118	0,1063
1,9291	1,5748	0,9843	0,0118	0,1063
2,3622	2,0866	0,9845	0,0118	0,0866
1,9016	1,5748	1,000	0,0118	0,1102
1,9016	1,5748	1,000	0,0118	0,1102
1,9016	1,5748	1,000	0,0118	0,1107

AV






Maße in mm / Dimensions by mm


NILOS-RING	a	c	d	s	v
07100/07196 AV	48,3	40	25,4	0,3	4,5
15101/15245 AV	60	53	25,4	0,3	5,3
15100/15245 AV	60	53	25,4	0,3	5,3
15100S/15245 AV	60	53	25,4	0,3	5,3
1986/1932 AV	55	45	25,4	0,3	4,5
1986/1922 AV	55	45	25,4	0,3	4,5
1994X/1922 AV	55	45	25,4	0,3	4,5
23100/23256 AV	63	53	25,4	0,3	6,9
41100/41286 AV	69,5	55	25,4	0,3	7,7
HM88630/HM88610 AV	69,9	59	25,4	0,3	6
L44643/L44610 AV	48,3	40	25,4	0,3	4,1
M84548/M84510 AV	55	45	25,4	0,3	5,2
L44649/L44610 AV	48,3	40	26,99	0,3	4,1
1985/1922 AV	55	45	28,57	0,3	4,5
1985/1932 AV	55	45	28,57	0,3	4,5
1888/1920 AV	55	45	28,57	0,3	4,5
1988/1922 AV	55	45	28,57	0,3	4,5
1988/1932 AV	55	45	28,57	0,3	4,5
15590/15520 AV	55	45	28,57	0,3	4,5
15590/15520B AV	55	45	28,57	0,3	4,5
15113/15245 AV	60	53	28,57	0,3	5,3
41125/41286 AV	69,5	55	28,57	0,3	7,6
41126/41286 AV	69,5	55	28,57	0,3	7,6
HH46349/HH46310 AV	74	63	28,57	0,3	6,9
L45449/L45410 AV	48,3	42	29	0,3	4
17118/17245D AV	60	53	29,98	0,3	2,2
17118/17244 AV	60	53	29,98	0,3	2,2
17118/17244B AV	60	53	29,98	0,3	2,2
17118S/17244 AV	60	53	29,98	0,3	2,2
17119/17244 AV	60	53	30,16	0,3	2,2
17119/17244B AV	60	53	30,16	0,3	2,2
2558/2523 AV	67	55	30,16	0,3	5,3
2558/2523S AV	67	55	30,16	0,3	5,3
M86649/M86610 AV	61	53	30,16	0,3	5,3
2687/2630 AV	61	53	30,16	0,3	5,3
M88043/M88011 AV	65,3	54	30,16	0,3	5,3
15120 / 15245 AV	60	53	30,21	0,3	5,3
14116 / 14276B AV	67	55	30,22	0,3	4,5
02475 / 024020 AV	64,5	54	31,75	0,3	5,3
2475 / 2420 AV	64,5	54	31,75	0,3	5,3
2580 / 2520 AV	64,5	54	31,75	0,3	5,3
08125 / 08231 AV	57	47	31,75	0,3	5,3
08125 / 08231 AV	57	47	31,75	0,3	4,5
14125A / 14274 AV	67	47	31,75	0,3	4,5
14125A / 12476 AV	67	55	31,75	0,3	4,5
15123 / 15245 AV	60	55	31,75	0,3	4,5
15123 / 15243 AV	60	53	31,75	0,3	4,4
15126 / 15245 AV	60	53	31,75	0,3	4,4
15125 / 15245 AV	60	53	31,75	0,3	5,3
2580 / 2523S AV	67	55	31,75	0,3	5,3
2580 / 2523 AV	67	55	31,75	0,3	5,3
2582 / 2523 AV	67	55	31,75	0,3	5,3
3193 / 3120 AV	69,5	55	31,75	0,3	6,9

Maße in Zoll / Dimensions by inch

a	c	d	s	v
1,9016	1,5748	1,0000	0,0118	0,1772
2,3622	2,0866	1,0000	0,0118	0,2087
2,3622	2,0866	1,0000	0,0118	0,2087
2,3622	2,0866	1,0000	0,0118	0,2087
2,1654	1,7717	1,0000	0,0118	0,1772
2,1654	1,7717	1,0000	0,0118	0,1772
2,1654	1,7717	1,0000	0,0118	0,1772
2,4803	2,0866	1,0000	0,0118	0,2717
2,7362	2,1654	1,0000	0,0118	0,3031
2,7520	2,3228	1,0000	0,0118	0,2362
1,9016	1,5748	1,0000	0,0118	0,1614
2,1654	1,7717	1,0000	0,0118	0,2047
1,9016	1,5748	1,0626	0,0118	0,1614
2,1654	1,7717	1,1248	0,0118	0,1772
2,1654	1,7717	1,1248	0,0118	0,1772
2,1654	1,7717	1,1248	0,0118	0,1772
2,1654	1,7717	1,1248	0,0118	0,1772
2,1654	1,7717	1,1248	0,0118	0,1772
2,1654	1,7717	1,1248	0,0118	0,1772
2,1654	1,7717	1,1248	0,0118	0,1772
2,3622	2,0866	1,1248	0,0118	0,2087
2,7362	2,1654	1,1248	0,0118	0,2992
2,7362	2,1654	1,1248	0,0118	0,2992
2,9134	2,4803	1,1248	0,0118	0,2717
1,9016	1,6535	1,1417	0,0118	0,1575
2,3622	2,0866	1,1803	0,0118	0,0866
2,3622	2,0866	1,1803	0,0118	0,0866
2,3622	2,0866	1,1803	0,0118	0,0866
2,3622	2,0866	1,1803	0,0118	0,0866
2,3622	2,0866	1,1874	0,0118	0,0866
2,3622	2,0866	1,1874	0,0118	0,0866
2,6378	2,1654	1,1874	0,0118	0,2087
2,6378	2,1654	1,1874	0,0118	0,2087
2,4016	2,0866	1,1874	0,0118	0,2087
2,4016	2,0866	1,1874	0,0118	0,2087
2,5709	2,1260	1,1874	0,0118	0,2087
2,3622	2,0866	1,1894	0,0118	0,2087
2,6378	2,1654	1,1898	0,0118	0,1772
2,5394	2,1260	1,2500	0,0118	0,2087
2,5394	2,1260	1,2500	0,0118	0,2087
2,5394	2,1260	1,2500	0,0118	0,2087
2,2441	1,8540	1,2500	0,0118	0,1772
2,2441	1,8540	1,2500	0,0118	0,1772
2,6378	2,1654	1,2500	0,0118	0,1772
2,6378	2,1654	1,2500	0,0118	0,1772
2,3622	2,0866	1,2500	0,0118	0,1732
2,3622	2,0866	1,2500	0,0118	0,1732
2,3622	2,0866	1,2500	0,0118	0,2087
2,3622	2,0866	1,2500	0,0118	0,2087
2,6378	2,1654	1,2500	0,0118	0,2087
2,6378	2,1654	1,2500	0,0118	0,2087
2,6378	2,1654	1,2500	0,0118	0,2087
2,7362	2,1654	1,2500	0,0118	0,2717

AV






Maße in mm / Dimensions by mm


NILOS-RING	a	c	d	s	v
43125/43312 AV	74	63	31,75	0,3	8,5
43125/43300 AV	74	63	31,75	0,3	8,5
HM88542/HM88510 AV	70,9	62	31,75	0,3	6,9
LM67048/LM67010 AV	57	47	31,75	0,3	4,6
LM67047/LM67010 AV	57	47	31,75	0,3	4,6
M88046/M88010 AV	65,3	54	31,75	0,3	5,3
2585/2523 AV	67	55	33,33	0,3	5,3
43131/43312 AV	74	63	33,33	0,3	8,5
43132/43312 AV	74	63	33,33	0,3	8,5
M88048/M88010 AV	65,3	54	33,33	0,3	5,3
M88048/M88011 AV	65,3	54	33,33	0,3	5,3
25877/25820 AV	69,5	55	34,92	0,3	5,3
31593/31520 AV	74	63	34,92	0,3	6,1
31594/31520 AV	74	63	34,92	0,3	6,1
3478/3420 AV	77,5	61	34,92	0,3	6,1
3872/3820 AV	82	67	34,92	0,3	6,9
HM88649/HM88610 AV	69,9	59	34,92	0,3	6
HM89446/HM89410 AV	74	63	34,92	0,3	6,9
LM48548/LM48510 AV	63	53	34,92	0,3	4,6
M38549/M38510 AV	64,5	54	34,93	0,3	4,5
14139X/14282 AV	67	55	35	0,3	4,5
14139/14276B AV	67	55	35	0,3	4,5
14137A/14274 AV	67	55	35	0,3	4,5
14137A/14276 AV	67	55	35	0,3	4,5
14138/14276 AV	67	55	35	0,3	4,5
14138A/14276 AV	67	55	35	0,3	4,5
23691/23621 AV	69,5	55	35,05	0,3	5,3
31597/31521 AV	74	63	36,51	0,3	6,1
3479/3420 AV	77,5	63	36,51	0,3	6,1
HM89449/HM89411 AV	74	63	36,51	0,3	6,9
HM89449/HM89410 AV	74	63	36,51	0,3	6,9
JL69349/JL69310 AV	61	53	38	0,3	3,8
13685/13621 AV	67	55	38,1	0,3	4,5
13687/13621 AV	67	55	38,1	0,3	4,5
13889/13830 AV	61	53	38,1	0,3	3,7
13889/13836 AV	61	55	38,1	0,3	4,5
16150/16282 AV	69,5	55	38,1	0,3	5,3
16150/16284 AV	69,5	55	38,1	0,3	5,3
16150/16284B AV	69,5	55	38,1	0,3	5,3
19150/19268 AV	65,3	54	38,1	0,3	4,5
2788/2720 AV	74	63	38,1	0,3	5,3
NA24776SW/24720D AV	74	63	38,1	0,3	5,3
2788/2729 AV	74	63	38,1	0,3	5,3
2788/2735X AV	70,9	62	38,1	0,3	5,3
27880/27820 AV	77,5	61	38,1	0,3	6,6
27881/27820 AV	77,5	61	38,1	0,3	6,6
3490/3420 AV	77,5	61	38,1	0,3	6,1
415/414 AV	86,5	71	38,1	0,3	5,3
418/414 AV	86,5	71	38,1	0,3	5,3
44150/44348 AV	86,5	71	38,1	0,3	8,5
525/522 AV	97	78	38,1	0,3	8,5
527/520X AV	97	78	44, 45	0,3	8,5

Maße in Zoll / Dimensions by inch

a	c	d	s	v
2,9134	2,4803	1,2500	0,0118	0,3346
2,9134	2,4803	1,2500	0,0118	0,3346
2,7913	2,4409	1,2500	0,0118	0,2717
2,2441	1,8504	1,2500	0,0118	0,1811
2,2441	1,8504	1,2500	0,0118	0,1811
2,5709	2,1260	1,2500	0,0118	0,2087
2,6378	2,1654	1,3122	0,0118	0,2087
2,9134	2,4803	1,3122	0,0118	0,3346
2,9134	2,4803	1,3122	0,0118	0,3346
2,5709	2,1260	1,3122	0,0118	0,2087
2,5709	2,1260	1,3122	0,0118	0,2087
2,7362	2,1654	1,3748	0,0118	0,2087
2,9134	2,4803	1,3748	0,0118	0,2402
2,9134	2,4803	1,3748	0,0118	0,2402
3,0512	2,4016	1,3748	0,0118	0,2402
3,2283	2,6378	1,3748	0,0118	0,2717
2,7520	2,3228	1,3748	0,0118	0,2362
2,9134	2,4803	1,3748	0,0118	0,2717
2,4803	2,0866	1,3748	0,0118	0,1811
2,5394	2,1260	1,3752	0,0118	0,1772
2,6378	2,1654	1,3780	0,0118	0,1772
2,6378	2,1654	1,3780	0,0118	0,1772
2,6378	2,1654	1,3780	0,0118	0,1772
2,6378	2,1654	1,3780	0,0118	0,1772
2,6378	2,1654	1,3780	0,0118	0,1772
2,6378	2,1654	1,3780	0,0118	0,1772
2,7362	2,1654	1,3799	0,0118	0,2087
2,9134	2,4803	1,4374	0,0118	0,2402
3,0512	2,4803	1,4374	0,0118	0,2402
2,9134	2,4803	1,4374	0,0118	0,2717
2,9134	2,4803	1,4374	0,0118	0,2717
2,4016	2,0866	1,4961	0,0118	0,1496
2,6378	2,1654	1,5000	0,0118	0,1772
2,6378	2,1654	1,5000	0,0118	0,1772
2,4016	2,0866	1,5000	0,0118	0,1457
2,6378	2,1654	1,5000	0,0118	0,1772
2,7362	2,1654	1,5000	0,0118	0,2087
2,7362	2,1654	1,5000	0,0118	0,2087
2,7362	2,1654	1,5000	0,0118	0,2087
2,5709	2,1260	1,5000	0,0118	0,1772
2,9134	2,4803	1,5000	0,0118	0,2087
2,9134	2,4803	1,5000	0,0118	0,2087
2,9134	2,4803	1,5000	0,0118	0,2087
2,7913	2,4409	1,5000	0,0118	0,2087
3,0512	2,4016	1,5000	0,0118	0,2598
3,0512	2,4016	1,5000	0,0118	0,2598
3,0512	2,4016	1,5000	0,0118	0,2402
3,4055	2,7953	1,5000	0,0118	0,2087
3,4055	2,7953	1,5000	0,0118	0,2087
3,4055	2,7953	1,5000	0,0118	0,3346
3,8189	3,0709	1,5000	0,0118	0,3346
3,8189	3,0709	1,5000	0,0118	0,3346

AV






Maße in mm / Dimensions by mm


NILOS-RING	a	c	d	s	v
HM801346/HM801310 AV	80	65	38,1	0,3	6,9
LM29749/LM29710 AV	63	53	38,1	0,3	4,6
LM29748/LM297710 AV	63	53	38,1	0,3	4,6
3320/3381 AV	77,5	61	38/15	0.3	6
53150/53375 AV	92	80	38.15	0.3	10.8
2789 / 2735X AV	70,9	62	39,68	0,3	5,3
344 / 332 AV	77,5	61	40	0,3	3,7
HM801349/HM801310 AV	80	65	40,48	0,3	6,9
LM300849/LM300811 AV	66,5	57	41	0,3	4,5
18590/18520 AV	69,9	59	41,27	0,3	4,5
24780/24720 AV	74	63	41,27	0,3	5,3
24780/24721 AV	74	63	41,27	0,3	5,3
26882/26822 AV	77,5	61	41,27	0,3	5,3
26882/820 AV	77,5	61	41,27	0,3	5,3
3576/3525B AV	82	67	41,27	0,3	6,9
3877/3820 AV	82	67	41,27	0,3	6,9
3577/3525B AV	82	67	41,27	0,3	6,9
3585/3520 AV	82	67	41,27	0,3	6,9
44162/44348 AV	86,5	71	41,27	0,3	8,5
53162/53375 AV	92	80	41,27	0,3	10,9
11162/11300 AV	74	63	41,28	0,3	4,2
HM803146/HM803110 AV	86,5	71	41,28	0,3	7,7
HM903245/HM903210 AV	92	80	41,28	0,3	9,3
LM501349/LM501310 AV	70,9	62	41,28	0,3	5,3
225577/25520 AV	80	65	42,87	0,3	5,3
25576/25520 AV	80	65	42,87	0,3	5,3
25577/25523 AV	80	65	42,87	0,3	5,3
18685/18620 AV	75,5	67	44,45	0,3	4,5
25580/25522 AV	80	65	44,45	0,3	5,3
35175/35326 AV	80	65	44,45	0,3	5,3
25580/25520 AV	80	65	44,45	0,3	5,3
25580/25523 AV	80	65	44,45	0,3	5,3
25581/25520 AV	80	65	44,45	0,3	5,3
25581/25522AV	80	65	44,45	0,3	5,3
3578/3525 AV	82	67	44,45	0,3	6,9
354A/355A AV	82	67	44,45	0,3	6,9
3578/3525B AV	82	67	44,45	0,3	6,9
435/432 AV	92	80	44,45	0,3	6,1
49175/49368 AV	90,5	72	44,45	0,3	6,9
3720/3782 AV	90,5	72	44,45	0,3	6,9
527/522 AV	97	78	44,45	0,3	8,5
53176/53375 AV	92	80	44,45	0,3	10,8
53177/53375 AV	92	80	44,45	0,3	10,8
53176/53387 AV	95	83	44,45	0,3	10,9
5356/5335 AV	101	80	44,45	0,3	7,7
59175/59412 AV	101	80	44,45	0,3	8,5
HM803149/HM803110 AV	86,5	71	44,45	0,3	7,7
HM903249/HM903210 AV	92	80	44,45	0,3	9,3
L102849/L102810 AV	70,9	62	44,45	0,3	3,7
LL103049/LL103010 AV	69,5	59	44,45	0,3	3,7

Maße in Zoll / Dimensions by inch

a	c	d	s	v
3,1496	2,5591	1,5000	0,0118	0,2717
2,4803	2,0866	1,5000	0,0118	0,1811
2,4803	2,0866	1,5000	0,0118	0,1811
3,0512	2,4016	1,5020	0,118	0,2362
3,6620	3,1496	1,5020	0,118	0,4252
2,7913	2,4409	1,5622	0,0118	0,2087
3,0512	2,4016	1,5748	0,0118	0,1457
3,1496	2,5591	1,5937	0,0118	0,2717
2,6181	2,2441	1,6142	0,0118	0,1772
2,7520	2,3228	1,6248	0,0118	0,1772
2,9134	2,4803	1,6248	0,0118	0,2087
2,9134	2,4803	1,6248	0,0118	0,2087
3,0512	2,4016	1,6248	0,0118	0,2087
3,0512	2,4016	1,6248	0,0118	0,2087
3,2283	2,6378	1,6248	0,0118	0,2717
3,2283	2,6378	1,6248	0,0118	0,2717
3,2283	2,6378	1,6248	0,0118	0,2717
3,2283	2,6378	1,6248	0,0118	0,2717
3,4055	2,7953	1,6248	0,0118	0,3346
3,6220	3,1496	1,6248	0,0118	0,4291
2,9134	2,4803	1,6252	0,0118	0,1654
3,4055	2,7953	1,6252	0,0118	0,3031
3,6220	3,1496	1,6252	0,0118	0,3661
2,7913	2,4409	1,6252	0,0118	0,2087
3,1496	2,5591	1,6878	0,0118	0,2087
3,1496	2,5591	1,6878	0,0118	0,2087
3,1496	2,5591	1,6878	0,0118	0,2087
2,9724	2,6378	1,7500	0,0118	0,1772
3,1496	2,5591	1,7500	0,0118	0,2087
3,1496	2,5591	1,7500	0,0118	0,2087
3,1496	2,5591	1,7500	0,0118	0,2087
3,1496	2,5591	1,7500	0,0118	0,2087
3,1496	2,5591	1,7500	0,0118	0,2087
3,1496	2,5591	1,7500	0,0118	0,2087
3,2283	2,6378	1,7500	0,0118	0,2717
3,2283	2,6378	1,7500	0,0118	0,2717
3,2283	2,6378	1,7500	0,0118	0,2717
3,6220	3,1496	1,7500	0,0118	0,2402
3,5630	2,8346	1,7500	0,0118	0,2717
3,5630	2,8346	1,7500	0,0118	0,2717
3,8189	3,0709	1,7500	0,0118	0,3346
3,6220	3,1496	1,7500	0,0118	0,4252
3,6220	3,1496	1,7500	0,0118	0,4252
3,7402	3,2677	1,7500	0,0118	0,4291
3,9764	3,1496	1,7500	0,0118	0,3031
3,9764	3,1496	1,7500	0,0118	0,3346
3,4055	2,7953	1,7500	0,0118	0,3031
3,6220	3,1496	1,7500	0,0118	0,3661
2,7913	2,4409	1,7500	0,0118	0,1457
2,7362	2,3228	1,7500	0,0118	0,1457

AV






Maße in mm / Dimensions by mm

Maße in Zoll / Dimensions by inch

NILOS-RING	a	c	d	s	v	a	c	d	s	v
55175/55437 AV	106,5	85	44,5	0,5	10,1	4,1929	3,3465	1,7520	0,0197	0,3976
3776/3720 AV	90,5	72	44,98	0,3	6,9	3,5630	2,8346	1,7709	0,0118	0,2717
3776/3720B AV	90,5	72	44,98	0,3	6,9	3,5630	2,8346	1,7709	0,0118	0,2717
25584/25518AV	78,6	68	45	0,3	5,3	3,0945	2,6772	1,7717	0,0118	0,2087
25584A/25518 AV	78,6	68	45	0,3	5,3	3,0945	2,6772	1,7717	0,0118	0,2087
25584/25526 AV	82	67	45	0,3	5,3	3,2283	2,6378	1,7717	0,0118	0,2087
LM603049/LM603011 AV	75,5	67	45,24	0,3	5,3	2,9724	2,6378	1,7811	0,0118	0,2087
LM603049/LM603012 AV	75,5	67	45,24	0,3	5,3	2,9724	2,6378	1,7811	0,0118	0,2087
LM102949/LM102910 AV	70,9	62	45,29	0,3	4,3	2,7913	2,4409	1,7831	0,0118	0,1693
25590/25520 AV	80	65	45,62	0,3	5,3	3,1496	2,5591	1,7961	0,0118	0,2087
LM503349/LM503310 AV	73	63	46	0,3	4,5	2,8740	2,4803	1,8110	0,0118	0,1772
18690/18620 AV	75,5	67	46,03	0,3	4,5	2,9724	2,6378	1,8122	0,0118	0,1772
436/432 AV	92	80	46,03	0,3	6,1	3,6220	3,1496	1,8122	0,0118	0,2402
3777/3720 AV	90,5	72	46,09	0,3	6,9	3,5630	2,8346	1,8146	0,0118	0,2717
369S/362A AV	86,5	71	47,62	0,3	4,7	3,4055	2,7953	1,8748	0,0118	0,1850
55187C/55443 AV	107,5	90	47,625	0,5	10	4,2323	3,5433	1,8750	0,0197	0,3937
55187/55443 AV	107,5	90	47,625	0,5	10	4,2323	3,5433	1,8750	0,0197	0,3937
HM804846/HM804810 AV	92	80	47,64	0,3	7,6	3,6220	3,1496	1,8756	0,0118	0,2992
72187/72487 AV	119	98	47,68	0,5	11,6	4,6850	3,8583	1,8772	0,0197	0,4567
HM804848/HM804810 AV	92	80	48,41	0,3	7,6	3,6220	3,1496	1,9059	0,0118	0,2992
3781/3720 AV	90,5	72	49,21	0,3	6,9	3,5630	2,8346	1,9374	0,0118	0,2717
5395/5335 AV	101	80	49,21	0,3	7,7	3,9764	3,1496	1,9374	0,0118	0,3031
HM807044/HM807010 AV	101	80	49,22	0,3	8,5	3,9764	3,1496	1,9378	0,0118	0,3346
365/362 AV	87,5	71	50	0,3	4,7	3,4449	2,7953	1,9685	0,0118	0,1850
366/362B AV	87,5	71	50	0,3	4,7	3,4449	2,7953	1,9685	0,0118	0,1850
365/363D AV	87,5	71	50	0,3	4,5	3,4449	2,7953	1,9685	0,0118	0,1772
465/453A AV	104,5	90	50	0,3	6,1	4,1142	3,5433	1,9685	0,0118	0,2402
JHM807045/JHM807012 AV	101	80	50	0,3	8,2	3,9764	3,1496	1,9685	0,0118	0,3228
JLM104948/JLM104910 AV	78,6	68	50	0,3	4,7	3,0945	2,6772	1,9685	0,0118	0,1850
JLM704649/JLM704610 AV	82	67	50	0,3	4,7	3,2283	2,6378	1,9685	0,0118	0,1850
JM205149/JM205110 AV	87,5	71	50	0,3	5,2	3,4449	2,7953	1,9685	0,0118	0,2047
18337/18200 AV	82	67	50,8	0,3	6,9	3,2283	2,6378	2,0000	0,0118	0,2717
18790/18720 AV	82	67	50,8	0,3	4,5	3,2283	2,6378	2,0000	0,0118	0,1772
33889/33821 AV	92	80	50,8	0,3	6,1	3,6220	3,1496	2,0000	0,0118	0,2402
368/362A AV	86,5	71	50,8	0,3	4,6	3,4055	2,7953	2,0000	0,0118	0,1811
368A/362A AV	86,5	71	50,8	0,3	4,6	3,4055	2,7953	2,0000	0,0118	0,1811
368A/362 AV	87,5	71	50,8	0,3	4,6	3,4449	2,7953	2,0000	0,0118	0,1811
368/362 AV	87,5	71	50,8	0,3	4,6	3,4449	2,7953	2,0000	0,0118	0,1811
368A/363D AV	87,5	71	50,8	0,3	4,5	3,4449	2,7953	2,0000	0,0118	0,1772
368/363D AV	87,5	71	50,8	0,3	4,5	3,4449	2,7953	2,0000	0,0118	0,1772
375/372A AV	92	80	50,8	0,3	3,7	3,6220	3,1496	2,0000	0,0118	0,1457
3780/3720 AV	90,5	72	50,8	0,3	6,9	3,5630	2,8346	2,0000	0,0118	0,2717
NA3780SW/3729D AV	90,5	72	50,8	0,3	6,9	3,5630	2,8346	2,0000	0,0118	0,2717
3780/3720B AV	90,5	72	50,8	0,3	6,9	3,5630	2,8346	2,0000	0,0118	0,2717

AV







Maße in mm / Dimensions by mm

Maße in Zoll / Dimensions by inch

NILOS-RING	a	c	d	s	v	a	c	d	s	v
3775/3720 AV	90,5	72	50,8	0,3	6,9	3,5630	2,8346	2,0000	0,0118	0,2717
39573/39520 AV	110	96	50,8	0,5	6,9	4,3307	3,7795	2,0000	0,0197	0,2717
45285/45220 AV	101	80	50,8	0,3	6,9	3,9764	3,1496	2,0000	0,0118	0,2717
49585/49520 AV	97	78	50,8	0,3	6,9	3,8189	3,0709	2,0000	0,0118	0,2717
529X/522 AV	97	78	50,8	0,3	8,5	3,8189	3,0709	2,0000	0,0118	0,3346
529/522 AV	97	78	50,8	0,3	8,5	3,8189	3,0709	2,0000	0,0118	0,3346
529/522B AV	97	78	50,8	0,3	8,5	3,8189	3,0709	2,0000	0,0118	0,3346
537/532A AV	101	80	50,8	0,3	8,5	3,9764	3,1496	2,0000	0,0118	0,3346
HM807046/HM807010 AV	101	80	50,8	0,3	8,5	3,9764	3,1496	2,0000	0,0118	0,3346
HM807046/HM807011 AV	101	80	50,8	0,3	8,5	3,9764	3,1496	2,0000	0,0118	0,3346
55200/55437 AV	106,5	85	50,8	0,5	10,1	4,1929	3,3465	2,0000	0,0197	0,3976
HM907643/HM907614 AV	106,5	85	50,8	0,5	10,1	4,1929	3,3465	2,0000	0,0197	0,3976
619/612 AV	116,5	98	50,8	0,5	10,1	4,5866	3,8583	2,0000	0,0197	0,3976
LL205449/LL205410 AV	75,5	67	50,8	0,3	3,6	2,9724	2,6378	2,0000	0,0118	0,1417
LM104949/LM104911 AV	80	65	50,8	0,3	5,6	3,1496	2,5591	2,0000	0,0118	0,2205
LM104949/LM104912 AV	80	65	50,8	0,3	5,6	3,1496	2,5591	2,0000	0,0118	0,2205
28521/28584 AV	90,5	72	52,38	0,3	5,3	3,5630	2,8346	2,0622	0,0118	0,2087
33891/33821 AV	92	80	52,38	0,3	6,1	3,6220	3,1496	2,0622	0,0118	0,2402
4595/4535 AV	101	80	53,97	0,3	6,9	3,9764	3,1496	2,1248	0,0118	0,2717
539/532XAV	104,5	90	53,97	0,3	8,5	4,1142	3,5433	2,1248	0,0118	0,3346
6280/6220 AV	124	115	53,97	0,5	10,1	4,8819	4,5276	2,1248	0,0197	0,3976
72212/72487 AV	119	98	53,97	0,5	11,7	4,6850	3,8583	2,1248	0,0197	0,4606
66212/66462 AV	113	98	53,98	0,5	10,1	4,4488	3,8583	2,1252	0,0197	0,3976
HM807049/HM807010 AV	101	80	53,98	0,3	8,5	3,9764	3,1496	2,1252	0,0118	0,3346
LM806649/LM806610 AV	86,5	71	54,02	0,3	6,1	3,4055	2,7953	2,1268	0,0118	0,2402
HM807048/HM807010 AV	101	80	54,5	0,3	8,5	3,9764	3,1496	2,1457	0,0118	0,3346
JH307749/JH307710 AV	106,5	85	55	0,5	7,2	4,1929	3,3465	2,1654	0,0197	0,2835
JLM506849/JLM506810 AV	88,4	76	55	0,3	4,7	3,4803	2,9921	2,1654	0,0118	0,1850
JM207049/JM207010 AV	92	80	55	0,3	5,7	3,6220	3,1496	2,1654	0,0118	0,2244
28682/28622 AV	95	83	57,15	0,3	5,7	3,7402	3,2677	2,2500	0,0118	0,2244
387/382A AV	95	83	57,15	0,3	5,7	3,7402	3,2677	2,2500	0,0118	0,2244
387A/382A AV	95	83	57,15	0,3	5,7	3,7402	3,2677	2,2500	0,0118	0,2244
387/382 AV	95	83	57,15	0,3	3,7	3,7402	3,2677	2,2500	0,0118	0,1457
387A/382 AV	95	83	57,15	0,3	3,7	3,7402	3,2677	2,2500	0,0118	0,1457
39581/39520 AV	110	96	57,15	0,5	6,9	4,3307	3,7795	2,2500	0,0197	0,2717
3979/3920 AV	110	96	57,15	0,5	6,9	4,3307	3,7795	2,2500	0,0197	0,2717
462/453X AV	101	80	57,15	0,3	6,1	3,9764	3,1496	2,2500	0,0118	
623/612 AV	116,5	98	57,15	0,5	10,1	4,5866	3,8583	2,2500	0,0197	0,3976
66225/66462 AV	113	98	57,15	0,5	10,1	4,4488	3,8583	2,2500	0,0197	0,3976
L507949/L507910 AV	84,5	75	57,15	0,3	4,5	3,3268	2,9528	2,2500	0,0118	0,1772
L507949/L507910B AV	84,5	75	57,15	0,3	4,5	3,3268	2,9528	2,2500	0,0118	0,1772
388A/382A AV	95	83	57,53	0,3	5,7	3,7402	3,2677	2,2650	0,0118	0,2244
388A/383A AV	97	78	57,53	0,3	3,7	3,8189	3,0709	2,2650	0,0118	0,1457
397/394A AV	107,5	90	60	0,5	3,7	4,2323	3,5433	2,3622	0,0197	0,1457
3977/3920 AV	110	96	60	0,5	6,9	4,3307	3,7795	2,3622	0,0197	0,2717
66585/66520 AV	119	98	60	0,5	10,1	4,6850	3,8583	2,3622	0,0197	0,3976
JLM508748/JLM508710 AV	92	80	60	0,3	5,2	3,6220	3,1496	2,3622	0,0118	0,2047
28985/28920 AV	97	85	60,32	0,3	6,1	3,8189	3,3465	2,3748	0,0118	0,2402
28985/28921 AV	97	85	60,32	0,3	6,1	3,8189	3,3465	2,3748	0,0118	0,2402
3980/3920 AV	110	96	60,32	0,5	6,9	4,3307	3,7795	2,3748	0,0197	0,2717

AV






Maße in mm / Dimensions by mm

Maße in Zoll / Dimensions by inch

NILOS-RING		c	d	s	v	a	c	d	s	v
3980/3925 AV	110	96	60,32	0,5	6,9	4,3307	3,7795	2,3748	0,0197	0,2717
65500/65237 AV	121	106	60,32	0,5	10,1	4,7638	4,1732	2,3748	0,0197	0,3976
HM911245/HM911210 AV	127	104	60,33	0,5	13,2	5,0000	4,0945	2,3752	0,0197	0,5197
HM911249/HM911210 AV	127	104	61,91	0,5	13,2	5,0000	4,0945	2,4374	0,0197	0,5197
29585/29520B AV	104,5	90	63,5	0,3	6,9	4,1142	3,5433	2,5000	0,0118	0,2717
29585/29520 AV	104,5	90	63,5	0,3	6,9	4,1142	3,5433	2,5000	0,0118	0,2717
39250/39412 AV	101	80	63,5	0,3	6,1	3,9764	3,1496	2,5000	0,0118	0,2402
395/394A AV	107,5	90	63,5	0,5	3,7	4,2323	3,5433	2,5000	0,0197	0,1457
3982/3920 AV	110	96	63,5	0,3	6,9	4,3307	3,7795	2,5000	0,0197	0,2717
39585/39520 AV	110	96	63,5	0,3	6,9	4,3307	3,7795	2,5000	0,0197	0,2717
39585/39521 AV	110	96	63,5	0,3	6,9	4,3307	3,7795	2,5000	0,0197	0,2717
3982/3920B AV	110	96	63,5	0,3	6,9	4,3307	3,7795	2,5000	0,0197	0,2717
3982/3925 AV	110	96	63,5	0,3	6,9	4,3307	3,7795	2,5000	0,0197	0,2717
5584/5535 AV	119	98	63,5	0,5	7,7	4,6850	3,8583	2,5000	0,0197	0,3031
565/563 AV	121	106	63,5	0,5	8,5	4,7638	4,1732	2,5000	0,0197	0,3346
78551/78250 AV	136	110	63,5	0,5	13,5	5,3543	4,3307	2,5000	0,0197	0,5315
78550/78250 AV	136	110	63,5	0,5	13,5	5,3543	4,3307	2,5000	0,0197	0,5315
L610549/L610510 AV	90,5	80	63,5	0,3	4,5	3,5630	3,1496	2,5000	0,0118	0,1772
LL510749/LL510710 AV	90,5	80	63,5	0,3	4,5	3,5630	3,1496	2,5000	0,0118	0,1772
01/02/2513 AV	92	80	65	0,3	4,35	3,6220	3,1496	2,5591	0,0118	0,1713
399/394A AV	107,5	90	65	0,5	3,7	4,2323	3,5433	2,5591	0,0197	0,1457
JH211749/JH211710 AV	116,5	98	65	0,5	7,2	4,5866	3,8583	2,5591	0,0197	0,2835
JLM710949/JLM710910 AV	103	85	65	0,5	5,7	4,0551	3,3465	2,5591	0,0197	0,2244
JM511946/JM511910 AV	107,5	90	65	0,5	5,7	4,2323	3,5433	2,5591	0,0197	0,2244
478/472A AV	116,5	98	65,05	0,5	6,1	4,5866	3,8583	2,5610	0,0197	0,2402
478/472 AV	116,5	98	65,05	0,5	6,1	4,5866	3,8583	2,5610	0,0197	0,2402
29590/29520B AV	104,5	90	66,67	0,3	6,9	4,1142	3,5433	2,6248	0,0118	0,2717
29590/29520 AV	104,5	90	66,67	0,3	6,9	4,1142	3,5433	2,6248	0,0118	0,2717
29590/29521 AV	104,5	90	66,67	0,3	6,9	4,1142	3,5433	2,6248	0,0118	0,2717
3984/3920 AV	110	96	66,67	0,5	6,9	4,3307	3,7795	2,6248	0,0197	0,2717
3984/3920B AV	110	96	66,67	0,5	6,9	4,3307	3,7795	2,6248	0,0197	0,2717
3994/3920 AV	110	96	66,67	0,5	6,9	4,3307	3,7795	2,6248	0,0197	0,2717
39590/39520 AV	110	96	66,67	0,5	6,9	4,3307	3,7795	2,6248	0,0197	0,2717
6389/6320 AV	132	110	66,67	0,5	10,1	5,1969	4,3307	2,6248	0,0197	0,3976
6386/6320 AV	132	110	66,67	0,5	10,1	5,1969	4,3307	2,6248	0,0197	0,3976
6389/6320B AV	132	110	66,67	0,5	10,1	5,1969	4,3307	2,6248	0,0197	0,3976
H715341/H715311 AV	132	110	66,67	0,5	10,1	5,1969	4,3307	2,6248	0,0197	0,3976
HM212049/HM212010 AV	119	98	66,67	0,5	8,9	4,6850	3,8583	2,6248	0,0197	0,3504
395S/394A AV	107,5	90	66,675	0,5	3,7	4,2323	3,5433	2,6250	0,0197	0,1457
395A/394A AV	107,5	90	66,675	0,5	3,7	4,2323	3,5433	2,6250	0,0197	0,1457
560/552A AV	119	98	66,68	0,5	8,5	4,6850	3,8583	2,6252	0,0197	0,3346
399A/394D AV	107,5	90	68,263	0,5	3,7	4,2323	3,5433	2,6875	0,0197	0,1457
399A/394A AV	107,5	90	68,263	0,5	3,7	4,2323	3,5433	2,6875	0,0197	0,1457
399SA/394A AV	107,5	90	68,263	0,5	3,7	4,2323	3,5433	2,6875	0,0197	0,1457
29675/29620 AV	110	96	69,85	0,3	6,9	4,3307	3,7795	2,7500	0,0197	0,2717
47487/47420 AV	116,5	98	69,85	0,5	6,9	4,5866	3,8583	2,7500	0,0197	0,2717
482/472 AV	116,5	98	69,85	0,5	6,1	4,5866	3,8583	2,7500	0,0197	0,2402
482/472A AV	116,5	98	69,85	0,5	6,1	4,5866	3,8583	2,7500	0,0197	0,2402
482/472B AV	116,5	98	69,85	0,5	6,1	4,5866	3,8583	2,7500	0,0197	0,2402
482/472X AV	121	106	69,85	0,5	6,1	4,7638	4,1732	2,7500	0,0197	0,2402
566/563 AV	121	106	69,85	0,5	8,5	4,7638	4,1732	2,7500	0,0197	0,3346

AV







Maße in mm / Dimensions by mm

Maße in Zoll / Dimensions by inch

NILOS-RING	a	c	d	s	v	a	c	d	s	v
643/632 AV	132	110	69,85	0,5	10,1	5,1969	4,3307	2,7500	0,0197	0,3976
HM914545/HM914510 AV	142	116	69,85	0,5	13,2	5,5906	4,5669	2,7500	0,0197	0,5197
LM613449/LM613410 AV	107,5	90	69,85	0,5	6,9	4,2323	3,5433	2,7500	0,0197	0,2717
745A/742 AV	146	124	69,9	0,5	8,5	5,7480	4,8819	2,7520	0,0197	0,3346
124070/124112XC AV	110	96	70	0,3	6,7	4,3307	3,7795	2,7559	0,0197	0,2638
484/472A AV	116,5	98	70	0,5	6,1	4,5866	3,8583	2,7559	0,0197	0,2402
484/472 AV	116,5	98	70	0,5	6,1	4,5866	3,8583	2,7559	0,0197	0,2402
484/472D AV	116,5	98	70	0,5	6,1	4,5866	3,8583	2,7559	0,0197	0,2402
JLM813049/JLM813010 AV	107,5	92	70	0,5	5,7	4,2323	3,6220	2,7559	0,0197	0,2244
JM612949/JM612910 AV	113	98	70	0,5	6,2	4,4488	3,8583	3,0000	0,0197	0,2441
33281/33462 AV	113	98	71,43	0,5	6,9	4,4488	3,8583	2,8122	0,0197	0,2717
H715345/H715311 AV	132	110	71,43	0,5	10,1	5,1969	4,3307	2,8122	0,0197	0,3976
645/632 AV	132	110	71,43	0,5	10,1	5,1969	4,3307	2,8122	0,0197	0,3976
H414249/H414210 AV	132	110	71,43	0,5	10,1	5,1969	4,3307	2,8122	0,0197	0,3976
29685/29620 AV	110	96	73,02	0,3	6,9	4,3307	3,7795	2,8748	0,0197	0,2717
33287/33462 AV	113	98	73,02	0,5	6,9	4,4488	3,8583	2,8748	0,0197	0,2717
33287/33461 AV	113	98	73,02	0,5	6,9	4,4488	3,8583	2,8748	0,0197	0,2717
567/563 AV	121	106	73,025	0,5	8,5	4,7638	4,1732	2,8750	0,0197	0,3346
568/563 AV	121	106	73,817	0,5	8,4	4,7638	4,1732	2,9062	0,0197	0,3307
JH415647/JH415610 AV	142	120	75	0,5	9,2	5,5906	4,7244	2,9528	0,0197	0,3622
JLM714149/JLM714110 AV	113	98	75	0,5	6,2	4,4488	3,8583	2,9528	0,0197	0,2441
JM714249/JM714210 AV	116,5	98	75	0,5	6,2	4,5866	3,8583	2,9528	0,0197	0,2441
HM215249/HM215210 AV	127	104	76	0,5	7,5	5,0000	4,0945	2,9921	0,0197	0,2953
34300/34478 AV	119	98	76,2	0,5	7,7	4,6850	3,8583	3,0000	0,0197	0,3031
34300/34481B AV	121	106	76,2	0,5	3,7	4,7638	4,1732	3,0000	0,0197	0,1457
42688/42620 AV	124	115	76,2	0,5	8,5	4,8819	4,5276	3,0000	0,0197	0,3346
42687/42620 AV	124	115	76,2	0,5	8,5	4,8819	4,5276	3,0000	0,0197	0,3346
495A/493 AV	132	110	76,2	0,5	8,5	5,1969	4,3307	3,0000	0,0197	0,3346
NA495SW/493D AV	132	110	76,2	0,5	8,5	5,1969	4,3307	3,0000	0,0197	0,3346
495AX/493 AV	132	110	76,2	0,5	8,5	5,1969	4,3307	3,0000	0,0197	0,3346
575/572 AV	136	110	76,2	0,5	8,5	5,3543	4,3307	3,0000	0,0197	0,3346
575/572X AV	136	110	76,2	0,5	8,5	5,3543	4,3307	3,0000	0,0197	0,3346
6576/6535 AV	156	125	76,2	0,5	11,5	6,1417	4,9213	3,0000	0,0197	0,4528
6575/6535 AV	156	125	76,2	0,5	11,5	6,1417	4,9213	3,0000	0,0197	0,4528
659/654D AV	146	124	76,2	0,5	10,1	5,7480	4,8819	3,0000	0,0197	0,3976
NA659SW/654D AV	146	124	76,2	0,5	10,1	5,7480	4,8819	3,0000	0,0197	0,3976
659/652 AV	146	124	76,2	0,5	10,1	5,7480	4,8819	3,0000	0,0197	0,3976
659SW/654D AV	146	124	76,2	0,5	10,1	5,7480	4,8819	3,0000	0,0197	0,3976
6461/6420 AV	146	124	76,2	0,5	10,1	5,7480	4,8819	3,0000	0,0197	0,3976
748S/742 AV	146	124	76,2	0,5	8,5	5,7480	4,8819	3,0000	0,0197	0,3346
748S/742D AV	146	124	76,2	0,5	8,5	5,7480	4,8819	3,0000	0,0197	0,3346
755/752 AV	156	125	76,2	0,5	10,1	6,1417	4,9213	3,0000	0,0197	0,3976
HH221430/HH221410 AV	185	168	76,2	0,5	11,6	7,2835	6,6142	3,0000	0,0197	0,4567
L814749/L814710 AV	106,5	98	76,2	0,5	4,5	4,1929	3,8583	3,0000	0,0197	0,1772
5760/5735 AV	132	110	76,25	0,5	9,9	5,1969	4,3307	3,0020	0,0197	0,3898
LL714649/LL714610 AV	103	95	76,25	0,5	4,5	4,0551	3,7402	3,0020	0,0197	0,1772
42690/42620 AV	124	115	77,78	0,5	8,5	4,8819	4,5276	3,0622	0,0197	0,3346
495AS/493 AV	132	110	77,78	0,5	8,5	5,1969	4,3307	3,0622	0,0197	0,3346
HH221431/HH221410 AV	185	168	79,38	0,5	11,6	7,2835	6,6142	3,1252	0,0197	0,4567

AV







Maße in mm / Dimensions by mm

Maße in Zoll / Dimensions by inch

NILOS-RING	a	c	d	s	v	a	c	d	s	v
578/572 AV	136	110	80	0,5	8,5	5,3543	4,3307	3,1496	0,0197	0,3346
748/743 AV	146	124	80	0,5	10	5,7480	4,8819	3,1496	0,0197	0,3937
JM515649/JM515610 AV	127	104	80	0,5	6,7	5,0000	4,0945	3,1496	0,0197	0,2638
496/492A AV	132	110	80,96	0,5	8,5	5,1969	4,3307	3,1874	0,0197	0,3346
496/493 AV	132	110	80,96	0,5	8,5	5,1969	4,3307	3,1874	0,0197	0,3346
496/493S AV	132	110	80,96	0,5	8,5	5,1969	4,3307	3,1874	0,0197	0,3346
740/742 AV	146	124	80,96	0,5	8,5	5,7480	4,8819	3,1874	0,0197	0,3346
27687/27620 AV	121	106	82,55	0,5	6,1	4,7638	4,1732	3,2500	0,0197	0,2402
47685/47620B AV	132	110	82,55	0,5	7,7	5,1969	4,3307	3,2500	0,0197	0,3031
47685/47620 AV	132	110	82,55	0,5	7,7	5,1969	4,3307	3,2500	0,0197	0,3031
47686/47620 AV	132	110	82,55	0,5	7,7	5,1969	4,3307	3,2500	0,0197	0,3031
495/493 AV	132	110	82,55	0,5	8,4	5,1969	4,3307	3,2500	0,0197	0,3307
495/492A AV	132	110	82,55	0,5	8,4	5,1969	4,3307	3,2500	0,0197	0,3307
580/572B AV	136	110	82,55	0,5	8,5	5,3543	4,3307	3,2500	0,0197	0,3346
580/572A AV	136	110	82,55	0,5	8,5	5,3543	4,3307	3,2500	0,0197	0,3346
580/572 AV	136	110	82,55	0,5	8,5	5,3543	4,3307	3,2500	0,0197	0,3346
580/572X AV	136	110	82,55	0,5	8,5	5,3543	4,3307	3,2500	0,0197	0,3346
663/653 AV	142	116	82,55	0,5	10,1	5,5906	4,5669	3,2500	0,0197	0,3976
749A/742 AV	146	124	82,55	0,5	8,5	5,7480	4,8819	3,2500	0,0197	0,3346
L116149/L116110 AV	113	103	82,55	0,5	4,5	4,4488	4,0551	3,2500	0,0197	0,1772
6559/6535 AV	156	125	82,6	0,5	11,5	6,1417	4,9213	3,2520	0,0197	0,4528
757/752 AV	156	125	82,6	0,5	10,1	6,1417	4,9213	3,2520	0,0197	0,3976
27690/27620 AV	121	106	83,34	0,5	6,1	4,7638	4,1732	3,2811	0,0197	0,2402
27689/27620 AV	121	106	83,34	0,5	6,1	4,7638	4,1732	3,2811	0,0197	0,2402
498/493B AV	132	110	84,14	0,5	8,5	5,1969	4,3307	3,3126	0,0197	0,3346
498/493 AV	132	110	84,14	0,5	8,5	5,1969	4,3307	3,3126	0,0197	0,3346
9385/9321 AV	165	133	84,14	0,5	18	6,4961	5,2362	3,3126	0,0197	0,7087
JH217249/JH217210 AV	146	124	85	0,5	8,2	5,7480	4,8819	3,3465	0,0197	0,3228
JHM516849/JHM516810 AV	136	110	85	0,5	7,7	5,3543	4,3307	3,3465	0,0197	0,3031
JM716649/JM716610 AV	127	116	85	0,5	6,2	5,0000	4,5669	3,3465	0,0197	0,2441
JM716648/JM716610 AV	127	116	85	0,5	6,2	5,0000	4,5669	3,3465	0,0197	0,2441
749/742 AV	146	124	85,03	0,5	8,5	5,7480	4,8819	3,3476	0,0197	0,3346
749/742A AV	146	124	85,03	0,5	8,5	5,7480	4,8819	3,3476	0,0197	0,3346
749/742B AV	146	124	85,03	0,5	8,5	5,7480	4,8819	3,3476	0,0197	0,3346
596/592A AV	146	124	85,72	0,5	10,1	5,7480	4,8819	3,3748	0,0197	0,3976
665/653 AV	142	116	85,72	0,5	10,1	5,5906	4,5669	3,3748	0,0197	0,3976
497/493 AV	132	110	85,73	0,5	8,5	5,1969	4,3307	3,3752	0,0197	0,3346
497/492A AV	132	110	85,73	0,5	8,5	5,1969	4,3307	3,3752	0,0197	0,3346
HM617049/HM617010 AV	137	116	85,73	0,5	9,2	5,3937	4,5669	3,3752	0,0197	0,3622
HM617048/HM617010 AV	137	116	85,73	0,5	9,2	5,3937	4,5669	3,3752	0,0197	0,3622
593/592A AV	146	124	88,9	0,5	10	5,7480	4,8819	3,5000	0,0197	0,3937
6580/6535 AV	156	125	88,9	0,5	11,6	6,1417	4,9213	3,5000	0,0197	0,4567
6580/6536 AV	156	125	88,9	0,5	11,6	6,1417	4,9213	3,5000	0,0197	0,4567
759/752 AV	156	125	88,9	0,5	10,1	6,1417	4,9213	3,5000	0,0197	0,3976
NA759SW/752D AV	156	125	88,9	0,5	10,1	6,1417	4,9213	3,5000	0,0197	0,3976
759/753X AV	156	125	88,9	0,5	10,1	6,1417	4,9213	3,5000	0,0197	0,3976
77350/77675 AV	165	133	88,9	0,5	10,1	6,4961	5,2362	3,5000	0,0197	0,3976
775/772 AV	175	148	88,9	0,5	10,1	6,8898	5,8268	3,5000	0,0197	0,3976
850/832 AV	161	140	88,9	0,5	13,2	6,3386	5,5118	3,5000	0,0197	0,5197
855/854 AV	185	168	88,9	0,5	13,2	7,2835	6,6142	3,5000	0,0197	0,5197
98350/98788 AV	195	175	88,9	0,5	18,3	7,6772	6,8898	3,5000	0,0197	0,7205

AV







Maße in mm / Dimensions by mm

Maße in Zoll / Dimensions by inch

NILOS-RING	a	c	d	s	v	a	c	d	s	v
L217849/L217810 AV	121	109	88,9	0,5	4,5	4,7638	4,2913	3,5000	0,0197	0,1772
LL217849/LL217810 AV	119	109	88,9	0,5	4,5	4,6850	4,2913	3,5000	0,0197	0,1772
LM117949/LM117910 AV	127	116	88,9	0,5	3,7	5,0000	4,5669	3,5000	0,0197	0,1457
NA596SW/592D AV	146	124	88,9	0,5	14,8	5,7480	4,8819	3,5000	0,0197	0,5827
42350/42587 AV	146	124	88,95	0,5	7,7	5,7480	4,8819	3,5020	0,0197	0,3031
593/592 AV	146	124	88,95	0,5	6,9	5,7480	4,8819	3,5020	0,0197	0,2717
593A/592 AV	146	124	88,95	0,5	6,9	5,7480	4,8819	3,5020	0,0197	0,2717
6581X/6525X AV	156	125	90	0,5	10	6,1417	4,9213	3,5433	0,0197	0,3937
69354/69630 AV	156	125	90	0,5	8,4	6,1417	4,9213	3,5433	0,0197	0,3307
HM218248/HM218210 AV	142	120	90	0,5	8	5,5906	4,7244	3,5433	0,0197	0,3150
JHH221436/JHH221413 AV	185	168	90	0,5	11,6	7,2835	6,6142	3,5433	0,0197	0,4567
JHM318448/JHM318410 AV	153	132	90	0,5	8,7	6,0236	5,1969	3,5433	0,0197	0,3425
JM718149/JM718110 AV	142	122	90	0,5	8,2	5,5906	4,8031	3,5433	0,0197	0,3228
598/592A AV	146	124	92,07	0,5	10,1	5,7480	4,8819	3,6248	0,0197	0,3976
598X/592A AV	146	124	92,07	0,5	10,1	5,7480	4,8819	3,6248	0,0197	0,3976
857/854 AV	185	168	92,07	0,5	13,2	7,2835	6,6142	3,6248	0,0197	0,5197
JL819349/JL819310 AV	132	123	95	0,5	6,5	5,1969	4,8425	3,7402	0,0197	0,2559
JM719149/JM719113 AV	146	124	95	0,5	8,2	5,7480	4,8819	3,7402	0,0197	0,3228
42375/42584 AV	146	124	95,25	0,5	7,7	5,7480	4,8819	3,7500	0,0197	0,3031
42376/42587 AV	146	124	95,25	0,5	7,7	5,7480	4,8819	3,7500	0,0197	0,3031
47896/47820 AV	142	120	95,25	0,5	7,7	5,5906	4,7244	3,7500	0,0197	0,3031
52375/52618 AV	153	132	95,25	0,5	10,8	6,0236	5,1969	3,7500	0,0197	0,4252
594A/592A AV	146	124	95,25	0,5	10,1	5,7480	4,8819	3,7500	0,0197	0,3976
594/592D AV	146	124	95,25	0,5	10,1	5,7480	4,8819	3,7500	0,0197	0,3976
594A/592D AV	146	124	95,25	0,5	10,1	5,7480	4,8819	3,7500	0,0197	0,3976
77375/77676X AV	165	133	95,25	0,5	10,1	6,4961	5,2362	3,7500	0,0197	0,3976
L319249/L319210 AV	127	116	95,25	0,5	4,5	5,0000	4,5669	3,7500	0,0197	0,1772
LL319349/LL319310 AV	124	115	95,25	0,5	4,5	4,8819	4,5276	3,7500	0,0197	0,1772
NA776SW/774D AV	175	148	95,25	0,5	10,1	6,8898	5,8268	3,7500	0,0197	0,3976
683/672 AV	161	140	95,3	0,5	11,6	6,3386	5,5118	3,7520	0,0197	0,4567
864/854 AV	185	168	95,3	0,5	13,2	7,2835	6,6142	3,7520	0,0197	0,5197
42381/42584 AV	146	124	96,84	0,5	7,7	5,7480	4,8819	3,8126	0,0197	0,3031
779/772 AV	175	148	98,42	0,5	10,1	6,8898	5,8268	3,8748	0,0197	0,3976
866/854 AV	185	168	98,43	0,5	13,2	7,2835	6,6142	3,8752	0,0197	0,5197
HH221442/HH221410 AV	185	168	98,47	0,5	11,6	7,2835	6,6142	3,8768	0,0197	0,4567
HH221447/HH221410 AV	185	168	99,982	0,5	11,6	7,2835	6,6142	3,9363	0,0197	0,4567
HH221447/HH221413 AV	185	168	99,982	0,5	11,6	7,2835	6,6142	3,9363	0,0197	0,4567
HM220149/HM220110 AV	153	132	100	0,5	8,5	6,0236	5,1969	3,9370	0,0197	0,3346
JHM720249/JHM720210 AV	156	138	100	0,5	9,2	6,1417	5,4331	3,9370	0,0197	0,3622
JM720249/JM720210 AV	153	132	100	0,5	8,2	6,0236	5,1969	3,9370	0,0197	0,3228
JP10049/JP10010 AV	142	122	100	0,5	7	5,5906	4,8031	3,9370	0,0197	0,2756
52400/52618 AV	153	132	101,6	0,5	10,8	6,0236	5,1969	4,0000	0,0197	0,4252
52400/52637 AV	153	132	101,6	0,5	10,8	6,0236	5,1969	4,0000	0,0197	0,4252
52400/52637D AV	153	132	101,6	0,5	10,8	6,0236	5,1969	4,0000	0,0197	0,4252
52401/52618 AV	153	132	101,6	0,5	10,8	6,0236	5,1969	4,0000	0,0197	0,4252
687/672 AV	161	140	101,6	0,5	11,7	6,3386	5,5118	4,0000	0,0197	0,4606
NA691/672 AV	161	140	101,6	0,5	11,7	6,3386	5,5118	4,0000	0,0197	0,4606

AV






Maße in mm / Dimensions by mm


NILOS-RING	a	c	d	s	v
780/772 AV	175	148	101,6	0,5	10,1
780/772B AV	175	148	101,6	0,5	10,1
861/854D AV	185	168	101,6	0,5	13,2
861/854 AV	185	168	101,6	0,5	13,2
98400/98788 AV	195	175	101,6	0,5	18,3
HH221449/HH221410 AV	185	168	101,6	0,5	11,6
L420449/L420410 AV	132	123	101,6	0,5	5,3
LL420549/LL420510 AV	132	123	101,6	0,5	4,5
LM720648/LM720610 AV	142	130	101,6	0,5	6,9
67389/67320 AV	195	175	103,18	0,5	8,5
782/772B AV	175	148	104,77	0,5	10,1
782/772 AV	175	148	104,77	0,5	10,1
NA782/773D AV	175	148	104,77	0,5	10,1
782/774 AV	175	148	104,77	0,5	10,1
71412/71750 AV	185	168	104,82	0,5	13,2
37425/37625 AV	153	132	107,95	0,5	7,7
48190/48120 AV	156	138	107,95	0,5	8,5
56425/56650 AV	161	140	107,95	0,5	10,1
71750/71425 AV	185	168	107,95	0,5	13,2
HH224340/HH224310 AV	210	178	107,95	0,5	13,2
LM522546/LM522510 AV	156	138	107,95	0,5	8,5
NA56425SW/56650D AV	161	140	107,95	0,5	13,1
NA56425SW/56650 AV	161	140	107,95	0,5	13,1
37431/37625 AV	153	132	109,58	0,5	7,7
LM522549/LM522510 AV	156	138	109,987	0,5	8,5
64433/64700 AV	175	148	109,992	0,5	11,6
JHM522649/JHM522610 AV	175	148	110	0,5	9,2
JM822049/JM822010 AV	161	140	110	0,5	8,7
67675/67437 AV	168	142	111,12	0,5	9,3
71750/71437 AV	185	168	111,12	0,5	13,2
64450/64700 AV	175	148	114,3	0,5	11,6
64450/64701X AV	175	148	114,3	0,5	11,6
68450/68712 AV	175	148	114,3	0,5	10,1
71750/71450 AV	185	168	114,3	0,5	13,2
NA71450/71751D AV	185	168	114,3	0,5	13,2
938/932 AV	195	175	114,3	0,5	13,2
NA938/932D AV	195	175	114,3	0,5	13,2
HH224346/HH224310AV	210	178	114,3	0,5	13,2
HH224346/HH224310D AV	210	178	114,3	0,5	13,2
L623149/L623110 AV	147	135	114,3	0,5	5,3
68462/68712 AV	175	148	117,475	0,5	10
68462/68709 AV	175	148	117,475	0,5	10
L724348/L724314 AV	165	143	119,99	0,5	6,8
JM624649/JM624610 AV	175	148	120	0,5	10,5
795/792 AV	195	175	120,65	0,5	13,2
95475/95925 AV	230	214	120,65	0,5	14,8
48286/48220 AV	178	160	123,825	0,5	6,9

Maße in Zoll / Dimensions by inch

a	c	d	s	v
6,8898	5,8268	4,0000	0,0197	0,3976
6,8898	5,8268	4,0000	0,0197	0,3976
7,2835	6,6142	4,0000	0,0197	0,5197
7,2835	6,6142	4,0000	0,0197	0,5197
7,6772	6,8898	4,0000	0,0197	0,7205
7,2835	6,6142	4,0000	0,0197	0,4567
5,1969	4,8425	4,0000	0,0197	0,2087
5,1969	4,8425	4,0000	0,0197	0,1772
5,5906	5,1181	4,0000	0,0197	0,2717
7,6772	6,8898	4,0622	0,0197	0,3346
6,8898	5,8268	4,1248	0,0197	0,3976
6,8898	5,8268	4,1248	0,0197	0,3976
6,8898	5,8268	4,1248	0,0197	0,3976
6,8898	5,8268	4,1248	0,0197	0,3976
7,2835	6,6142	4,1268	0,0197	0,5197
6,0236	5,1969	4,2500	0,0197	0,3031
6,1417	5,4331	4,2500	0,0197	0,3346
6,3386	5,5118	4,2500	0,0197	0,3976
6,3386	5,5118	4,2500	0,0197	0,5157
6,3386	5,5118	4,2500	0,0197	0,5157
6,0236	5,1969	4,3142	0,0197	0,3031
6,1417	5,4331	4,3302	0,0197	0,3346
6,8898	5,8268	4,3304	0,0197	0,4567
6,8898	5,8268	4,3307	0,0197	0,3622
6,3386	5,5118	4,3307	0,0197	0,3425
6,6142	5,5906	4,3748	0,0197	0,3661
7,2835	6,6142	4,3748	0,0197	0,5197
6,8898	5,8268	4,5000	0,0197	0,4567
6,8898	5,8268	4,5000	0,0197	0,4567
6,8898	5,8268	4,5000	0,0197	0,3976
7,2835	6,6142	4,5000	0,0197	0,5197
7,2835	6,6142	4,5000	0,0197	0,5197
7,6772	6,8898	4,5000	0,0197	0,5197
7,6772	6,8898	4,5000	0,0197	0,5197
8,2677	7,0079	4,5000	0,0197	0,5197
8,2677	7,0079	4,5000	0,0197	0,5197
5,7874	5,3150	4,5000	0,0197	0,2087
6,8898	5,8268	4,6250	0,0197	0,3937
6,8898	5,8268	4,6250	0,0197	0,3937
6,4961	5,6299	4,7240	0,0197	0,2677
6,8898	5,8268	4,7244	0,0197	0,4134
7,6772	6,8898	4,7500	0,0197	0,5197
9,0551	8,4252	4,7500	0,0197	0,5827
7,0079	6,2992	4,8750	0,0197	0,2717

AV






Maße in mm / Dimensions by mm


NILOS-RING	a	c	d	s	v
48290/48220 AV	178	160	127	0,5	6,9
67388/67320 AV	195	175	127	0,5	8,5
74500/74850 AV	210	178	127	0,5	13,2
95500/95925 AV	230	214	127	0,5	14,8
NA95500/95927D AV	230	214	127	0,5	14,8
95500/95927D AV	230	214	127	0,5	14,8
97500/97900 AV	220	178	127	0,5	16,4
HH228349/HH228310 AV	245	220	127	0,5	16,4
L725349/L725311 AV	168	155	127	0,5	7,6
NA48290SW/48220D AV	178	160	127	0,5	10,8
HM926747/HM926710 AV	225	200	127,05	0,5	16,4
HM926749/HM926710 AV	225	200	127,84	0,5	16,4
48385/48320 AV	185	168	133,35	0,5	6,9
67390/67322 AV	195	175	133,35	0,5	8,5
67391/67322 AV	195	175	133,35	0,5	8,5
74525/74850 AV	210	178	133,35	0,5	13,2
NA74525/74851 AV	210	178	133,35	0,5	13,2
74525/74851 AV	210	178	133,35	0,5	13,2
95528/95925 AV	230	214	133,35	0,5	14,8
48393/48320 AV	185	168	136,52	0,5	6,9
74537/74850 AV	210	178	136,52	0,5	13,2
74537/74850B AV	210	178	136,52	0,5	13,2
896/892 AV	220	178	136,57	0,5	13,2
74550/74850 AV	210	178	139,7	0,5	13,2
898/892 AV	220	178	139,7	0,5	13,2
898/892B AV	220	178	139,7	0,5	13,2
899/892 AV	220	178	139,7	0,5	13,2
99550/99100 AV	245	220	139,7	0,5	19,8
99600/99098X AV	245	220	139,7	0,5	19,8
LM328448/LM328410 AV	185	168	139,7	0,5	6,1
48685/48620 AV	195	175	142,87	0,5	7,7
48684/48620 AV	195	175	142,87	0,5	7,7
NA48685SW/48620D AV	195	175	142,87	0,5	10,8
82576/82931 AV	230	214	146,05	0,5	13,2
HM231140/HM231110 AV	230	214	146,05	0,5	13,2
82576/82950 AV	230	214	146,05	0,5	13,2
36690/36620 AV	189	175	146,1	0,5	6,1
36690/36620D AV	189	175	146,1	0,5	6,1
99600/99100 AV	245	220	152,4	0,5	19,8
HH234048/HH234010 AV	294	255	152,4	0,5	22,7
M231649/M231610D AV	220	198	152,4	0,5	12,5
M231649/M231610 AV	220	198	152,4	0,5	12,5
46780/46720 AV	220	198	158,75	0,5	8,5
L432349/L432310 AV	200	185	158,8	0,5	6
HM237532/HM237510 AV	280	255	160,33	0,5	16,4
46790/46720 AV	220	198	165,1	0,5	8,5
67780/67720 AV	245	220	165,1	0,5	10,1

Maße in Zoll / Dimensions by inch

a	c	d	s	v
7,0079	6,2992	5,0000	0,0197	0,2717
7,6772	6,8898	5,0000	0,0197	0,3346
8,2677	7,0079	5,0000	0,0197	0,5197
9,0551	8,4252	5,0000	0,0197	0,5827
9,0551	8,4252	5,0000	0,0197	0,5827
9,0551	8,4252	5,0000	0,0197	0,5827
8,6614	7,0079	5,0000	0,0197	0,6457
9,6457	8,6614	5,0000	0,0197	0,6457
6,6142	6,1024	5,0000	0,0197	0,2992
7,0079	6,2992	5,0000	0,0197	0,4252
8,8583	8,4646	5,0020	0,0197	0,6457
8,8583	8,4646	5,0331	0,0197	0,6457
7,2835	6,6142	5,2500	0,0197	0,2717
7,6772	6,8898	5,2500	0,0197	0,3346
7,6772	6,8898	5,2500	0,0197	0,3346
8,2677	7,0079	5,2500	0,0197	0,5197
8,2677	7,0079	5,2500	0,0197	0,5197
8,2677	7,0079	5,2500	0,0197	0,5197
9,0551	8,4252	5,2500	0,0197	0,5827
7,2835	6,6142	5,3748	0,0197	0,2717
8,2677	7,0079	5,3748	0,0197	0,5197
8,2677	7,0079	5,3748	0,0197	0,5197
8,6614	7,0079	5,3768	0,0197	0,5197
8,2677	7,0079	5,5000	0,0197	0,5197
8,6614	7,0079	5,5000	0,0197	0,5197
8,6614	7,0079	5,5000	0,0197	0,5197
8,6614	7,0079	5,5000	0,0197	0,5197
9,6457	8,6614	5,5000	0,0197	0,7795
9,6457	8,6614	5,5000	0,0197	0,7795
7,2835	6,6142	5,5000	0,0197	0,2402
7,6772	6,8898	5,6248	0,0197	0,3031
7,6772	6,8898	5,6248	0,0197	0,3031
7,6772	6,8898	5,6248	0,0197	0,4252
9,0551	8,4252	5,7500	0,0197	0,5197
9,0551	8,4252	5,7500	0,0197	0,5197
9,0551	8,4252	5,7500	0,0197	0,5197
7,4409	6,8898	5,7520	0,0197	0,2402
7,4409	6,8898	5,7520	0,0197	0,2402
9,6457	8,6614	6,0000	0,0197	0,7795
11,5748	10,0394	6,0000	0,0197	0,8937
8,6614	7,7953	6,0000	0,0197	0,4921
8,6614	7,7953	6,0000	0,0197	0,4921
8,6614	7,7953	6,2500	0,0197	0,3346
7,8740	7,2835	6,2520	0,0197	0,2362
11,0236	10,0394	6,3122	0,0197	0,6457
8,6614	7,7953	6,5000	0,0197	0,3346
9,6457	8,6614	6,5000	0,0197	0,3976

AV






Maße in mm / Dimensions by mm


NILOS-RING	a	c	d	s	v
94649/94113 AV	280	255	165,1	0,5	16,4
HM237535/HM237510D AV	280	255	165,1	0,5	16,4
HM237535/HM237510 AV	280	255	165,1	0,5	16,4
94650/94113 AV	280	255	165,1	0,5	16,4
NA46790SW/46720D AV	220	198	165,1	0,5	13,1
86669/86100 AV	245	220	170	0,5	13,2
JHM534149/JHM534110 AV	225	200	170	0,5	8,3
JM734449/JM734410 AV	237	220	170	0,5	9,3
JP17049/JP17010 AV	225	215	170	0,5	9,3
HM535349/HM535310 AV	255	235	171,45	0,5	14,8
94675/94113 AV	280	255	171,5	0,5	16,4
67790/67720B AV	245	220	177,8	0,5	10,1
67790/67720 AV	245	220	177,8	0,5	10,1
NA67791/67720AV	245	220	177,8	0,5	10,1
NA67791SW/67720D AV	245	220	177,8	0,5	10,1
67791/67720 AV	245	220	177,8	0,5	10,1
94700/94113 AV	280	255	177,8	0,5	16,4
HM23754/HM237510 AV	280	255	177,8	0,5	16,4
94700/94114 AV	280	255	177,8	0,5	16,4
94700/94114D AV	280	255	177,8	0,5	16,4
JM736149/JM736110 AV	245	220	180	0,5	10,3
LL537649/LL537610 AV	230	214	184,15	0,5	7,7
LM236749/LM236710 AV	230	214	184,15	0,5	6,5
67884/67835 AV	280	255	187,37	0,5	11
JM738249/JM738210 AV	255	235	190	0,5	9,8
67885/67820 AV	260	236	190,5	0,5	10,1
93750/93125 AV	300	260	190,5	0,5	18
NA67885SW/67820D AV	260	236	190,5	0,5	13,2
LL639249/LL639210 AV	237	220	196,9	0,5	6,9
LM739749/LM739710 AV	252	235	196,9	0,5	10,1
LM739749/LM739719 AV	255	235	196,9	0,5	10,1
JHM840449/JHM840410 AV	294	255	200	0,5	14,3
67983/67920B AV	280	245	203,2	0,5	10
93800/93125 AV	300	260	203,2	0,5	18
67985/67920B AV	280	245	206,37	0,5	10
93825/93125 AV	300	260	209,6	0,5	18
93825/93127D AV	310	270	209,6	0,5	18,3
LM742749/LM742710B AV	280	255	215,9	0,5	11,6
M244249/M244210 AV	310	270	220,663	0,5	13,2
M249734/M249710 AV	350	310	228,6	0,7	18
88925/88128 AV	310	270	234,95	0,5	17,9
M246949/M246910 AV	330	290	237,4	0,5	14,8

Maße in Zoll / Dimensions by inch

a	c	d	s	v
11,0236	10,0394	6,5000	0,0197	0,6457
11,0236	10,0394	6,5000	0,0197	0,6457
11,0236	10,0394	6,5000	0,0197	0,6457
11,0236	10,0394	6,5000	0,0197	0,6457
8,6614	7,7953	6,5000	0,0197	0,5157
9,6457	8,6614	6,6929	0,0197	0,5197
8,8583	8,4646	6,6929	0,0197	0,3268
9,3307	8,6614	6,6929	0,0197	0,3661
8,8583	8,4646	6,6929	0,0197	0,3661
10,0394	9,2520	6,7500	0,0197	0,5827
11,0236	10,0394	6,7520	0,0197	0,6457
9,6457	8,6614	7,0000	0,0197	0,3976
9,6457	8,6614	7,0000	0,0197	0,3976
9,6457	8,6614	7,0000	0,0197	0,3976
9,6457	8,6614	7,0000	0,0197	0,3976
9,6457	8,6614	7,0000	0,0197	0,3976
11,0236	10,0394	7,0000	0,0197	0,6457
11,0236	10,0394	7,0000	0,0197	0,6457
11,0236	10,0394	7,0000	0,0197	0,6457
11,0236	10,0394	7,0000	0,0197	0,6457
9,6457	8,6614	7,0866	0,0197	0,4055
9,0551	8,4252	7,2500	0,0197	0,3031
9,0551	8,4252	7,2500	0,0197	0,2559
11,0236	10,0394	7,3768	0,0197	0,4331
10,0394	9,2520	7,4803	0,0197	0,3858
10,2362	9,2913	7,5000	0,0197	0,3976
11,8110	10,2362	7,5000	0,0197	0,7087
10,2362	9,2913	7,5000	0,0197	0,5197
9,3307	8,6614	7,7520	0,0197	0,2717
9,9213	9,2520	7,7520	0,0197	0,3976
10,0394	9,2520	7,7520	0,0197	0,3976
11,5748	10,0394	7,8740	0,0197	0,5630
11,0236	9,6457	8,0000	0,0197	0,3937
11,8110	10,2362	8,0000	0,0197	0,7087
11,0236	9,6457	8,1248	0,0197	0,3937
11,8110	10,2362	8,2520	0,0197	0,7087
12,2047	10,6299	8,2520	0,0197	0,7205
11,0236	10,0394	8,5000	0,0197	0,4567
12,2047	10,6299	8,6875	0,0197	0,5197
13,7795	12,2047	9,0000	0,0276	0,7087
12,2047	10,6299	9,2500	0,0197	0,7047
12,9921	11,4173	9,3465	0,0197	0,5827

AV





Maße in mm / Dimensions by mm


NILOS-RING	a	c	d	s	v
M249736/M249710 AV	350	310	237,4	0,7	18
M249749/M249710 AV	350	310	254	0,7	18
M249749/M249710D AV	350	310	254	0,7	18
K38880/K38820 AV	318	306	263,55	0,5	3,7
L853049/L853010 AV	350	310	276,23	0,7	13,2

Maße in Zoll / Dimensions by inch

a	c	d	s	v
13,7795	12,2047	9,3465	0,0276	0,7087
13,7795	12,2047	10,0000	0,0276	0,7087
13,7795	12,2047	10,0000	0,0276	0,7087
12,5197	12,0472	10,3760	0,0197	0,1457
13,7795	12,2047	10,8752	0,0197	0,5197



Notizen
Notes

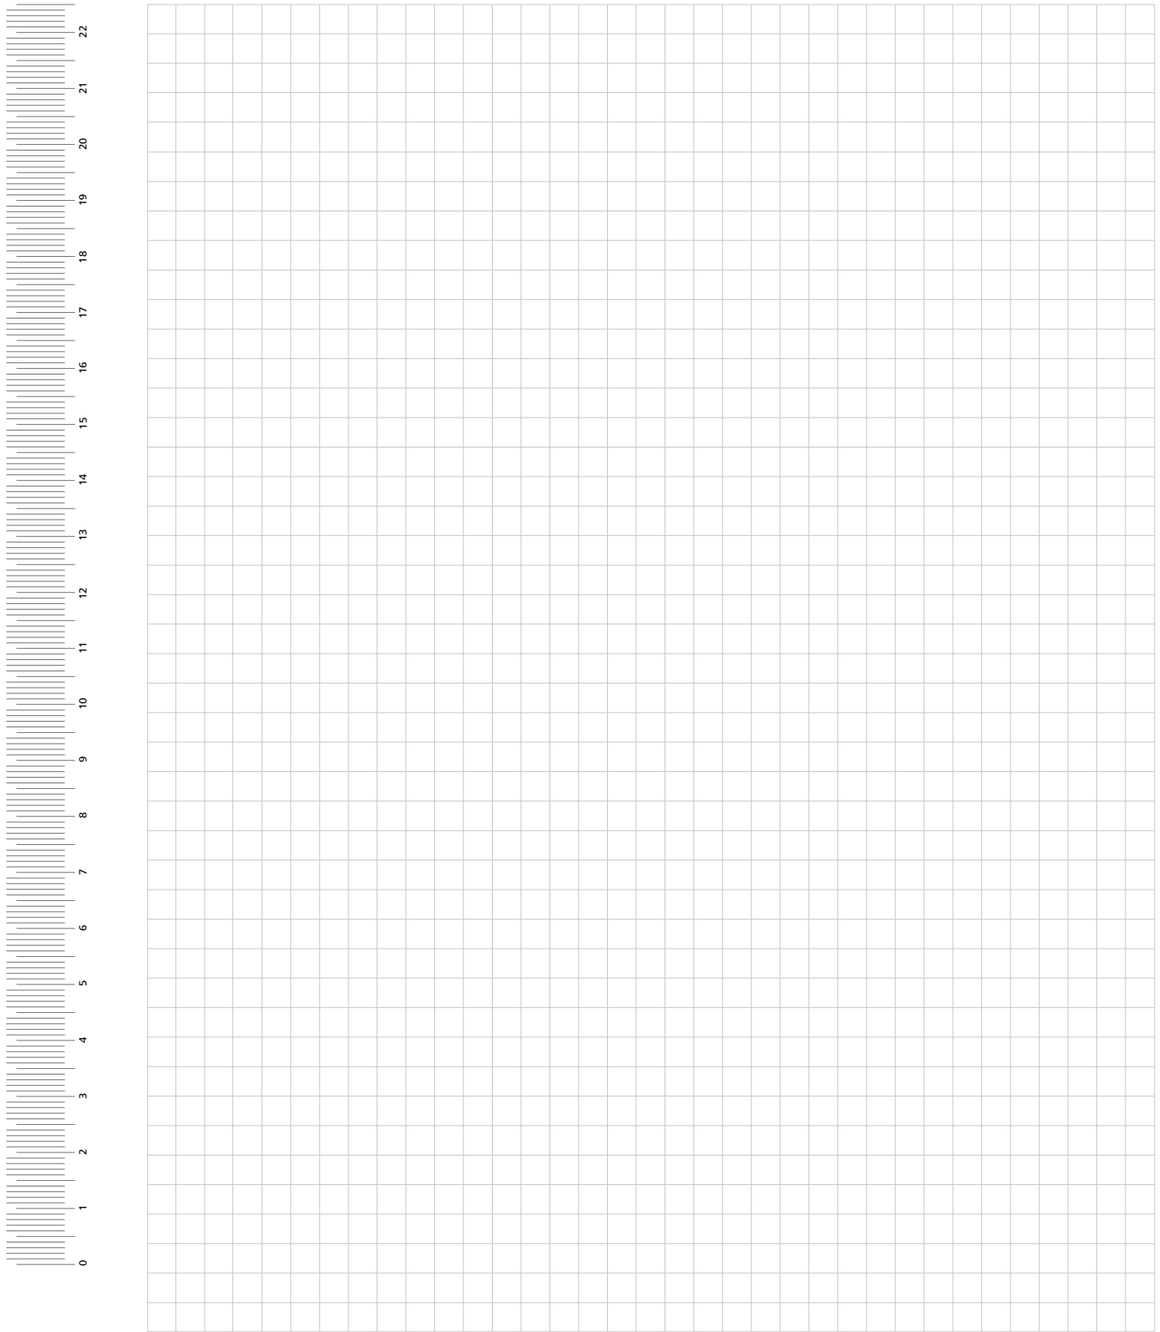

HIGH QUALITY
MADE IN GERMANY

ZILLER
GmbH & Co. KG

Ziller GmbH & Co. KG
Reisholzstraße 15
40721 Hilden
Germany

Phone: +49 2103 951 - 300

info@nilos-ring.de
www.nilos-ring.de

QR-Code scannen und
PDF-Katalog downloaden.

Scan QR code and
download PDF catalogue.

Die technischen Angaben entsprechen dem neusten Stand. Änderungen in Konstruktion und Formgestaltung, die dem Fortschritt dienen, behalten wir uns vor. Wir bitten um Verständnis, dass für Druckfehler oder Irrtümer keine Haftung übernommen werden kann. Der Nachdruck ist, auch auszugsweise, ohne unsere ausdrückliche Genehmigung nicht gestattet.

The technical information is up to date. We reserve the right to make changes in construction and design in the interest of progress. We ask for your understanding that no liability can be accepted for printing errors or mistakes. No part of this publication may be reproduced in any form or by any means without our express permission.

NR-GK-0425 / NR-GK-0425
Hiermit werden alle früheren Kataloge ungültig.
All previous catalogs are hereby invalid.