



PLUMMER BLOCKS

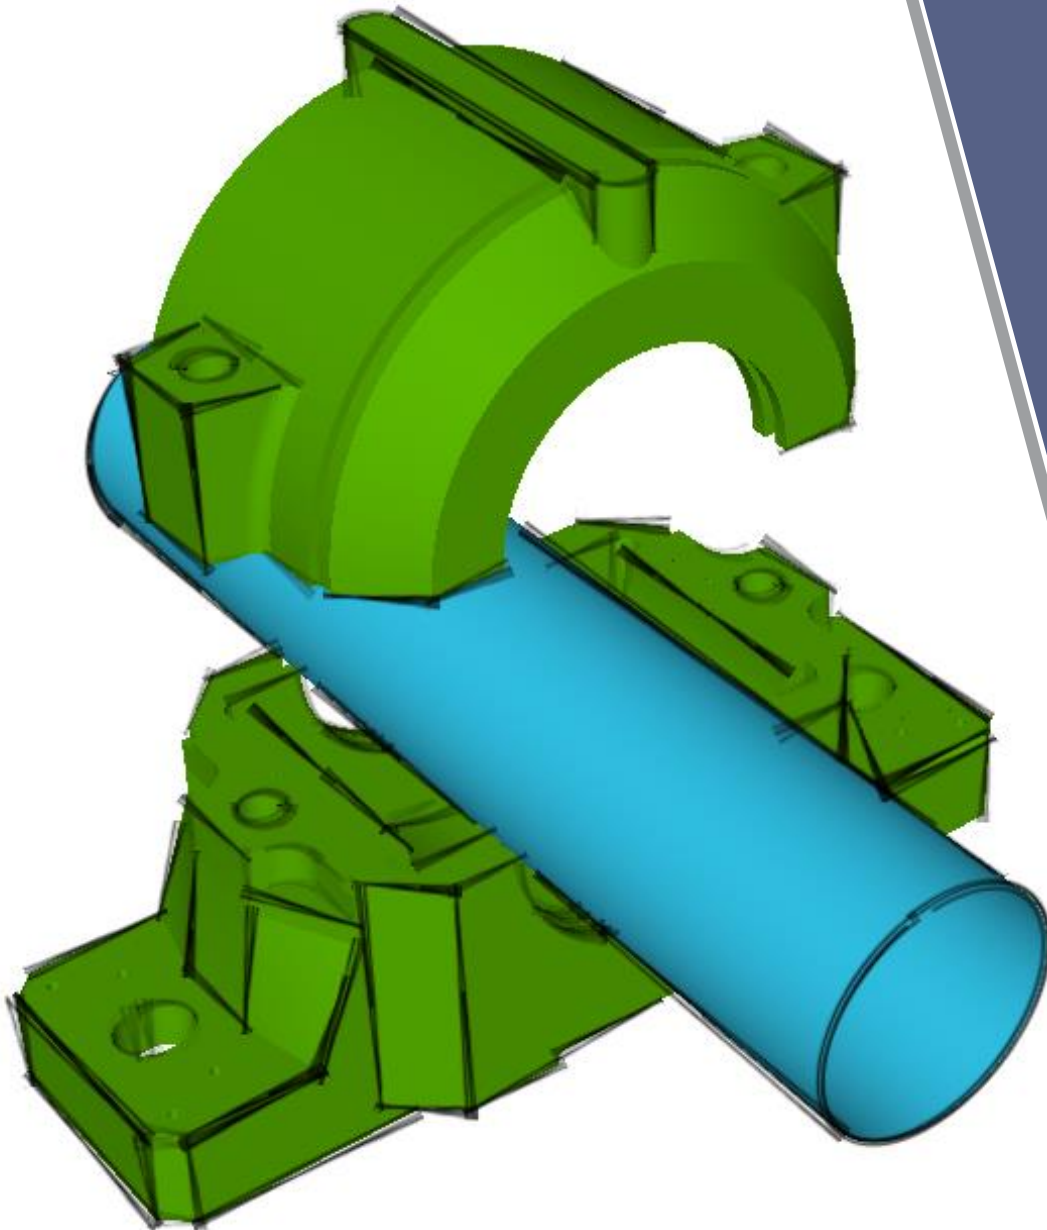

New Opportunity

Rollway Plummer Blocks benefits

- Suitable for OEM & Replacement market.
- Reduce down time for machinery during bearing replacement.
- Housings are made for shaft diameter from 25mm to 220mm.
- Optionally housings can be ordered with 2 or 4 bolts.
- Plummer blocks are suitable for Self Aligning Ball & Spherical Roller Bearings. Suites with Rollway GMEX bearings and other brand's.
- Basic hollow housing are made of cast iron. Other materials are optional.
- Available for cylindrical or tapered bore. The Rollway sleeves match perfectly in the housings.
- Large range of appropriated seals and covers for harsh operating condition.
- For a housing order, all components needs to be documented separately: Housing-, spacer ring-, seals-, bearing- and sleeve number.
- Different seal materials and designs are optional. See table on next page.

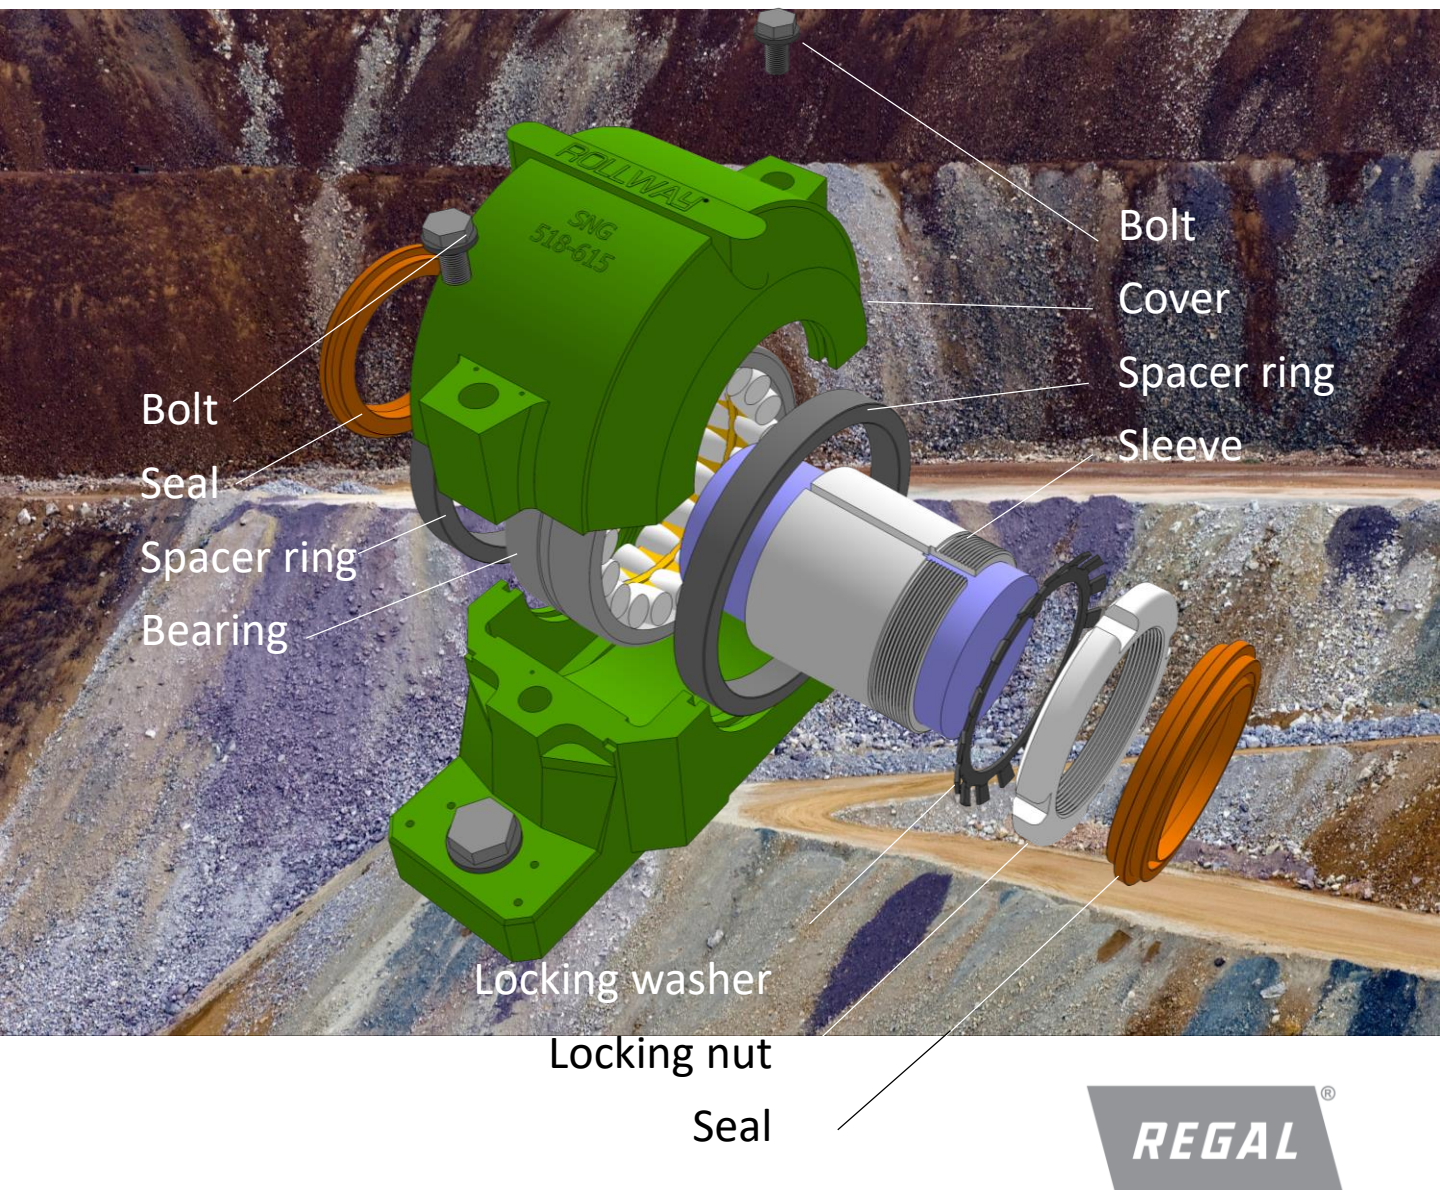

Nomenclature



Rollway housings are fully interchangeable with the major brands. Each housing type is suitable for typical bearing series, sleeves and seals.


Housing	Self Aligning ball bearing		Spherical roller bearing		Sleeves	Remark
SN 500	1205 K - 1219 K	2205 K - 2222 K	22205 K - 22232 K	23220 K - 23232 K	H(HE) 205 - 222 H(HE) 305-322 H(HE) 2306-2332 H(HE) 3124-3132	Upgraded by SNG
SN 600	1305 K - 1322 K	2305 K - 2322 K	21308 K - 21317 K	22308 K - 22332 K	H(HE)305-322 H(HE)2318-2332	
SN 200	1205 - 1222	2205 - 2222	22205 - 22232	23218 - 23232		
SN 300	1305 - 1322	2305 - 2322	21308 - 21322	22308 - 22332		
SNU 500	1205 K - 1222 K		22207 K - 22232 K	23218 K - 23232 K	H207-222 H307-322 H2318-2332 H3124-3132	Upgraded by SNG
SNG 500	1207 K - 1222 K		22207 K - 22232 K	23218 K - 23232 K	H207-222 H307-322 H2306-2332 H3124-3132	Newest design
S 3000 K			23024 K - 23056 K		H 3024 – H 3056	
SD 3000			23034 K - 23076 K		H 3034 – H 3076	
SD 3100			23134 K - 23180 K		H 3134 - H 3180 HE 3134 – HE 3140	
CSD 3100			23168 K - 23196 K		H 3168 – H 3196	
SD 500			22234 K - 22264 K		H 3134 – H 3164	
SD 600			22334 K - 22356 K		H 2334 – H 2356	
SN 3000			23024 K - 23038 K		H 3024 – H 3038	
SN 3100			23122 K - 23132 K		H 3122 – H 3132	
SAF 500	1205 K - 1222 K	2205 K - 2222 K	22209 K - 22244 K		HA 205 – HA 222 HA 305 – HA 322 HA 3124 – HA 3144	
SAF 600	1309 K - 1322 K	2309 K - 2320 K	21309 K - 21322 K	22309 K - 22340 K	HA 309 – HA 322 HA 2333 – HA 2340 HA 3124 – HA 3132	

Radial clearance is standard in CN class. Radial class C3 is optional.


Seal availability to the housing design

Seals	SN 500	SSN 500	SN 600	SSN 600	SN 200	SN 300	SN 3000	SN 3100	SNU 500	SNG 500	S 3000 K	SD 3000	SD 3100	CSD 3100	SD 500	SD 600	SAF 500	FSAF 500	SAF 600	FSAF 600	SNL500
Felt	x	x	x	x	x	x	x	x			x				x	x					
TS												x		x			x		x		
TSNG									x	x											x
TSU									x	x											
TSA												x		x							
TAC TACONITE	x								x	x			x	x	x						
TST TACONITE	x								x	x											x
U-LOCK									x	x											x
TA																					
ASNA									x	x											x




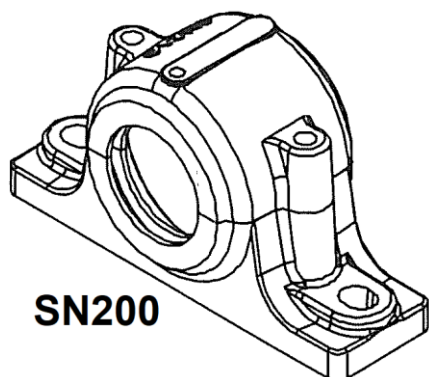


SN200

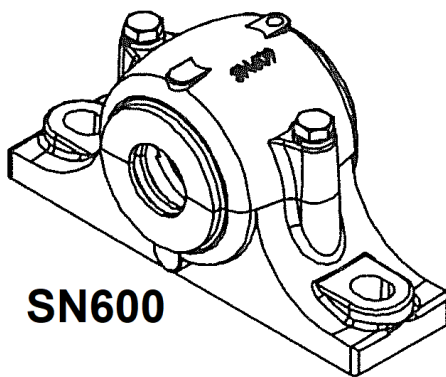

SN600

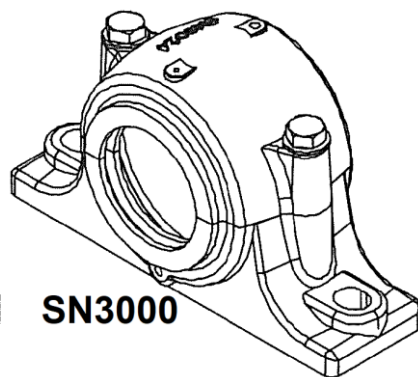


SN3000

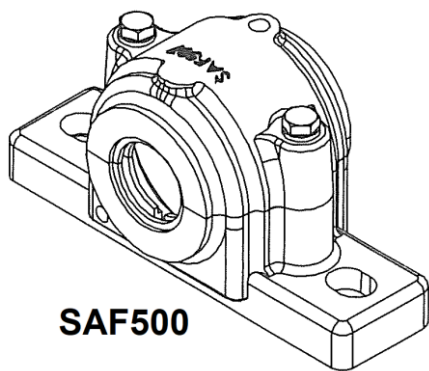


SAF500




SNG500

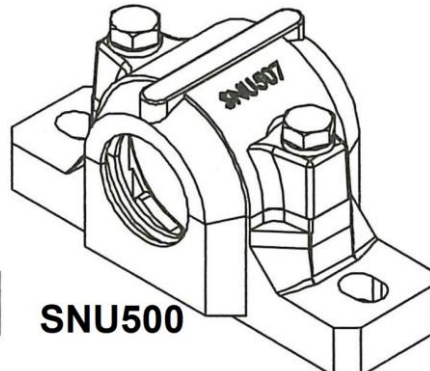


SNU500

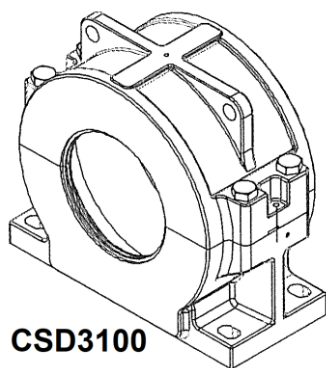

CSD3100

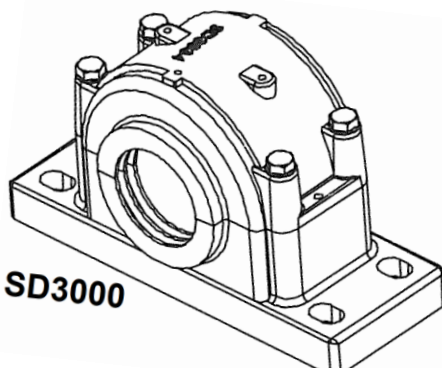

SD3000

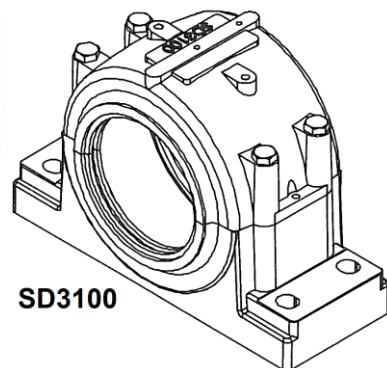

SD3100

SN, SNG, SNU, SNL are all interchangeable
SAF are inch size Plummer blocks series


Seal designs




SN 200/300
SN 500/600
SN 3000/3100
S 3000 K




SNU 500
SNG 500
SNL 500




SNU500
SNG500
SNL500




SNU 500
SNG 500
SNL 500




SN 500
SNU 500
SNG 500
SNL 500




SNU 500
SNG 500
SNL 500



SD 3100 TS
CSD 3100 TAC



SD 3100 TS
CSD 3100 TAC



SNU 500
SNG 500
SNL 500




SNU 500
SNG 500
SNL 500

ROLLWAY®




REGAL®

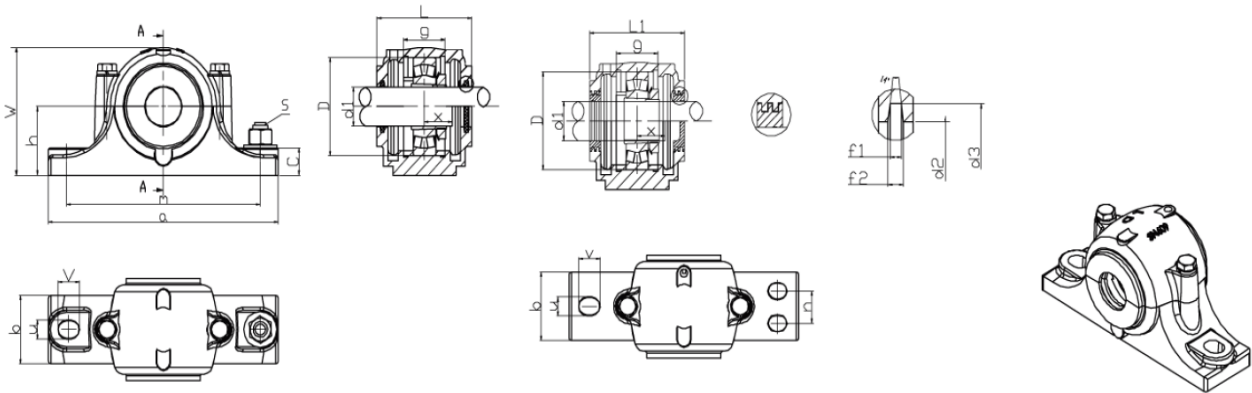


SN600 / SSN600 Plummer Block

Housing Nbr	Shaft dia (mm)	Dimensions in mm																		Weight (kg)	Bearing Nbr	Adapter Sleeve		Spacer		
		D H8	a	b	c	e	g H12	h h12	L	L1	W	n	u	v	S2 S4	d2 H12	d3 H12	f1 H13	f2					Nbr	Qty	
SN605	20	62	185	52	22	150	34	50	80	83	90	25	15	20	M12	21,5	31	3	4,2	1,9	1305K 2305K		H305 H2305	HE305 HE2305	SR62x8,5 SR62x10	2 1
SN606	25	72	185	52	22	150	37	50	82	85	95	25	15	20	M12	26,5	38	4	5,4	2,2	1306K 2306K		H306 H2306	HE306 HE2306	SR72x9 SR72X10	2 1
SN607	30	80	205	60	25	170	41	60	90	93	110	30	15	20	M12	31,5	43	4	5,4	3	1307K 2307K		H307 H2307	H307 H2307	SR80X10 SR80X10	2 1
SN608	35	90	205	60	25	170	43	60	95	100	115	30	15	20	M12	36,5	48	4	5,4	3,5	1308K 2308K	21308K 22308K	H308 H2308	HE308 HE2308	SR90X10 SR90X10	2 1
SN609	40	100	255	70	28	210	46	70	105	110	130	35	18	23	M16	41,5	53	4	5,4	4,8	1309K	21309K	H309	H309	SR100X10,5	2
SSN609																				6,5	2309K	22309K	H2309	HE2309	SR100X10	1
SN610	45	110	255	70	30	210	50	70	115	120	135	35	18	23	M16	46,5	58	4	5,4	5,6	1310K	21310K	H310	HE310	SR110X11,5	2
SSN610																				7,2	2310K	22310K	H2310	HE2310	SR110X10	1
SN611	50	120	275	80	30	230	53	80	120	125	150	40	18	23	M16	51,5	67	5	6,9	6,5	1311K	21311K	H311	HE311	SR120X12	2
SSN611																				8,9	2311K	22311K	H2311	HE2311	SR120X10	1
SN612	55	130	280	80	30	230	56	80	125	130	155	40	18	23	M16	56,5	72	5	6,9	8	1312K	21312K	H312	HE312	SR130X12,5	2
SSN612																				9,4	2312K	22312K	H2312	HE2312	SR130X10	1
SN613	60	140	315	90	32	260	58	95	130	135	175	50	22	27	M20	62	77	5	6,8	9,1	1313K	21313K	H313	HE313	SR140X12,5	2
SSN613																				12,4	2313K	22313K	H2313	HE2313	SR140X10	1
SN615	65	160	345	100	35	290	65	100	140	145	195	50	22	27	M20	67	82	5	6,8	12,9	1315K	21315K	H315	HE315	SR160X14	2
SSN615																				16,8	2315K	22315K	H2315	HE2315	SR160X10	1
SN616	70	170	345	100	35	290	68	112	145	150	212	50	22	27	M20	72	89	6	8,1	14	1316K	21316K	H316	HE316	SR170X14,5	2
SSN616																				18,8	2316K	22316K	H2316	HE2316	SR170X10	1
SN617	75	180	380	110	40	320	70	112	155	160	218	60	26	32	M24	77	94	6	8,1	16,3	1317K	21317K	H217	HE217	SR180X14,5	2
SSN617																				22,2	2317K	22317K	H317	HE317	SR180X10	1
SN618	80	190	400	110	33	320	74	112	160	165	230	60	26	35	M24	82	99	6	8,1	22,4	1318K	22318K	H318	HE218	SR190X15,5	2
SSN618																				28,1	2318K		H2318	HE318	SR190X10	1
SN619	85	200	420	120	36	350	77	125	170	175	245	70	26	35	M24	87	104	6	8,1	24,6	1319K	22319K	H319	HE219	SR200X16	2
SSN619																				31,2	2319K		H2319	HE319	SR200X10	1
SN620	90	215	420	120	38	350	83	140	175	180	280	70	26	35	M24	92	111	7	9,3	28,8	1320K	23220K	H320	HE320	SR215X18	2
SSN620																				37,5	2320K	H2320	HE2320	SR215X10	1	
SN622	100	240	460	130	40	390	90	150	190	195	300	70	28	38	M24	102	125	8	10,8	36,5	1322K	23222K	H322	HE322	SR240X20	2
SSN622																				46	2322K	H2322	HE2322	SR240X10	1	
SN624	110	260	540	160	50	450	96	160	205	210	325	90	33	42	M30	113	135	8	10,7	49		23224K	H2324	HE2324	SR260X10	2 1
SN626	115	280	560	160	50	470	103	170	215	220	350	90	33	42	M30	118	140	8	10,7	57,5		23226K	H2326	HE2326	SR280X10	2
																				74,6				1		
																				74,8		23228K	H2328	HE2328	SR300X10	2
SN628	125	300	630	170	55	520	112	180	235	240	375	90	35	45	M30	128	154	9	12,2	99,3					1	
SN630	135	320	680	180	55	560	118	190	245	250	395	90	35	45	M30	138	164	9	12,2	83,5		23230K	H2330	HE2330	SR320X10	2
SN632	140	340	710	180	60	580	124	200	255	260	415	100	42	52	M36	143	173	10	13,7	111,6						
																				110		23232K	H2332	HE2332	SR340X10	2
																				130					1	

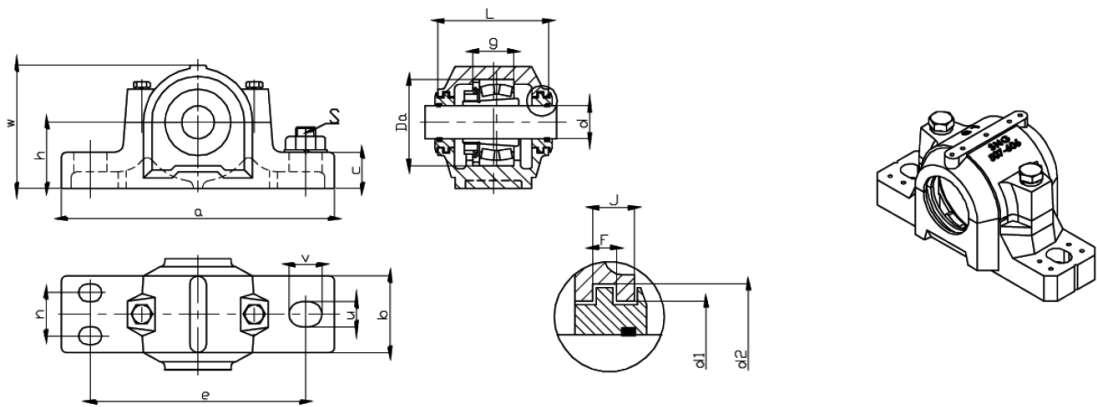


SNG500 Plummer Block

Housing Nbr	Shaft dia (mm)	Dimensions in mm																	Weight (kg)	Bearing Nbr	Adapter Sleeve	Spacer		
		D H8	a	b	c	e	g H12	h H12	L	W	u	v	n	S2	S4	d1 H12	d2 H12	J				F	Nbr	Qty
SNG507 - 606	30	72	185	52	22	150	34	50	82	92	13	20		M10		46,5	54,5	7,5	5	2,4	1207K 22207K	H207 H307	SR72X8,5 SR72X5,5	2 2
SNG508 - 607	35	80	205	60	25	170	39	60	85	106	15	20		M12		51,5	59,5	7,5	5	3,2	1208K 22208K	H208 H308	SR80X10,5 SR80X8	2 2
SNG509	40	85	205	60	25	170	30	60	85	109	15	20		M12		56,5	64,5	8,5	5	3,5	1209K 22209K	H209 H309	SR85X5,5 SR85X7	2 1
SNG510 - 608	45	90	205	60	25	170	41	60	90	112	15	20		M12		62,0	70,5	8,5	5	3,85	1210K 22210K	H210 H310	SR90X10,5 SR90X9	2 2
SNG511 - 609	50	100	255	70	28	210	44	70	95	127	18	23	35	M16	M12	67,0	75,5	8,5	5	5,2	1211K 22211K	H211 H311	SR100X11,5 SR100X9,5	2 2
SNG512 - 610	55	110	255	70	30	210	48	70	105	133	18	23	35	M16	M12	72,0	80,5	8,5	5	6,7	1212K 22212K	H212 H312	SR110X13 SR110X10	2 2
SNG513 - 611	60	120	275	80	30	230	51	80	110	148	18	24	35	M16	M12	77,0	85,5	8,5	5	7,9	1213K 22213K	H213 H313	SR120X14 SR120X10	2 2
SNG515 - 612	65	130	280	80	30	230	56	80	115	154	18	26	40	M16	M12	87,0	95,5	8,5	5	7,7	1215K 22215K	H215 H315	SR130X15,5 SR130X12,5	2 2
SNG516 - 613	70	140	315	90	32	260	58	95	120	175	22	29	40	M20	M12	92,5	101,0	10,5	5	11	1216K 22216K	H216 H316	SR140X16 SR140X12,5	2 2
SNG517	75	150	320	90	32	260	61	95	125	181	22	30	50	M20	M12	97,5	106,0	10,5	5	12,7	1217K 22217K	H217 H317	SR150X16,5 SR150X12,5	2 2
SNG518 - 615	80	160	345	100	35	290	65	100	140	192	22	27	50	M20	M16	102,5	111,0	10,5	5	14,8	1218K 22218K 23218K	H218 H318 H2318	SR160X17,5 SR160X12,5 SR160X12,5	2 2 1
SNG519 - 616	85	170	345	100	35	290	68	112	145	209	22	27	50	M20	M16	131,0	141,0	11,5	6	15,5	1219K 22219K	H219 H319	SR170X18 SR170X12,5	2 2
SNG520 - 617	90	180	380	110	40	320	70	112	160	215	26	32	60	M24	M16	137,5	147,5	11,5	6	18,4	1220K 22220K 23220K	H220 H320 H2320	SR180X18 SR180X12 SR180X9,7	2 2 1
SNG522 - 619	100	200	410	120	45	350	80	125	175	239	26	32	70	M24	M16	147,5	157,5	11,5	6	24,8	1222K 22222K 23222K	H222 H322 H2322	SR200X21 SR200X13,5 SR200X10,2	2 2 1
SNG524 - 620	110	215	410	120	45	350	86	140	185	271	26	32	70	M24	M16	157,5	167,5	11,5	6	32,2	1224K 22224K	H224 H324	SR215X14 SR215X10	2 1
SNG526	115	230	445	130	50	380	90	150	190	290	28	35	70	M24	M20	167,5	177,5	13	6	39,8	1226K 22226K	H226 H326	SR230X13 SR230X10	2 1
SNG528	125	250	500	150	50	420	98	150	205	302	35	42	80	M30	M24	177,5	187,5	13	6	48,8	1228K 22228K	H228 H328	SR250X15 SR250X10	2 1
SNG530	135	270	530	160	60	450	106	160	220	323	35	42	90	M30	M24	192,5	202,5	13,5	6	56,5	1230K 22230K	H230 H330	SR270X16,5 SR270X10	2 1
SNG532	140	290	550	160	60	470	114	170	235	344	35	42	90	M30	M24	202,5	212,5	13,5	6	63,5	1232K 22232K	H232 H332	SR290X17 SR290X10	2 1

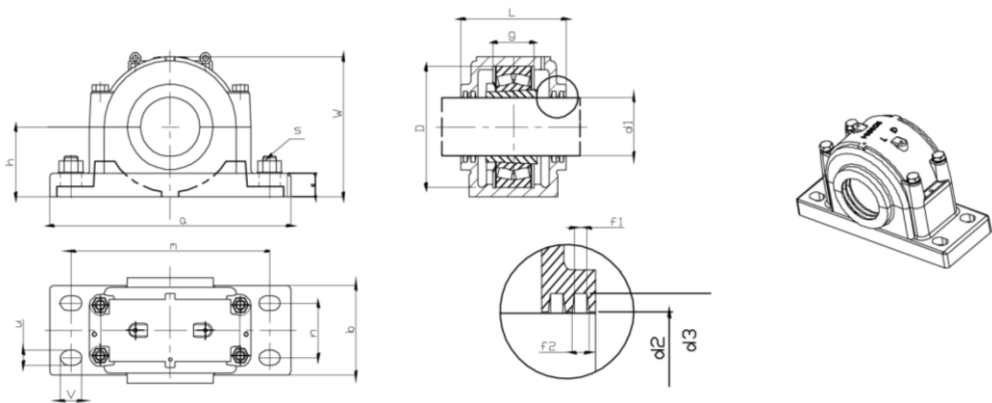


SD3000 Plummer Block

Housing Nbr	Shaft dia (mm)	Dimensions in mm																		Weight (kg)	Bearing Nbr	Adapter Sleeve	Spacer	
		D H8	a	b	c	e	g H12	h h12	L	W	n	u	v	s	d2 H12	d3 H12	f1 H13	f2	Nbr				Qty	
SD3034	150	260	540	200	50	450	77	160	230	320	110	36	52	M30	153	183	10	13,8	69,5	23034K	H3034	SR260x10	1	
SD3036	160	280	560	220	50	470	84	170	250	340	120	36	52	M30	163	193	10	13,8	87,3	23036K	H3036	SR280x10	1	
SD3038	170	290	560	220	50	470	85	170	250	345	120	36	52	M30	173	203	10	13,8	84	23038K	H3038	SR290x10	1	
SD3040	180	310	620	230	60	510	92	180	270	360	140	36	52	M30	183	213	10	13,8	87	23040K	H3040	SR310x10	1	
SD3044	200	340	700	260	65	570	100	200	290	400	160	36	55	M30	203	240	11	15,7	131,3	23044K	H3044	SR340x10	1	
SD3048	220	360	740	270	65	610	102	210	300	420	170	36	55	M30	223	260	11	15,7	150	23048K	H3048	SR360x10	1	
SD3052	240	400	820	300	70	680	114	240	330	475	190	43	62	M36	243	286	12	17,4	181,5	23052K	H3052	SR400x10	1	
SD3056	260	420	860	320	85	710	116	250	350	500	200	43	62	M36	263	306	12	17,4	230	23056K	H3056	SR420x10	1	
SD3060	280	460	920	330	85	770	128	280	360	550	210	43	62	M36	283	332	13	19,1	298	23060K	H3060	SR460x10	1	
SD3064	300	480	940	340	85	790	131	280	370	560	210	43	62	M36	303	352	13	19,1	331	23064K	H3064	SR480x10	1	
SD3068	320	520	1020	370	100	860	143	310	400	615	230	50	70	M42	323	372	13	19,1	409	23068K	H3068	SR520x10	1	
SD3072	340	540	1060	390	100	890	144	325	410	640	250	50	70	M42	343	392	13	19,1	450	23072K	H3072	SR540x10	1	
SD3076	360	560	1080	390	100	900	145	340	410	665	260	50	70	M42	363	412	13	19,1	458	23076K	H3076	SR560x10	1	

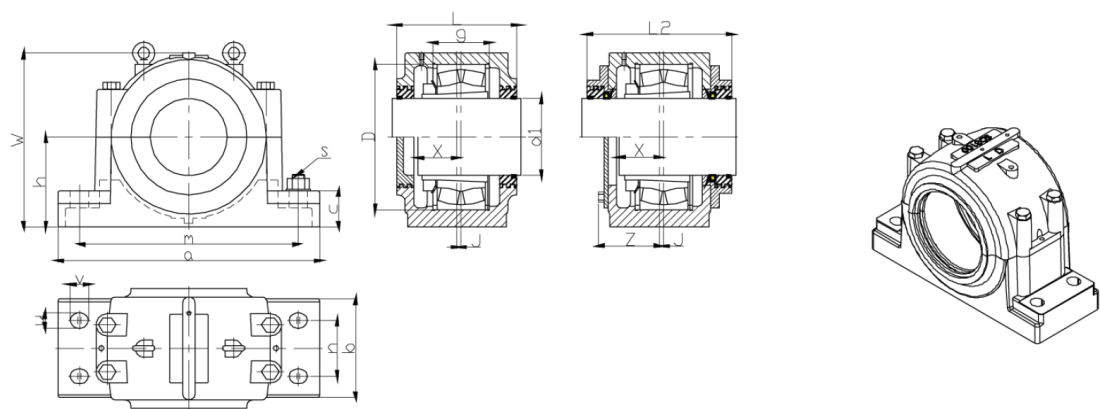

SD3100 Plummer Block

Housing Nbr	Shaft dia (mm)	Dimensions in mm																		Weight (kg)	Bearing Nbr	Adapter Sleeve	Spacer	
		H H8	a	b	c	e	g H12	h h12	L	L2	W	n	u	v	s	j	X	Z	Nbr				Qty	
SD3134	150	280	510	180	70	430	108	170	230	308	335	100	30	36	M24	14	65	120	56	23134K	H3134	SR280x10	2	
SD3136	160	300	530	190	75	450	116	180	240	318	355	110	30	36	M24	15	68	130	68	23136K	H3136	SR300x10	2	
SD3138	170	320	560	210	80	480	124	190	260	336	375	120	30	38	M24	10	80	140	72	23138K	H3138	SR320x10	2	
SD3140	180	340	610	230	85	510	132	210	280	356	410	130	35	40	M30	10	82	150	92	23140K	H3140	SR340x10	2	
SD3144	200	370	640	240	90	540	140	220	290	368	435	140	35	40	M30	12	90	155	106	23144K	H3144	SR370x10	2	
SD3148	220	400	700	260	95	600	148	240	310	388	475	150	35	40	M30	12	100	160	142	23148K	H3148	SR400x10	2	
SD3152	240	440	770	280	100	650	164	260	320	400	515	160	40	48	M36	13	105	170	165	23152K	H3152	SR440x10	2	
SD3156	260	460	790	280	105	670	166	280	320	400	550	160	42	50	M36	16	105	170	195	23156K	H3156	SR460x10	2	
SD3160	280	500	830	310	110	710	180	300	350	426	590	190	42	60	M36	22	110	190	223	23160K	H3160	SR500x10	2	
SD3164	300	540	880	330	115	750	196	320	370	448	630	200	42	60	M36	23	120	200	257	23164K	H3164	SR540x10	2	
SD3168	320	580	965	380	120	840	210	340	410	488	670	240	49	59	M45	25	135	220	488	23168K	H3168	SR580x10	2	
SD3172	340	600	1040	390	130	890	212	360	410	498	720	255	49	59	M45	22	145	225	482	23172K	H3172	SR600x10	2	
SD3176	360	620	1120	400	135	980	214	380	430	520	750	255	60	72	M55	22	145	240	540	23176K	H3176	SR620x10	2	
SD3180	380	650	1245	420	140	1050	220	400	430	552	790	270	65	78	M60	22	150	260	606	23180K	H3180	SR650x10	2	

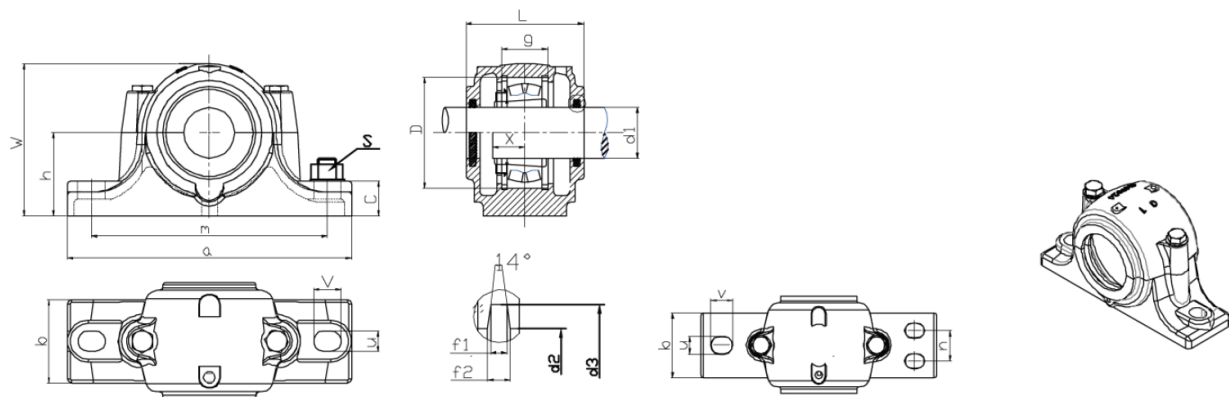

S(S)N3000 / S(S)N3100 Plummer Block

Housing Nbr	Shaft dia (mm)																			Weight (kg)	Bearing Nbr	Adapter Sleeve	Spacer	
		D H8	a	b	c	e	g H12	h h12	L	W	n	u	v	S2	S4	d2 H12	d3 H12	f1 H13	f2				Nbr	Qty
S(S)N3024	110	180	380	110	40	320	56	112	160	218	60	26	32	M24	M16	113	135	8	10,7	17	23024K	H3024	SR180X10	1
S(S)N3026	115	200	410	120	45	350	62	125	175	240	70	26	32	M24	M16	118	140	8	10,7	20	23026K	H3026	SR200X10	1
S(S)N3028	125	210	410	120	45	350	63	140	185	270	70	26	32	M24	M16	128	154	9	12,2	25	23028K	H3028	SR210X10	1
S(S)N3030	235	225	445	130	50	380	66	150	175	283	70	28	36	M24	M20	138	164	9	12,2	30	23030K	H3030	SR225X10	1
S(S)N3032	140	240	460	130	40	390	70	150	190	300	70	28	38	M24	M20	143	173	10	13,7	37	23032K	H3032	SR240X10	1
S(S)N3034	150	260	540	160	50	450	77	160	205	325	90	33	42	M30	M20	153	183	10	13,7	47	23034K	H3034	SR260X10	1
S(S)N3036	160	280	550	160	50	470	84	170	215	345	90	33	42	M30	M20	163	193	10	13,7	55	23036K	H3036	SR280X10	1
S(S)N3038	170	290	550	160	60	470	85	170	235	345	90	33	42	M30	M24	173	203	10	13,7	53	23038K	H3038	SR290X10	1
S(S)N3122	100	180	380	110	40	320	66	112	160	218	60	26	32	M24	M16	102	125	8	10,8	17	23122K	H3122	SR180X10	1
S(S)N3124	110	200	410	120	45	350	72	125	175	240	70	26	32	M24	M16	113	135	8	10,7	20	23124K	H3124	SR200X10	1
S(S)N3126	115	210	410	120	45	350	74	140	185	270	70	26	32	M24	M16	118	140	8	10,7	25	23126K	H3126	SR210X10	1
S(S)N3128	125	225	445	130	50	380	78	150	175	285	70	28	36	M24	M20	128	154	9	12,2	30	23128K	H3128	SR225X10	1
S(S)N3130	135	250	500	150	50	420	90	150	205	305	80	33	42	M30	M24	138	164	9	12,2	38	23130K	H3130	SR250X10	1
S(S)N3132	140	270	530	160	60	460	96	160	220	325	80	33	42	M30	M24	143	173	10	13,7	46	23132K	H3132	SR270X10	1

ROLLWAY®

Regal Beloit Belgium nv

Heiveldekens 16

2550 Kontich, Belgium

Call: +32(0) 457 68 70

Fax : +32(0) 457 51 38

Europe@regalbeloit.com

www.regalbeloit.com

APPLICATION CONSIDERATIONS

The proper selection and application of power transmission products and components, including the related area of product safety, is the responsibility of the customer. Operating and performance requirements and potential associated issues will vary appreciably depending upon the use and application of such products and components. The scope of the technical and application information included in this publication is necessarily limited. Unusual operating environments and conditions, lubrication requirements, loading supports, and other factors can materially affect the application and operation results of the products and components and the customer should carefully review its requirements. Any technical advice or review furnished by Regal Beloit America, Inc. and/or its affiliates ("Regal") with respect to the use of products and components is given in good faith and without charge, and Regal assumes no obligation or liability for the advice given, or results obtained, all such advice and review being given and accepted at customer's risk.

For a copy of our standard Terms and Conditions of Sales, please visit <http://regalbeloit.com> (please see link at bottom of page to "Standard Terms and Conditions of Sales"). These terms and conditions of sales, disclaimers and limitations of liability apply to any person who may buy, acquire or use Regal product referred to herein, including any person who buys from a licensed distributor of these branded products.

Regal and Rollway are trademarks of Regal Beloit Corporation or one of its affiliated companies.
©2015, 2018 Regal Beloit Corporation, All rights Reserved. MCRBB20200204E • Form# RBB20200204

The Regal logo consists of the word "REGAL" in a bold, sans-serif font, with a registered trademark symbol (®) to its upper right. The logo is set against a dark gray rectangular background that has a slight 3D effect with a lighter gray top edge.

REGAL®